



EMOS®

A brand of legrand®



Product Catalogue 2026/2027













EMOS
A brand of legrand

Batteries		**GP**				**RAVER**				**EMOS**		
		Alkaline	Carbon zinc	Rechargeable	Other	Lithium	Alkaline	Rechargeable	Other	Lead acid batteries		
Battery chargers, powerbanks, USB chargers		Battery chargers	Powerbanks	USB chargers	Universal adaptors	Car battery chargers, testers						
Portable lighting		**GP**		**EMOS**								
		Flashlights	Headlights	Metal flashlights	Plastic flashlights	Headlights	Work lights	Night lights	Display boxes	Keychains display box	Insect killer	
Lighting	**Light sources**	**LED bulbs**					For electrical appliances	ECO halogen	**LED tubes and tubes**		Car-light bulbs	
		GoSmart	Filament	Classic	Basic	Deco			PROFI PLUS	BASIC		
	Luminaires	Highbays	Dustproofs	Street lights	Floodlights	Work lights	Linear luminaires	LED panels	Drivers	Surface luminaires	Recessed luminaires	
		Emergency luminaires	Garden Lighting	Cabinet luminaires	Lamps and desk lamps	Sensors	LED strips (GoSmart)	Ambient lighting GoSmart	Batten luminaires			
	Decorations	Nano chains	Cherry chains	Decorations	Accessories							
Weather stations, thermometers, scales, others		Weather stations (GoSmart)	Thermo-meters (GoSmart)	Spare sensors	Scales	Kitchen timers	Air quality monitor GoSmart	Pet Care (GoSmart)				
TV and audio accessories		Multimedia players, radios	TV wall mounts	Universal remote controllers OFA								
Power supply extension cords, cables, plugs		Power supply extension cords and sockets		Surge protectors EMOS		Assembled cords	Cable reels		Sockets, plugs, adaptors, timers, others	Industrial plugs, 380 V sockets	Flexo, assembled cords	
		FRENCH	SCHUCO	FRENCH	SCHUCO		FRENCH	SCHUCO				
Cables		Data cables UTP, FTP	Connectors and accessories for patch cables	Twin-shielded cables CYH	Coaxial cables	Connection AV cables	Smartphone cables	Solid, flexible cables				
HF signal receiving components, antennas, electronic, accessories		Antennas	TV signal receivers	Accessories (GoSmart)								
Videophones, doorbells		Home videophones (GoSmart), sets	Cameras, surveillance (GoSmart)	Doorbells (GoSmart)								
Multimeters, testers		Multimeters, measuring cables	Testers	Measuring instruments								
Thermostats, CO and smoke alarms, measuring and control		Termostats (GoSmart)	Detectors GoSmart	CO and smoke alarms	Radiator fans	Watering timer (GoSmart)						
Installation material, tapes		Installation material	Tapes									



Making
Life
Easy

EMOS®

A brand of legrand®

A Czech brand with a European reach





For 35 years, we have been providing high-quality electrical solutions for households and professional users. Reliability, innovation, and long-term partnerships are the foundation of our growth.

We are a stable European distributor of small electrical products. Our products are available in more than 30 countries, where we cooperate with leading retail and wholesale chains as well as specialized distributors. Thanks to our own testing and strong focus on quality, we deliver solutions that serve customers every day.

EMOS is a direct distributor for the Czech Republic, Slovakia, Hungary, Slovenia, Croatia, and Poland.

Direct representation in 5 countries. | Distribution representation across Europe and selected countries overseas. | A stable partner for the B2B segment.

The basic philosophy of EMOS

Optimal price/performance ratio

- our own specialists check the products before they leave the production plant
- our own laboratory and long-term testing ensure the stability and reliability of our product portfolio

Stock availability

- modern logistics center with an area of 16,000 m²
- most of our product range is permanently in stock
- fast delivery throughout Europe

Fast and easy communication

- direct representation in five countries
- local sales teams
- dedicated B2B sales portals



Part of the Legrand multinational group

Legrand is a global specialist in electrical and digital building infrastructure. It operates in more than 90 countries worldwide and employs 40,000 people. The group offers high value-added solutions for the commercial and residential segments and invests long-term in innovation and technological development.

legrand®

www.legrandgroup.com

www.emos.eu

EMOS dealership

CZECH REPUBLIC

Headquarters and logistics centre


EMOS spol. s r.o.
Lipnická 2844
750 02 Přerov

ID No.: 19014104
tax ID No.: CZ19014104
bank account number:
296149831/0100
e-mail: emos@emos.cz

contact person: +420 581 261 111
customer centre B2B: +420 581 261 270
sales fax: +420 581 701 332

warehouse: +420 581 261 160 / 290 / 293
complaints: +420 581 261 281
GPS: 49.467587°N, 17.448671°E

OFFICE PRAGUE
EMOS spol. s r.o.
PB Park, Průmyslová 1306/7
102 00 Praha 10 – Hostivař

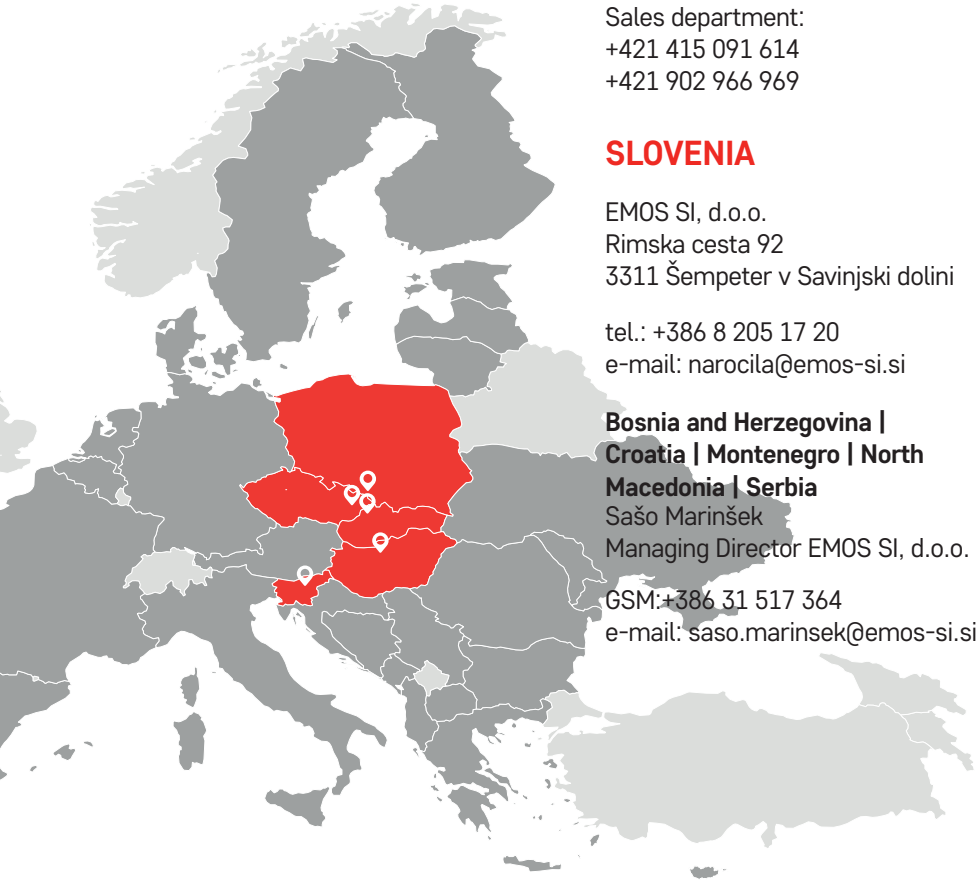

HUNGARY

EMOS HU Kft.
Budaörs Office Park, A épület
2040 Budaörs, Szabadság út 117.

tel.: +36 70 398 5891
fax: +36 23 41 42 99
e-mail: info@emos.hu

POLAND

EMOS PL Sp. z o.o.
ul. Gałczyńskiego 6
43-300 Bielsko-Biała

e-mail: biuro@emos.pl

SLOVAKIA

EMOS SK s.r.o.
Hlinická 409/22
014 01 Bytča

ID No.: 36392961
VAT No.: SK2020104834
e-mail: info@emos.sk

Sales department:
+421 415 091 614
+421 902 966 969

SLOVENIA

EMOS SI, d.o.o.
Rimska cesta 92
3311 Šempeter v Savinjski dolini

tel.: +386 8 205 17 20
e-mail: narocila@emos-si.si

Bosnia and Herzegovina | Croatia | Montenegro | North Macedonia | Serbia
Sašo Marinšek
Managing Director EMOS SI, d.o.o.

GSM: +386 31 517 364
e-mail: saso.marinsek@emos-si.si

EXPORT

Export department
Ladislav Novak
Export Manager

phone: +420 581 261 207
GSM: +420 724 597 640
e-mail: ladislav.novak@emos.cz

Estonia | Finland | Latvia | Lithuania
Raman Sinevich
Country Manager

GSM: +371 295 901 79
e-mail: raman.sinevich@legrand-ext.com

Austria | Germany | Switzerland
Nikita Maurer
Country Manager

GSM: +49 151 72161689
e-mail: nikita.maurer@legrand.com

Bulgaria | Republic of Moldova | Romania
Szabolcs Cseh
Country Manager
Baltic countries

GSM: +40 745 536 783
e-mail: szabolcs.cseh@legrand-ext.com

France | Latin America | Portugal | Spain
Nina Novakova
Key Account Manager

GSM: +420 734 742 008
e-mail: nina.novakova@emos.cz

Belgium | Denmark | Greece | Italy | Netherlands
Magdalena Zedkova
Key Account Manager Junior

GSM: + 420 725 965 625
e-mail: magdalena.zedkova@emos.cz

EMOS Group — Czech Republic | Hungary | Poland | Slovakia | Slovenia

markets served — Albania | Austria | Belgium | Bosnia and Herzegovina | Bulgaria | Chile | Colombia | Croatia | Cyprus | Denmark | Estonia | Finland | France | Germany | Greece | Italy | Latvia | Lithuania | Mauritius | Montenegro | Netherlands | North Macedonia | Norway | Peru | Portugal | Republic of Moldova | Romania | Serbia | Spain | Sweden | Switzerland | Ukraine

Making Life Easy

EMOS GoSmart

Smart living is even more affordable

Create your own smart home with EMOS GoSmart smart devices and others compatible with the TUYA platform. Connect individual products, set up automate their activities and control them remotely with the fully localized and intuitive mobile app.





SECURITY HOME

- Indoor IP cameras
- Outdoor IP cameras
- Video door phones
- Video doorbells
- Wireless doorbell
- Sensors
- Access control systems

MEASUREMENT AND REGULATION

- Thermostats
- Weather stations and thermometers
- Control valves
- Air quality

ELECTRICAL INSTALLATIONS AND CONTROLS

- Scenic controls
- Smart hubs
- Extension leads
- Sockets
- Modules

LUMINAIRES AND LIGHTING SOURCES

- Light bulbs
- LED Strips
- Luminaires
- Christmas lights
- Floodlights
- Garden lighting
- Ambient lighting

HOME AND GARDEN

- Scales
- Pet care
- Irrigation systems

EMOS GoSmart















EMOS GoSmart
is here to make your
life more pleasant,
safe and convenient.



www.emosgosmart.eu

EMOS GoSmart products

Optimal price/ performance ratio

With the affordable prices and excellent quality of EMOS GoSmart products, the smart home system becomes accessible to everyone. You can easily create your smart home with them without complicated renovation and installation of equipment.



WIDE RANGE

Dozens of EMOS GoSmart products are developed together with the world's leading manufacturers and industry leaders.

OPTIMAL PRICE AND QUALITY

EMOS GoSmart products are subject to quality control directly at the manufacturer and in our laboratory.

THE ONLY MOBILE APP

The EMOS GoSmart app allows you to control your device via your mobile device from anywhere.

TECHNICAL SUPPORT

We will provide you with technical support and help you get your EMOS GoSmart products up and running.


COMPATIBILITY AND EXPANDABILITY

Expand your smart home with EMOS GoSmart products and thousands of other TUYA-compatible products.

Advanced technology

EMOS GoSmart products communicate over a Wi-Fi network, Bluetooth or ZigBee communication protocols. You can even use voice control with their compatibility with Amazon Alexa and Google Assistant.

Wi Fi · ZigBee 3.0 · BLE · Works with Amazon Alexa Google Assistant

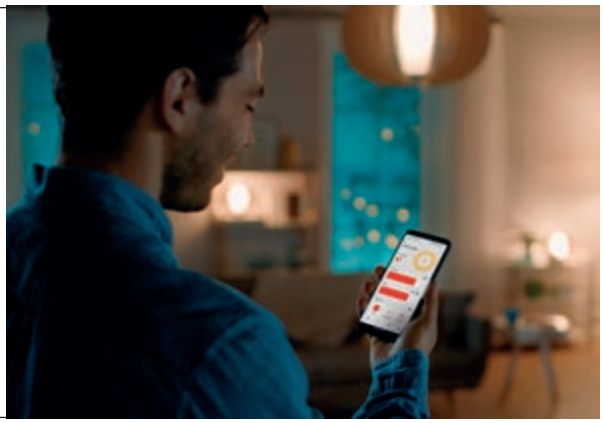


Data security and compatibility

System priorities of EMOS GoSmart

The foundation of the EMOS GoSmart system is the TUYA global platform. This platform meets the most demanding security requirements and, using encrypted communication, allows the individual devices in a smart home to be connected while maintaining compatibility and ease of use.

Renowned brands that have chosen **the TUYA platform** for their smart devices include **HAMA, LIDL, LEDVANCE, PHILIPS** and many others.

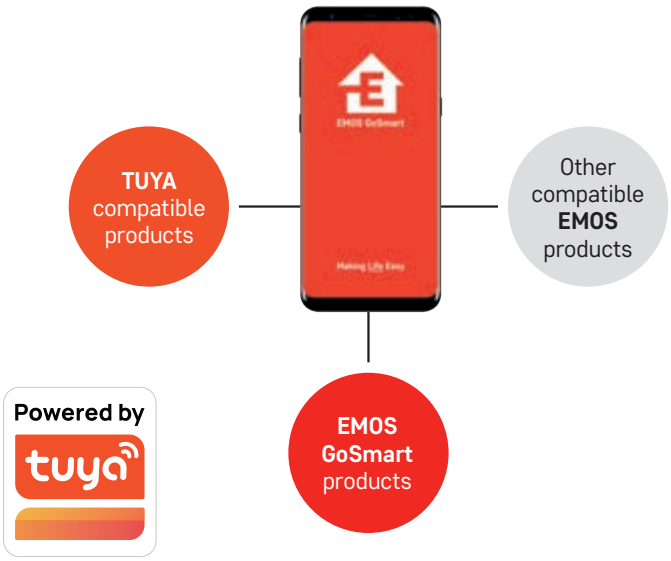

EMOS GoSmart app

Full localisation and ease of use

The EMOS GoSmart app makes it easy to control all your smart home devices via your **Android or iOS** mobile phone or tablet. Thanks to the perfect localisation, you can communicate with it in your native language.

Download on the App Store

GET IT ON Google Play



Smart control of your home



Control multiple devices



Instant connection from anywhere



Create and use intelligent scenarios



Share with your family in one tap



Easy control directly from your car



Without complicated settings, **the EMOS GoSmart app** gives you an up-to-date overview of what's happening in your home and lets you conveniently control all your smart devices remotely.

FULL LOCALISATION

With full localisation, you'll be up and running with the app. You can communicate in your native language.

EASY TO USE

You don't have to worry about complicated app control. Easy for everyone to use.

SMART SCENARIOS

Let your products work together with smart scenarios.

DEVICE MANAGEMENT

All smart home devices can be controlled with the app from anywhere.

SMART ALERTS

The app alerts you to what's happening in your home with notifications.

Let your household take care of itself and give yourself more time for your loved ones and interests.

4
GP Batteries 5
GP Consumer batteries 5
GP Alkaline 5
GP Ultra Plus alkaline cylindrical 5
GP Ultra alkaline cylindrical 7
GP Super alkaline cylindrical 10
GP Alkaline cylindrical 14
GP Alkaline 9V 16
GP Carbon Zinc 17
GP Greencell carbon zinc 17
GP Supercell carbon zinc 19
GP Carbon Zinc 9V 20
GP Lithium 21
GP Ultra Plus lithium cylindrical 21
GP Ultra lithium cylindrical 22
GP Lithium cylindrical 22
GP Lithium 9V 23
GP Lithium button 24
GP Ultra Plus lithium button 24
GP Ultra lithium button 29
GP Lithium button 30
GP Special alkaline 33
GP Ultra Plus special alkaline 33
GP Ultra special alkaline 34
GP Special alkaline 35
GP Alkaline button 36
GP Ultra Plus alkaline button 36
GP Ultra alkaline button 38
GP Alkaline button 39
GP Consumer batteries 41
GP Silver oxide 41
GP Zinc air 42
GP Rechargeable 43
GP ReCyko Pro 43
GP ReCyko 44
GP Recharge 48
GP Rechargeable 9V 48
Raver Batteries 49
Raver Lithium cylindrical 49
Raver Alkaline 50
Raver Ultra alkaline cylindrical 50
Raver Batteries 51
Raver Rechargeable 51
Raver Other batteries 52
Raver Lithium button 52
Batteries EMOS, lead acid battery 53
Lead acid batteries 53
56
Battery chargers 57
Charge 10 57
GP Battery chargers 58
EMOS Battery chargers 60
Powerbanks 61
GP Powerbanks 61
EMOS Powerbanks 62
USB chargers 65
Universal adaptors 67
Car battery chargers, testers 68
70
GP 71
Flashlights 71
GP Discovery 71
GP Everyday 73
Headlights 74
GP Xplor 74
GP Discovery 75
EMOS 77
LED Metal Flashlights 77
ULTIBRIGHT Flashlights 77
EMOS Flashlights 78
EMOS 81
LED Plastic Flashlights 81
LED Headlights 83
LED Work Lights 86
LED Rechargeable Work Lights 86
LED Work Lights 89
LED Work Lights – 230 V 90
EMOS 91
LED Rechargeable flashlights EXPERT 91
LED Bike Lights 92
LED Night Lights 94
LED Battery Night Lights 94
LED 230 V Night Lights 95
EMOS 97
LED display boxes 97
LED Keychains display box 101
Insect killer 102
103
Light sources 104
LED bulbs 104
Bulbs GoSmart 104
Filament 105
Classic 118
Basic 147
Deco 153
Light sources 156
Light bulbs for electrical appliances 156
ECO halogen 158
LED tubes, tubes 160
PROFI PLUS 160
BASIC 163
Light sources 164
Car-light bulbs 164
Luminaires 166
Highbays 166
PROFI PLUS 166
ASTER 166
CLASSIC 169
CIRUS 169
Highbays 170
Accesories 170
Dustproofs 171
PROFI PLUS 171
MISTY 171
PROFI 173
FESTY 173
ESSENTIAL 174
DUSTY 174
Street Lights 175
PROFI 175
SOLIS 175
Floodlights 176
PROFI PLUS 176
AVENO 176
PROFI 179
INOVO 179
CLASSIC 182
TAMBO 182
VISIO 186
ESSENTIAL 188
GLARO 188
Floodlights 192
Accessories 192
Work Lights 193
PROFI 193
CANNO 193
TANNO 194
ELION 194
CLASSIC 196

ILIO 196
HOBBY SLIM 197
ACCO 197
ESSENTIAL 199
GLARO 199
Linear Luminaires 201
PROFI PLUS 201
ORTO 201
LED Panels 203
PROFI PLUS 203
PROXO 203
PIXXO 204
LEXXO 205
VEXXO 205
LUXXO 206
PROFI 207
MAXXO 207
REXXO 208
BAXXO 209
CLASSIC 211
DIXXO 211
LED Panels 212
Accessories 212
Luminaires 213
Drivers 213
Surface Luminaires 214
EXCLUSIVE 214
RIVI 214
ALVI 215
ILVI 215
SABI 218
REMI 218
PROFI 219
NEXXO 219
TIVI 224
DIONI 226
FLERI 227
CLASSIC 228
TORI 228
DORI 230
ZURI 232
QARI 233
RORI 234
ESSENTIAL 235
RUBIC 235
FIONI 236
FLORI 237
Surface Luminaires 239
Others 239
Recessed Luminaires 240
EXCLUSIVE 240
SIMMI 240
PROFI 241
NEXXO 241
VIXXO 246
GERI 248
LORI 249
ESSENTIAL 250
RUBIC 250
Emergency Luminaires 251
PROFI 251
CESSI 251
NESSI 252
ORSU 253
Emergency Luminaires 255
Emergency conversion kit 255
Garden Lighting 256
EXCLUSIVE 256
Garden Lighting GoSmart 256
CLASSIC 257
BRIXO 257
SOLO 258
SPILO 259
SUNNO 259
LUNIS 260
SALVIA 260
ARTEO 261
ADENIA 262
ZALA 263
NIKA 264
OCULUS 265
CASSIA 265
MALVA 266
TILLIA 266
TERION 267
VEREA 268
LANA 268
ESSENTIAL 270
LUMI 270
Orientation Luminaires 271
CLASSIC 271
AMAL 271
ADEL 272
Cabinet Luminaires 274
CLASSIC 274
TIGO 274
GLASO 275
Lamps and desk lamps 277
Floor lamps GoSmart 277
Desk lamps 277
Grow lamps 286
Sensors 287
Sensors GoSmart 287
PIR sensors 288
Microwave sensors 291
Twilight sensors 292
LED strips 293
LED strips GoSmart 293
Ambient Lighting 294
Ambient Lighting GoSmart 294
Batten luminaires 297
PROFI PLUS 297
PANO 297
ESSENTIAL 298
MINO 298
MANO 299
Decorations 300
Nano chains 300
Nano battery chains 300
Cherry chains 301
Cherry chains 25 mm 301
Decorations 302
Party 302
Lantern 303
LED candles 303
Decorations 305
Accesories 305
306
Weather stations 306
Weather stations GoSmart 306
Weather stations 307
Thermometers 310
Thermometers 310
Spare sensors 313
Scales 315
Personal scales GoSmart 315
Personal scales 315
Kitchen, hanging scales 316
Kitchen timers 318
Air quality monitor 319

Air quality monitor GoSmart ... 319
Pet Care ... 320
Pet Care GoSmart ... 320
Pet Care ... 321
323
Multimedia players, radios ... 323
TV wall mounts ... 324
Universal remote controllers OFA ... 326
329
Power supply extension cords and sockets ... 329
FRENCH Power supply extension cords and sockets ... 329
Extension cords ... 329
1-phase 16A with rubber insulation ... 329
1-phase 16A with PVC insulation ... 330
1-phase 10A with PVC insulation ... 337
Extension Cords GoSmart ... 341
Single socket extension cords ... 342
1-phase 16A with rubber insulation ... 342
1-phase 16A with PVC weatherproof insulation ... 343
1-phase 16A with PVC insulation ... 344
1-phase 10A with PVC insulation ... 346
Two-cores PVC ... 347
FRENCH Power supply extension cords and sockets ... 348
Individual outlets ... 348
SCHUKO Power supply extension cords and sockets ... 350
Extension cords ... 350
1-phase 16A with rubber insulation ... 350
1-phase 16A with PVC insulation ... 351
Extension Cords GoSmart ... 357
Single socket extension cords ... 357
1-phase 16A with rubber insulation ... 357
1-phase 16A with PVC weatherproof insulation ... 359
1-phase 16A with PVC insulation ... 359
SCHUKO Power supply extension cords and sockets ... 361
Individual outlets ... 361
Surge protectors ... 362
Surge protectors EMOS FRENCH ... 362
Surge protectors EMOS SCHUKO ... 366
Assembled cords ... 368
1-phase rubber ... 368
3-phase rubber ... 369
Cable reels ... 370
FRENCH Cable reels ... 370
3-phase rubber ... 370
1-phase weatherproof PVC ... 371
1-phase rubber ... 372
1-phase PVC ... 374
SCHUKO Cable reels ... 377
3-phase rubber ... 377
1-phase weatherproof PVC ... 378
1-phase rubber ... 379
1-phase PVC ... 381
Sockets, plugs, adaptors, timers, others ... 383
Holders ... 383
Plugs, sockets ... 384
Sockets GoSmart ... 384
Plugs, sockets ... 386
Sockets, plugs, adaptors, timers, others ... 387
Adaptors ... 387
Travel adaptors ... 390
Timers ... 391
Energy consumption meters ... 394
Industrial plugs, 380 V sockets ... 395
Flexo, assembled cords ... 397
Rubber ... 397
Two-cores ... 397
Three-cores ... 398
PVC ... 400
Two-cores ... 400
Three-cores ... 401
404
Data cables UTP, FTP ... 405
Data cables CAT 5E ... 405
Data cables CAT 6 ... 408
Patch cables ... 409
Connectors and accessories for patch cables ... 411
Accessories for patch cables ... 411
Connectors IEC, F, reductions ... 412
Twin-shielded cables CYH ... 416
Coaxial cables ... 420
Coaxial cables 50 Ohm ... 420
Coaxial cables 75 Ohm ... 421
Connection AV cables ... 426
AV cables blister ... 426
AV cables hanger ... 426
AV cables paper blister ... 427
Smartphone cables ... 430
Solid, flexible cables ... 434
Solid cables CYKY-J ... 434
Flexible cables PVC CYSY ... 434
435
Antennas ... 435
CITY ... 435
VILLAGE ... 437
PROFI ... 438
TV signal receivers ... 440
TV signal receivers ... 440
Accessories ... 440
Wall sockets ... 441
Accessories ... 443
Combiners, splitters ... 443
Amplifiers, preamplifiers, LTE filters ... 444
Power supply units for antennas ... 446
Holders for satellite, terrestrial antennas ... 447
ZigBee GoSmart ... 448
449
Home videophones, sets ... 449
Videophones and video doorbells GoSmart ... 449
Home videophones ... 452
Accessories for videophones ... 455
Cameras, Surveillance ... 456
Cameras GoSmart ... 456
Alarms ... 459
Alarms GoSmart ... 459
Alarms ... 459
Doorbells ... 460
Wireless doorbells GoSmart ... 460
Wireless doorbells ... 461
Spare push buttons ... 466
Wired doorbells ... 468
Accessories GoSmart ... 470
471
Multimeters, measuring cables ... 472
Testers ... 475
Measuring instruments ... 477
479
Thermostats ... 479
Thermostats GoSmart ... 479
Thermostats ... 481
Detectors ... 486
Detectors GoSmart ... 486
CO and smoke detectors ... 487
Radiator fans ... 489
Watering timers ... 490
Watering timers GoSmart ... 490
Watering timers ... 491
492
Installation material ... 493
Sockets, switches ... 493
EMOS ... 493

IP20 493
IP54/IP44 497
Scene switches GoSmart 499
Modules GoSmart 500
Others 503
ABB 503
Others 503
TESLA STROPKOV 504
STANDARD – FRENCH 504
PRAKTIK – FRENCH 505
EMOS 507
CYKLONE – FRENCH 507
Installation material 508
Terminal blocks 508
Fixing of cables, clips 510
Boxes, covers 513
Installation material others 514
Transformer solders, copper, rosin 515
Tapes 516
Electroinsulating PVC tapes 516
Other tapes 520

Batteries EMOS | GP

Comprehensive energy solutions for everyday use

Batteries represent an attractive and long-term stable product range in the consumer electronics, hobby and professional applications sectors.

The portfolio includes all standard sizes of alkaline batteries and modern rechargeable batteries, which offer a more environmentally friendly and economical solution for repeated use, low self-discharge and immediate usability upon purchase.

The breadth of the portfolio allows for precise targeting of different customer needs, price points and performance requirements.



OUR TIP

Making Life Easy

Batteries



GP Batteries

GP Consumer batteries

GP Alkaline

GP Ultra Plus alkaline cylindrical

- high-performance alkaline batteries for maximum reliability
- ideal choice for powerful and demanding devices
- more energy for longer and more efficient operation
- reliable performance even in extreme temperatures
- suitable for both everyday and professional use
- shelf life up to 10 years

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 13 g
- operating temperature: -20 °C to +54 °C
- packaging: 2 pcs, small paper box







4 891199 218163

B03112 2/-/20/160

10 13 122 000

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 13 g
- operating temperature: -20 °C to +54 °C
- packaging: 4 pcs, small paper box







4 891199 203985

B03114 4/-/40/320

10 13 124 000

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 13 g
- operating temperature: -20 °C to +54 °C
- packaging: 10 pcs, small paper box




4 891199 222252

B0314G 10/-/100/400

10 17 101 000

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -20 °C to +54 °C
- packaging: 6 pcs, small paper box





4 891199 204739

B03116 6/-/96/768

10 17 126 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 24 g
- operating temperature: -20 °C to +54 °C
- packaging: 2 pcs, small paper box





4 891199 216633

B03212 2/-/20/160

10 13 222 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 24 g
- operating temperature: -20 °C to +54 °C
- packaging: 4 pcs, small paper box





4 891199 203923

B03214 4/-/40/320

10 13 224 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -20 °C to +54 °C
- packaging: 6 pcs, small paper box





4 891199 204708

B03216 6/-/96/384

10 17 226 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 28 g
- operating temperature: -20 °C to +54 °C
- packaging: 10 pcs, small paper box




4 891199 222238

B0324G 10/-/100/400

10 17 201 000

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 70 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 217654

B03312 2/-/20/160

10 13 322 000

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 142 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 220159

B03412 2/-/20/80

10 13 422 000

GP Ultra alkaline cylindrical

- optimized for medium-consumption devices
- powerful batteries for everyday use
- long-lasting power without frequent replacement
- reliable operation across a wide temperature range
- practical choice for home and office
- shelf life up to 10 years

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 218101

B02112 2/-/20/160

10 14 122 000

SALE

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 218255

B02114

10 13 124 100

4/-/40/320

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 218347

B0211V

10 13 126 000

6/-/72/864

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box





4 891199 218408

B02138

10 14 128 000

8/-/96/768

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 12 pc, small paper box





4 891199 218552

B0212F

10 14 120 120

12/-/96/768

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 217326

B02212

10 14 222 000

2/-/20/160

SALE

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 217357

B02214 4/-/40/320

10 13 224 100

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 217388

B0221V 6/-/72/576

10 13 226 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box





4 891199 217449

B02238 8/-/96/576

10 14 228 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 24 g
- operating temperature: -18 °C to +50 °C
- packaging: 12 pc, small paper box





4 891199 082931

B0222F 12/-/96/768

10 14 220 120

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 217753

B02312 2/-/20/160

10 13 322 100

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 220166

B02412 2/-/20/80

10 13 422 100

GP Super alkaline cylindrical

- ideal for low-energy consumption devices
- great price-performance ratio
- suitable for remote controls, clocks, or toys
- stable performance in everyday conditions
- shelf life up to 10 years

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink





4 891199 217968

B01102 2/40/200/1,000

10 13 102 002

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 218224

B01114 4/-/40/320

10 13 124 200

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box





4 891199 218378

B01138 8/-/96/768

10 13 128 001

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 10 pcs, small paper box



4 891199 224089

B0111G 10/-/60/480

10 13 121 001

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 20 pcs, shrink



4 891199 224577

B0110L 20/-/320/960

10 13 122 001

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 288 pcs, display box



4 891199 224430

B0114T 288/-/288/576

10 13 101 201

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink



4 891199 216671

B01202 2/40/200/600

10 13 202 002

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box



4 891199 216763

B01214 4/-/40/320

10 13 224 200

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box



4 891199 217258

B01238 8/-/96/576

10 13 228 001

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 10 pcs, small paper box



4 891199 224072

B0121G 10/-/60/480

10 13 221 001

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 20 pcs, shrink



4 891199 224546

B0120L 20/-/240/480

10 13 222 001

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 288 pcs, display box



4 891199 224416

B0124T 288/-/-/288

10 13 201 201

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink



4 891199 217814

B01302 2/-/24/192

10 13 302 001

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, shrink



4 891199 217883

B01304 4/48/-/192

10 13 304 001

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box



4 891199 217784

B01312 2/-/20/160

10 13 322 200

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink



4 891199 219061

B01402 2/-/20/80

10 13 402 001

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, shrink



4 891199 219313

B01404 4/48/-/96

10 13 404 001

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box



4 891199 220142

B01412 2/-/20/80

10 13 422 200

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: LR6 (AA battery)/LR03 (AAA battery)
- voltage: 1.5 V
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 304 pcs (AA) + 1 728 pcs (AAA)





04891199224454

B0125T 1/-/-/1

10 13 800 000

- chemical constitution: alkaline
- type: 3LR12 4.5 V (lantern battery)
- voltage: 4.5 V
- dimensions: 62 × 22 × 67 mm
- weight: 165 g
- operating temperature: -20 °C to +54 °C
- packaging: 1 pc, shrink





4 891199 056826

B1360 1/-/20/120

10 13 601 000

GP Alkaline cylindrical

- reliable batteries for low-demand devices
- simple and affordable solution
- functional in typical household environments
- great choice for occasional use
- stable operation under normal conditions
- shelf life up to 10 years

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, blister





4 891199 232763

B04114 4/-/40/320

10 24 114 000

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, blister





4 891199 232787

B04138 8/-/96/384

10 24 118 000

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C
- packaging: 10 pcs, shrink





4 891199 232848

B0410G 10/-/320/960

10 24 130 100

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C
- packaging: 20 pcs, blister





4 891199 232824

B0412L 20/-/160/480

10 24 110 200

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, blister





4 891199 232756

B04214 4/-/40/320

10 24 214 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, blister





4 891199 232770

B04238 8/-/96/384

10 24 218 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 10 pcs, shrink





4 891199 232831

B0420G 10/-/160/480

10 24 230 100

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 20 pcs, blister




4 891199 232817

B0422L 20/-/160/480
10 24 210 200

GP Alkaline 9V

- alkaline 9V batteries for reliable everyday use
- stable performance throughout the entire discharge
- suitable for smoke detectors, measuring and security devices
- long shelf life
- available in various performance ranges

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, small paper box





4 891199 216442

B03511 1/-/10/200
10 13 521 000

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, small paper box





4 891199 216398

B02511 1/-/10/200
10 13 521 100

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, small paper box





4 891199 216251

B01511 1/-/10/200
10 13 521 200

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, shrink





4 891199 216282

B01501 1/10/50/300

10 13 501 001

GP Batteries

GP Consumer batteries

GP Carbon Zinc

GP Greencell carbon zinc

- reliable batteries for low to medium power consumption devices
- economical solution for everyday use
- suitable for clocks, remote controls, and simple toys
- mercury-free, environmentally friendly
- shelf life up to 3 years

- chemical constitution: zinc-chloride
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, shrink





4 891199 014574

B12104 4/40/200/1,000

10 12 104 000

- chemical constitution: zinc-chloride
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, blister





4 891199 000478

B1211 4/-/40/480

10 12 114 000

- chemical constitution: zinc-chloride
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 12 pcs, shrink




4 891199 083945

B1210F 12/-/204/612

10 12 109 002

- chemical constitution: zinc-chloride
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 17.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, shrink




4 891199 000119

B1220 4/40/200/600

10 12 204 000

- chemical constitution: zinc-chloride
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 17.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, blister




4 891199 000133

B1221 4/-/72/288

10 12 214 000

- chemical constitution: zinc-chloride
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 17.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 12 pcs, shrink




4 891199 065118

B1220F 12/-/204/612

10 12 209 002

- chemical constitution: zinc-chloride
- type: R14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 48 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink




4 891199 000096

B1230 2/-/24/240

10 12 302 000

- chemical constitution: zinc-chloride
- type: R14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 48 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister



4 891199 000102

B1231 2/-/20/240

10 12 312 000

- chemical constitution: zinc-chloride
- type: R20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 97 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink



4 891199 000072

B1240 2/-/20/120

10 12 402 000

- chemical constitution: zinc-chloride
- type: R20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 97 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister



4 891199 000089

B1241 2/-/20/120

10 12 412 000

GP Supercell carbon zinc

- affordable batteries for basic electronics
- ideal for low current consumption devices
- suitable for alarm clocks, flashlights, and simple toys
- reliable performance for everyday use
- shelf life up to 3 years

- chemical constitution: zinc-carbon
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink



4 891199 008009

B1110 2/40/200/1,000

10 11 102 000

www.emos.eu | Order Code Item Number | Packaging Type

- chemical constitution: zinc-carbon
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 14.6 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink





4 891199 030956

B11202 2/40/200/800

10 11 202 001

GP Carbon Zinc 9V

- reliable 9V batteries for devices with low to medium energy consumption
- cost-effective solution for everyday use
- suitable for clocks, remote controls and simple toys
- without added mercury, environmentally friendly
- shelf life up to 3 years

- chemical constitution: zinc-chloride
- type: 6F22 9 V (1604)
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 36 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, shrink





4 891199 002205

B1250 1/10/-/300

10 12 501 000

- chemical constitution: zinc-chloride
- type: 6F22 9 V (1604)
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 36 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 002212

B1251 1/-/10/200

10 12 511 000

GP Batteries

GP Consumer batteries

GP Lithium

GP Ultra Plus lithium cylindrical

- high-capacity batteries for demanding devices
- optimized design for long-term operation
- reliable operation even in extreme temperatures
- suitable for smoke detectors, cameras and other devices
- shelf life up to 10 years

- chemical constitution: lithium
- type: CR123A (CR123AP, CR17345)
- voltage: 3 V
- capacity: 1 550 mAh
- dimensions: 17.0 × 34.5 mm
- weight: 16 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 001086

B1501 | 1/-/10/450

10 22 000 111

- chemical constitution: lithium
- type: CR2 (DLCR2)
- voltage: 3 V
- capacity: 800 mAh
- dimensions: 15.3 × 26.5 mm
- weight: 10 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 006999

B1506 | 1/-/10/450

10 22 000 611

GP Ultra lithium cylindrical

- high-capacity batteries for demanding devices
- lightweight design with long lifespan
- resistant to extreme temperatures
- suitable for smoke detectors, cameras, and other devices
- shelf life up to 10 years

- chemical constitution: lithium
- type: CR123A (CR123AU, CR17345)
- voltage: 3 V
- capacity: 1 400 mAh
- dimensions: 17.0 × 34.5 mm
- weight: 16 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 237447

B15012U 2/-/20/900

10 22 000 112

GP Lithium cylindrical

- lightweight design with long lifespan
- resistant to extreme temperatures
- suitable for smoke detectors, cameras, and other devices
- shelf life up to 10 years

- chemical constitution: lithium
- type: FR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 7.5 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 169328

B15112 2/-/20/160

10 22 000 412

- chemical constitution: lithium
- type: FR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 14.5 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister






4 891199 130755

B15212 2/-/20/160

10 22 000 711

- chemical constitution: lithium
- type: CR-P2 (EL223AP, DL223A)
- voltage: 6 V
- capacity: 1 400 mAh
- dimensions: 34.8 × 19.5 × 35.8 mm
- weight: 37 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 001093

B1502 1/-/10/300

10 22 000 211

- chemical constitution: lithium
- type: 2CR5 (EL2CR5BP, DL245)
- voltage: 6 V
- capacity: 1 400 mAh
- dimensions: 34 × 17 × 45 mm
- weight: 40 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 001109

B1505 1/-/10/300

10 22 000 511

GP Lithium 9V

- high-capacity lithium 9V battery for demanding devices
- lightweight design with long service life
- resistance to extreme temperatures
- ideal for smoke detectors, measuring equipment and other devices
- long shelf life up to 10 years

- chemical constitution: lithium
- type: CR-V9 (U9VL,1604LC)
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 34 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 104565

B1509 1/-/10/450

10 22 000 911

GP Batteries

GP Consumer batteries

GP Lithium button

GP Ultra Plus lithium button

- compact batteries with high energy density
- long shelf life and reliable performance
- improved technology for more efficient battery usage
- ideal for car keys, smartwatches and medical devices
- wide operating temperature range
- shelf life up to 10 years

- chemical constitution: lithium
- type: GP CR1220
- voltage: 3 V
- capacity: 36 mAh (discharge load 30 kOhm)
- dimensions: 12.5 × 2.0 mm
- weight: 0.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 004346

B15201 1/10/100/900

10 42 122 011

- chemical constitution: lithium
- type: GP CR1220
- voltage: 3 V
- capacity: 36 mAh (discharge load 30 kOhm)
- dimensions: 12.5 × 2.0 mm
- weight: 0.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 001345

B1520 5/-/100/2,000

10 42 122 015

- chemical constitution: lithium
- type: GP CR1616
- voltage: 3 V
- capacity: 50 mAh
- dimensions: 16.0 × 1.6 mm
- weight: 1.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 003691

B15601 1/10/100/900

10 42 161 611

- chemical constitution: lithium
- type: GP CR1620
- voltage: 3 V
- capacity: 75 mAh
- dimensions: 16.0 × 2.0 mm
- weight: 1.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 028151

B15701 1/10/100/900

10 42 162 011

- chemical constitution: lithium
- type: GP CR1620
- voltage: 3 V
- capacity: 75 mAh
- dimensions: 16.0 × 2.0 mm
- weight: 1.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 063886

B1570 5/-/100/2,000

10 42 162 015

- chemical constitution: lithium
- type: GP CR1632
- voltage: 3 V
- capacity: 140 mAh
- dimensions: 16.0 × 3.2 mm
- weight: 1.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 149030

B15951 1/10/100/900

10 42 163 221

- chemical constitution: lithium
- type: GP CR2016
- voltage: 3 V
- capacity: 90 mAh
- dimensions: 20.0 × 1.6 mm
- weight: 1.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 003707

B15161 1/10/100/900

10 42 201 611

- chemical constitution: lithium
- type: GP CR2016
- voltage: 3 V
- capacity: 90 mAh
- dimensions: 20.0 × 1.6 mm
- weight: 1.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 236402

B15163UP 2/-/20/720

10 42 201 623

NEW

- chemical constitution: lithium
- type: GP CR2016
- voltage: 3 V
- capacity: 90 mAh
- dimensions: 20.0 × 1.6 mm
- weight: 1.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 162329

B32164 4/-/40/2,400

10 42 201 604

- chemical constitution: lithium
- type: GP CR2016
- voltage: 3 V
- capacity: 90 mAh
- dimensions: 20.0 × 1.6 mm
- weight: 1.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 001123

B1516 5/-/100/2,000

10 42 201 615

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 003714

B15251 1/10/100/900

10 42 202 511

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 236396

B15253UP 2/-/20/720

10 42 202 523

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 162350

B15254 4/-/40/2,400

10 42 202 514

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 001130

B1525
10 42 202 515

5/-/100/2,000

- chemical constitution: lithium
- type: GP CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 003721

B15322
10 42 203 211

1/10/100/900

- chemical constitution: lithium
- type: GP CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 236389

B15323UP
10 42 203 223

2/-/20/720

- chemical constitution: lithium
- type: CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 162381

B15324
10 42 203 214

4/-/40/2,400
SALE

- chemical constitution: lithium
- type: GP CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 001147

B1532
10 42 203 215

5/-/100/2,000

- chemical constitution: lithium
- type: GP CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 200 pcs, display box





4 891199 236815

B15325UP
10 42 203 225

200/-/200/800

NEW

- chemical constitution: lithium
- type: GP CR2430
- voltage: 3 V
- capacity: 300 mAh
- dimensions: 24.5 × 3.0 mm
- weight: 4.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 003738

B15301
10 42 243 011

1/10/100/600

- chemical constitution: lithium
- type: GP CR2430
- voltage: 3 V
- capacity: 300 mAh
- dimensions: 24.5 × 3.0 mm
- weight: 4.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 001154

B1530
10 42 243 015

5/100/-/1,000

- chemical constitution: lithium
- type: GP CR2450
- voltage: 3 V
- capacity: 590 mAh
- dimensions: 24.5 × 5.0 mm
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 063916

B15851
10 42 245 011

1/-/10/600

- chemical constitution: lithium
- type: GP CR2450
- voltage: 3 V
- capacity: 590 mAh
- dimensions: 24.5 × 5.0 mm
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 063954

B1585
10 42 245 015

5/-/100/1,000

GP Ultra lithium button

- reliable performance even after long-term storage
- optimized for maximum capacity in a compact format
- ideal for smartwatches, key fobs, and medical devices
- wide operating temperature range
- shelf life up to 10 years

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 230370

B32254 4/-/40/2,400

10 42 202 524

- chemical constitution: lithium
- type: CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 230387

B32324 4/-/40/2,400

10 42 203 224

- chemical constitution: lithium
- type: GP CR2430
- voltage: 3 V
- capacity: 300 mAh
- dimensions: 24.5 × 3.0 mm
- weight: 4.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 230400

B32304 4/-/40/960

10 42 243 014

- chemical constitution: lithium
- type: GP CR2450
- voltage: 3 V
- capacity: 590 mAh
- dimensions: 24.5 × 5.0 mm
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 230417

B32854 4/-/40/960

10 42 245 014

GP Lithium button

- low self-discharge and stable performance
- compact size with high energy capacity
- ideal for smartwatches, key fobs and medical devices
- wide operating temperature range
- shelf life up to 10 years

super strong

300 charging cycles

- chemical constitution: lithium
- type: GP CR1/3N
- voltage: 3 V
- capacity: 160 mAh
- dimensions: 11.6 × 10.8 mm
- weight: 3.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 028175

B15711 1/-/10/720

10 42 103 011

- chemical constitution: lithium
- type: GP CR1025
- voltage: 3 V
- capacity: 30 mAh
- dimensions: 10.0 × 2.5 mm
- weight: 0.7 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 211485

B15101 1/-/10/900

10 42 102 511

- chemical constitution: lithium
- type: GP CR1216
- voltage: 3 V
- capacity: 30 mAh (discharge load 30 kOhm)
- dimensions: 12.5 × 1.6 mm
- weight: 0.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 028144

B15651 1/10/100/900

10 42 121 611

- chemical constitution: lithium
- type: GP CR1216
- voltage: 3 V
- capacity: 30 mAh (discharge load 30 kOhm)
- dimensions: 12.5 × 1.6 mm
- weight: 0.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 063848

B1565 5/100/-/2,000

10 42 121 615

SALE

- chemical constitution: lithium
- type: GP CR1225
- voltage: 3 V
- capacity: 62 mAh
- dimensions: 12.5 × 2.5 mm
- weight: 1.0 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 205255

B15221 1/10/100/900

10 42 122 511

- chemical constitution: lithium
- type: GP CR2320
- voltage: 3 V
- capacity: 130 mAh
- dimensions: 23.0 × 2.0 mm
- weight: 3,0 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 211980

B15451 1/-/10/900

10 42 232 011

- chemical constitution: lithium
- type: GP CR2325
- voltage: 3 V
- capacity: 190 mAh
- dimensions: 23.0 × 2.5 mm
- weight: 3.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 205286

B15431 1/-/10/900

10 42 232 511

- chemical constitution: lithium
- type: GP CR2330
- voltage: 3 V
- capacity: 260 mAh
- dimensions: 23.0 × 3.0 mm
- weight: 4.0 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 205316

B15441 1/-/10/900

10 42 233 011

- chemical constitution: lithium
- type: GP CR2354
- voltage: 3 V
- capacity: 560 mAh
- dimensions: 23.0 × 5.4 mm
- weight: 6.9 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 204234

B15231 1/-/10/900

10 42 235 411

- chemical constitution: lithium
- type: GP CR2477
- voltage: 3 V
- capacity: 590 mAh
- dimensions: 24.5 × 7.7 mm
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 211270

B15771
10 42 247 711

1/-/10/600

- chemical constitution: lithium
- type: GP CR3032
- voltage: 3 V
- capacity: 500 mAh
- dimensions: 30.0 × 3.2 mm
- weight: 6.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 204265

B15331
10 42 303 211

1/-/10/600

- chemical constitution: lithium
- type: GP CR1616
- voltage: 3 V
- capacity: 50 mAh
- dimensions: 16.0 × 1.6 mm
- weight: 1.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 001116

B1560
10 42 161 615

5/-/100/2,000

- chemical constitution: lithium
- type: GP CR1632
- voltage: 3 V
- capacity: 140 mAh
- dimensions: 16.0 × 3.2 mm
- weight: 1.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 149061

B1595
10 42 163 215

5/100/-/2,000

GP Batteries

GP Consumer batteries

GP Special alkaline

GP Ultra Plus special alkaline

- ideal for devices with higher power demands
- reliable performance thanks to stable voltage
- suitable for toys, cameras and other electronics
- long-lasting performance in various conditions
- shelf life up to 3 years

- chemical constitution: alkaline-special
- type: GP 23AF (V23GA, MN21, A23)
- voltage: 12 V
- capacity: 55 mAh (discharge load 20 kOhm)
- dimensions: 10.22 × 28.2 mm
- weight: 7.9 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 042119

B13001 1/-/10/720

10 21 002 311

- chemical constitution: alkaline-special
- type: GP 23AF (V23GA, MN21, A23)
- voltage: 12 V
- capacity: 55 mAh (discharge load 20 kOhm)
- dimensions: 10.22 × 28.2 mm
- weight: 7.9 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 042140

B1300 5/-/100/1,000

10 21 002 315

- chemical constitution: alkaline-special
- type: GP 27A (A27, MN27, A90)
- voltage: 12 V
- capacity: 20 mAh (discharge load 20 kOhm)
- dimensions: 8.0 × 28.2 mm
- weight: 4.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003783

B13011 1/-/10/720

10 21 002 711

- chemical constitution: alkaline-special
- type: GP 27A (A27, MN27, A90)
- voltage: 12 V
- capacity: 20 mAh (discharge load 20 kOhm)
- dimensions: 8.0 × 28.2 mm
- weight: 4.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 011504

B1301 5/-/100/1,000

10 21 002 715

- chemical constitution: alkaline-special
- type: GP 910A (N, LR1)
- voltage: 1.5 V
- capacity: 885 mAh (discharge load 20 kOhm)
- dimensions: 12.0 × 30.2 mm
- weight: 9 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 000065

B1305 2/-/20/160

10 21 091 012

- chemical constitution: alkaline-special
- type: GP 25A (AAAA, LR61, LR8, MN2500)
- voltage: 1.5 V
- capacity: 525 mAh (discharge load 42 kOhm)
- dimensions: 8.3 × 42.5 mm
- weight: 6.8 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 058615

B1306 2/-/20/160

10 21 002 512

GP Ultra special alkaline

- reliable 9V batteries for devices with low to medium energy consumption
- cost-effective solution for everyday use
- suitable for clocks, remote controls and simple toys
- without added mercury, environmentally friendly
- shelf life up to 3 years

- chemical constitution: alkaline-special
- type: GP 23A (V23GA, MN21, A23)
- voltage: 12 V
- capacity: 55 mAh (discharge load 20 kOhm)
- dimensions: 10.22 × 28.2 mm
- weight: 7.9 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, blister





4 891199 233173

B30234 4/-/40/960

10 21 230 003

GP Special alkaline

- designed for more demanding devices
- constant voltage for stable performance
- suitable for toys, cameras and other electronics
- reliable performance under all conditions
- shelf life up to 3 years

- chemical constitution: alkaline-special
- type: GP 11AF
- voltage: 6 V
- capacity: 38 mAh (discharge load 10 kOhm)
- dimensions: 10.22 × 16.5 mm
- weight: 4.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003776

B13021 1/-/10/720

10 21 001 111

- chemical constitution: alkaline-special
- type: GP 11AF
- voltage: 6 V
- capacity: 38 mAh (discharge load 10 kOhm)
- dimensions: 10.22 × 16.5 mm
- weight: 4.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 011467

B1302 5/-/100/1,000

10 21 001 115

- chemical constitution: alkaline-special
- type: GP 476AF (4LR44, PX28A, V4034PX)
- voltage: 6 V
- capacity: 105 mAh (discharge load 6 kOhm)
- dimensions: 13.0 × 25.2 mm
- weight: 10 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003769

B1303 1/-/10/600

10 21 047 612

- chemical constitution: alkaline-special
- type: GP 29A (A29, 32A, A32, L822)
- voltage: 9 V
- dimensions: 8.0 × 21.9 mm
- weight: 3.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003929

B13951 1/-/10/600

10 21 002 911

- chemical constitution: alkaline
- type: GP 29A
- voltage: 1.5 V
- dimensions: 8.0 × 21.9 mm
- weight: 3.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 011481

B1395 5/100/-/1,000

10 21 002 515

GP Batteries

GP Consumer batteries

GP Alkaline button

GP Ultra Plus alkaline button

- small batteries with long lifespan
- improved technology for more efficient battery usage
- suitable for watches, calculators, and other small devices
- stable performance and reliability
- wide compatibility with various devices
- shelf life up to 3 years

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003967

B13762 1/-/10/750

10 41 007 611

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 236419

B13763UP 2/-/20/1,500

10 41 007 623

EMOS A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 011597

B1376

10 41 007 615

5/-/100/1,000

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister





4 891199 015496

B3176G

10 41 007 610

10/-/250/5,000

- chemical constitution: alkaline
- type: GP 189F (AG10, LR54, LR1130, V10GA)
- voltage: 1.5 V
- capacity: 44 mAh (discharge load 3.9 kOhm)
- dimensions: 11.6 × 3.05 mm
- weight: 1.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003981

B13892

10 41 018 911

1/-/10/750

- chemical constitution: alkaline
- type: GP 189F (AG10, LR54, LR1130, V10GA)
- voltage: 1.5 V
- capacity: 44 mAh (discharge load 3.9 kOhm)
- dimensions: 11.6 × 3.05 mm
- weight: 1.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister





4 891199 015519

B1389

10 41 018 910

10/-/250/5,000

- chemical constitution: alkaline
- type: GP 192F (LR41, V3GA)
- voltage: 1.5 V
- capacity: 24 mAh (discharge load 30 kOhm)
- dimensions: 7.9 × 3.6 mm
- weight: 0.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 136542

B13921

10 41 019 211

1/-/10/750

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: GP 192F (LR41, V3GA)
- voltage: 1.5 V
- capacity: 24 mAh (discharge load 6.2 kOhm)
- dimensions: 7.9 × 3.6 mm
- weight: 0.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 011634

B13925 5/-/100/1,000

10 41 019 205

- chemical constitution: alkaline
- type: GP 192F (LR41, V3GA)
- voltage: 1.5 V
- capacity: 24 mAh (discharge load 6.2 kOhm)
- dimensions: 7.9 × 3.6 mm
- weight: 0.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister





4 891199 015533

B3192G 10/-/250/5,000

10 41 019 210

GP Ultra alkaline button

- small batteries with extended lifespan
- suitable for watches, calculators and other small devices
- reliable batteries with high output
- wide compatibility with various devices
- shelf life up to 3 years

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, blister





4 891199 231278

B30764 4/-/40/1,920

10 41 760 014

GP Alkaline button

- long lifespan in a compact design
- available alkaline button cell battery version
- suitable for watches, calculators and other small devices
- stable performance and reliability
- wide compatibility with various devices
- shelf life up to 3 years

- chemical constitution: alkaline
- type: GP 186F (AG12, LR43, LR1142, V12GA)
- voltage: 1.5 V
- capacity: 70 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 4.2 mm
- weight: 1.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003974

B13861 1/-/10/750

10 41 018 611

- chemical constitution: alkaline
- type: GP PX625A (LR9, V625U)
- voltage: 1.5 V
- capacity: 190 mAh (discharge load 600 Ohm)
- dimensions: 15.6 × 5.95 mm
- weight: 2.9 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003820

B1325 1/10/-/750

10 41 062 511

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 139222

B13763 2/-/20/1,500

10 41 007 601

SALE

- chemical constitution: alkaline
- type: GP 164F
- voltage: 1.5 V
- dimensions: 6.8 × 2.15 mm
- weight: 0.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister





4 891199 025372

B3164G 10/-/250/5,000

10 41 016 411

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: alkaline
- type: GP 177F
- voltage: 1.5 V
- dimensions: 6.8 × 2.6 mm
- weight: 0.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister





4 891199 026690

B3177G

10 41 017 711

10/-/250/5,000

- chemical constitution: alkaline
- type: GP 186F (AG12, LR43, LR1142, V12GA)
- voltage: 1.5 V
- capacity: 70 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 4.2 mm
- weight: 1.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister





4 891199 015502

B1386

10 41 018 610

10/-/250/5,000

- chemical constitution: alkaline
- type: GP 191F
- voltage: 1.5 V
- dimensions: 11.6 × 2.05 mm
- weight: 0.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister





4 891199 015526

B3191G

10 41 019 110

10/-/250/5,000

GP Batteries

GP Consumer batteries

GP Silver oxide

- compact batteries with high energy density
- stable voltage throughout the entire discharge cycle
- long service life and low self-discharge
- mercury-free, environmentally friendly
- ideal for watches, calculators and medical devices
- shelf life up to 5 years

- chemical constitution: silver oxide
- type: GP 357F (SR44, SR1154, V357)
- voltage: 1.55 V
- capacity: 165 mAh (discharge load 4.7 kOhm)
- dimensions: 11.56 × 5.4 mm
- weight: 2.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 111822

B3357F1 | 1/-/10/750

10 43 035 721 | SALE

- chemical constitution: silver oxide
- type: GP 389F (SR54, SR1130, V389)
- voltage: 1.55 V
- capacity: 79 mAh (discharge load 12 kOhm)
- dimensions: 11.56 × 3.05 mm
- weight: 1.1 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 138836

B3389F1 | 1/10/-/750

10 43 038 921 | SALE

- chemical constitution: silver oxide
- type: GP 392F (SR41, SR736, V392)
- voltage: 1.55 V
- capacity: 39 mAh (discharge load 22 kOhm)
- dimensions: 7.87 × 3.6 mm
- weight: 0.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 111846

B3392F1 | 1/10/-/750

10 43 039 221 | SALE

GP Zinc air

- high-capacity batteries with stable discharge performance
- activated after removing the protective foil
- suitable for hearing aids and other medical devices
- lightweight design for comfortable wear
- eco-friendly solution without mercury
- shelf life up to 3 years

- chemical constitution: zinc-air
- type: GP ZA10 (7005ZD, PR70)
- voltage: 1.45 V
- capacity: 90 mAh (discharge load 1.5 kOhm)
- dimensions: 5.8 × 3.6 mm
- weight: 0.3 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister



4 043752 445985

B35106 6/60/300/3,000

10 44 001 026

- chemical constitution: zinc-air
- type: GP ZA13 (7000ZD, PR48)
- voltage: 1.45 V
- capacity: 290 mAh (discharge load 625 Ohm)
- dimensions: 7.9 × 5.4 mm
- weight: 0.8 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister



4 043752 445961

B35136 6/60/300/3,000

10 44 001 306 NEW

- chemical constitution: zinc-air
- type: GP ZA312 (7002ZD, PR41)
- voltage: 1.45 V
- capacity: 170 mAh (discharge load 1.0 kOhm)
- dimensions: 7.9 × 3.6 mm
- weight: 0.5 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister



4 043752 445978

B35126 6/60/300/3,000

10 44 031 206

- chemical constitution: zinc-air
- type: GP ZA675 (7003ZD, PR44)
- voltage: 1.45 V
- capacity: 620 mAh (discharge load 300 Ohm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.8 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister



4 043752 445954

B35756 6/60/300/3,000

10 44 067 506

GP Batteries

GP Consumer batteries

GP Rechargeable

GP ReCyko Pro

- professional rechargeable batteries with long lifespan
- high capacity and power for demanding devices
- low self-discharge, ready to use right after purchase
- ideal for cameras, external flashes, and other powerful devices
- eco-friendly due to reusability
- shelf life up to 10 years

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 800 mAh
- number of charging cycles: more than 1 500
- dimensions: 10.5 × 44.5 mm
- weight: 14 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 212758

B26184 4/-/40/400

10 32 124 080

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 800 mAh
- number of charging cycles: more than 1 500
- dimensions: 10.5 × 44.5 mm
- weight: 14 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 222344

B2618V 6/-/60/720

10 32 126 080

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 000 mAh
- number of charging cycles: more than 1 500
- dimensions: 14.5 × 50.5 mm
- weight: 30 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 212734

B26204 4/-/40/400

10 32 224 200

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 000 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 30 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 212765

B2629 4/-/40/400

10 32 224 201

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 000 mAh
- number of charging cycles: more than 1 500
- dimensions: 14.5 × 50.5 mm
- weight: 30 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 222337

B2620V 6/-/60/360

10 32 226 200

GP ReCyko

- universal rechargeable batteries for everyday use
- available in various capacities and packs
- low self-discharge, ready to use right after purchase
- suitable for remote controls, toys, and other household devices
- eco-friendly due to reusability
- shelf life up to 10 years

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 650 mAh
- number of charging cycles: more than 1 000
- dimensions: 10.5 × 44.5 mm
- weight: 12 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 212666

B25162 2/-/20/200

10 32 122 062

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 950 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 212628

B25112 2/-/20/200

10 32 122 090

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 850 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 14.5 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 212659

B25184 4/-/40/400

10 32 124 081

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 950 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 212635

B25114 4/-/40/400

10 32 124 090

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 850 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 14.5 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 234699

B25186 6/-/72/288

10 32 126 082

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 950 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 222351

B2511V 6/-/60/720

10 32 126 090

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 1 300 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 212604

B25232 2/-/20/200

10 32 222 131

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 27 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





500 charging cycles

4 891199 212581

B25212 2/-/20/200

10 32 222 211

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 600 mAh
- number of charging cycles: more than 300
- dimensions: 14.5 × 50.5 mm
- weight: 31 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





300 charging cycles

4 891199 212567

B25272 2/-/20/200

10 32 222 260

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 27 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





500 charging cycles

4 891199 212598

B25214 4/-/40/400

10 32 224 210

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 600 mAh
- number of charging cycles: up to 300
- dimensions: 14.5 × 50.5 mm
- weight: 31 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





300 charging cycles

4 891199 212574

B25274 4/-/40/400

10 32 224 260

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 27 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





500 charging cycles

4 891199 234675

B25216 6/-/72/288

10 32 226 214

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 27 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





500 charging cycles

4 891199 222375

B2521V

10 32 226 212

6/-/60/360

SALE

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 600 mAh
- number of charging cycles: up to 300
- dimensions: 14.5 × 50.5 mm
- weight: 31 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





300 charging cycles

4 891199 222368

B2527V

10 32 226 260

6/-/60/360

- chemical constitution: NiMH
- type: HR14 (C battery)
- voltage: 1.2 V
- capacity: 3 000 mAh
- number of charging cycles: more than 1 000
- dimensions: 26.2 × 50.0 mm
- weight: 60 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





1000 charging cycles

4 891199 212697

B2533

10 32 322 301

2/-/12/120

- chemical constitution: NiMH
- type: HR20 (D battery)
- voltage: 1.2 V
- capacity: 3 000 mAh
- number of charging cycles: more than 1 000
- dimensions: 34.2 × 61.5 mm
- weight: 70 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





1000 charging cycles

4 891199 212703

B2543

10 32 422 300

2/-/12/72

GP Recharge

- reliable rechargeable batteries for regular use
- available in various capacities
- low self-discharge, ready to use right after purchase
- suitable for remote controls, toys, and other household devices
- eco-friendly due to reusability
- shelf life up to 7 years

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 800 mAh
- number of charging cycles: more than 200
- dimensions: 10.5 × 44.5 mm
- weight: 12 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 234682

B27186 6/-/72/288

10 32 126 081

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 200
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 234668

B27216 6/-/72/288

10 32 226 213

GP Rechargeable 9V

- rechargeable 9V batteries for everyday use
- low self-discharge, ready to use
- suitable for smoke detectors, measuring and security devices
- eco-friendly and cost-effective solution thanks to repeated use
- reliable performance with repeated charging

- chemical constitution: NiMH
- type: 6HR61 9 V (1604)
- voltage: 8.4 V
- capacity: 200 mAh
- number of charging cycles: more than 500
- dimensions: 26.5 × 15.7 × 48.5 mm
- weight: 42.5 g
- operating temperature: -20 °C to +50 °C
- packaging: 1 pc, small paper box





4 891199 212710

B2552 1/-/10/100

10 32 521 021

Raver Batteries

Raver Lithium cylindrical

RAVER lithium extreme

- reliable lithium batteries for demanding conditions
- suitable for devices with high and variable power consumption
- stable performance even in extreme temperatures
- ideal for professional and outdoor use
- shelf life up to 10 years

- chemical constitution: lithium
- type: FR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 7.2 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister





8 595025 364357

B7811 2/-/28/280

13 21 112 000

- chemical constitution: lithium
- type: FR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 15.5 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister





8 595025 364388

B7821 2/-/20/200

13 21 212 000

Raver Batteries

Raver Alkaline

Raver Ultra alkaline cylindrical

- powerful alkaline batteries for everyday use
- designed for devices with longer operation and low consumption
- reliable solution for home, office, and leisure
- wide usability in everyday electronics
- resistant to various temperature conditions
- shelf life up to 7 years

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





8 595025 345899

B7911 4/-/40/320

13 20 114 000

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 8 pcs, shrink





8 595025 348630

B79118 8/-/96/960

13 20 118 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23,8 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





8 595025 345882

B7921 4/-/40/320

13 20 214 000

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23,8 g
- operating temperature: -20 °C to +60 °C
- packaging: 8 pcs, shrink



8 595025 348609

B79218
13 20 218 000
8/-/96/960

Raver Batteries

Raver Rechargeable

RAVER Rechargeable for solar lamps

- reusable batteries environmentally friendly
- ideal choice for low-voltage devices
- cost-effective solution with long-term benefits
- compatible with standard chargers
- reliable performance in various conditions
- shelf life approximately 7 years

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 400 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 9 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, blister



8 592920 007808

B7414
13 32 112 040
2/-/32/384

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 600 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, blister



8 592920 007839

B7426
13 32 212 030
2/-/24/288

Raver Batteries

Raver Other batteries

Raver Lithium button

- compact lithium batteries with long endurance
- suitable for small devices with constant consumption
- stable voltage throughout the entire lifespan
- ideal for watches, medical equipment, and security devices
- work reliably even in demanding temperature conditions
- shelf life up to 10 years

- chemical constitution: lithium
- type: CR2032
- voltage: 3 V
- capacity: 220 mAh (discharge load 15 kOhm)
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -10 °C to +60 °C
- packaging: 5 pcs, blister





8 592920 018705

B7332

13 26 023 205

5/-/150/1,800

Batteries EMOS, lead acid battery

Lead acid batteries

- maintenance-free, valve-controlled industrial lead accumulators
- for low-cost powering of devices
- hermetically sealed lead AGM accumulators
- wide range of uses – fire alarms, communication devices, UPS
- optimal service life 5 years

B9651 1/-/-/20

12 01 000 500

8 595025 340818



voltage: 6 V ▪ capacity: 1.3 Ah ▪ weight: 0.3 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 97 × 24 × 51 mm ▪ packaging: 1 pc

B9641 1/-/-/16

12 01 000 100

8 595025 318732



for lanterns: 3810 (P2301), 3810 LED (P2304), 3810 LED EXPERT (P2305), 3810 10W + COB (P2308) ▪ chemical constitution: Pb ▪ voltage: 6 V ▪ capacity: 4 Ah ▪ dimensions: 70 × 47 × 101 mm ▪ packaging: 1 pc

B9659 1/-/-/10

12 01 000 520

8 595025 353474



voltage: 6 V ▪ capacity: 7 Ah ▪ weight: 1 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 34 × 94 mm ▪ packaging: 1 pc

B9682 1/-/-/6

12 01 003 500

8 592920 005668



voltage: 6 V ▪ capacity: 12 Ah ▪ weight: 1.8 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 51 × 94 mm ▪ packaging: 1 pc

B9652 1/-/-/20

12 01 000 600

8 595025 340825



voltage: 12 V ▪ capacity: 1.3 Ah ▪ weight: 0.5 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 97 × 45 × 53 mm ▪ packaging: 1 pc

B9672 1/-/-/12

12 01 002 600

8 592920 004159



voltage: 12 V ▪ capacity: 2.2 Ah ▪ weight: 0.95 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 178 × 35 × 61 mm ▪ packaging: 1 pc

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

B9653 1/-/-/8

12 01 000 700

8 595025 340832



voltage: 12 V ▪ capacity: 4.5 Ah ▪ weight: 1.46 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 91 × 71 × 105 mm ▪ packaging: 1 pc

B9679 1/-/-/6

12 01 003 300

8 592920 004890



voltage: 12 V ▪ capacity: 5 Ah ▪ weight: 1,65 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 91 × 71 × 105 mm ▪ packaging: 1 pc

B9691 1/-/-/5

12 01 004 300

8 592920 018187



voltage: 12 V ▪ capacity: 7 Ah ▪ weight: 2.05 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9654 1/-/-/5

12 01 000 800

8 595025 340849



voltage: 12 V ▪ capacity: 7.2 Ah ▪ weight: 2.2 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9674 1/-/-/5

12 01 002 800

8 592920 004449



voltage: 12 V ▪ capacity: 7.2 Ah ▪ weight: 2.2 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9675 1/-/-/4

12 01 002 900

8 592920 004463



voltage: 12 V ▪ capacity: 9 Ah ▪ weight: 2.42 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9656 1/-/-/3

12 01 000 850

8 595025 343529



voltage: 12 V ▪ capacity: 12 Ah ▪ weight: 3.3 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 98 × 96 mm ▪ packaging: 1 pc

B9656V 1/-/-/2

12 01 004 800

8 592920 091838



voltage: 12 V ▪ capacity: 15 Ah/20 hrs (14 Ah/10 hrs, 12 Ah/2 hrs) ▪ weight: 4.25 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 4 years for cyclic operation (approx. 1 200 cycles for 30 % D.O.D = discharge depth) ▪ dimensions: 150 × 100 × 102 mm ▪ packaging: 1 pc

B9655 1/-/-/2

12 01 000 900

8 595025 340856



voltage: 12 V ▪ capacity: 18 Ah ▪ weight: 4.88 kg ▪ terminal: 12 × 12 × 2 mm ▪ optimal lifetime: 5 years ▪ dimensions: 181 × 77 × 167 mm ▪ packaging: 1 pc

B9683 1/-/-/1

12 01 003 600

8 592920 006399



voltage: 12 V ▪ capacity: 26 Ah ▪ weight: 8.05 kg ▪ terminal: 14 × 12 × 2 mm ▪ optimal lifetime: 5 years ▪ dimensions: 175 × 165 × 125 mm ▪ packaging: 1 pc

www.emos.eu

Order Code
Item Number

Packaging
Type

B9684 1/-/-/1

12 01 003 700

8 592920 006412



voltage: 12 V ▪ capacity: 40 Ah ▪ weight: 13.05 kg ▪ terminal: T1 – M6 ▪ optimal lifetime: 5 years ▪ dimensions: 196 × 166 × 175 mm ▪ packaging: 1 pc

B9685 1/-/-/1

12 01 003 800

8 592920 006436



voltage: 12 V ▪ capacity: 65 Ah ▪ weight: 20.65 kg ▪ terminal: T2 – M8 ▪ optimal lifetime: 5 years ▪ dimensions: 350 × 166 × 175 mm ▪ packaging: 1 pc

Battery chargers, power banks, power supplies

Reliable power supply for everyday use



This category represents a stable and promising range within the electronics sector. It responds to the growing need for affordable, fast and safe power supply for electronics at home, in the office and on the go.

The portfolio includes smart chargers for standard and specialised batteries, compact power banks for mobile devices, and a wide range of mains power supplies for electronics. Selected models offer fast charging, multiple outputs, protection against overload, overvoltage and short circuits, or advanced charging process control functions.

The wide range of power ratings, designs and price points allows for precise targeting of different customer segments, price levels and performance requirements.

OUR TIP

Making Life Easy

Battery chargers, powerbanks, USB chargers



Battery chargers

Charge 10

- thanks to the fast charging technology, it reliably charges the batteries in just 10 minutes
- will please with overheating protection or ECO mode for gentle charging of NiMH batteries
- it also has fully automatic intelligent charging and silent operation
- the charger includes 4 environmentally friendly AA batteries that last more than 700 charging cycles

- type of charger: intelligent
- charger design: separated AC cord
- power source: 100–240 V AC
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko Charge
- charging time of the enclosed cells: 00:10
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 10 000 mA
- charging current for AAA: 1 500 mA
- charging time AA 2 700 mAh: 0:30
- charging time AAA 1 000 mAh: 0:45
- packaging: 1 pc, small paper box







4 891199 204616

B56499	1/-/6/12
16 04 849 120	SALE

GP Battery chargers

- modern compact design
- USB power supply for convenient use anywhere
- fast and intelligent charging
- USB cable included
- selected models include rechargeable batteries

auto on/off

smart diagnostics

charge everywhere

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 2
- type of cells inside the package: AA ReCyko 2 100
- charging time of the enclosed cells: 8:00
- number of charging channels: 1
- number of batteries charged: 2

- charging current for AA: 300 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 10:00
- charging time AAA 1 000 mAh: 4:00
- packaging: 1 pc, small paper box





8 hrs charging time · ready to use · 1 year storage · 500 charging cycles

4 891199 213199

B50224 1/-/-/12

16 04 822 110

SALE

- type of charger: intelligent
- charger design: USB-C
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- special features: PD charging compatible
- number of cells inside the package: 4
- type of cells inside the package: AA Recharge 2100,
- charging time of the enclosed cells: 4:00
- number of charging channels: 4

- number of batteries charged: 1 to 4
- charging current for AA: 1 400 mA/400 mA × 4
- charging current for AAA: 1 400 mA/400 mA × 4
- charging time AA 2 700 mAh: 7:30
- charging time AAA 1 000 mAh: 3:30
- packaging: 1 pc, small paper box





4 hrs charging time · ready to use · 1 year storage · 200 charging cycles

4 891199 234996

B50439 1/-/6/12

16 04 842 300

NEW

- type of charger: intelligent
- charger design: USB-C
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- special features: PD charging compatible
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko 2 100
- charging time of the enclosed cells: 6:00
- number of charging channels: 4

- number of batteries charged: 1 to 4
- charging current for AA: 1 400 mA/400 mA × 4
- charging current for AAA: 1 400 mA/400 mA × 4
- charging time AA 2 700 mAh: 7:30
- charging time AAA 1 000 mAh: 3:30
- packaging: 1 pc, small paper box





6 hrs charging time · ready to use · 1 year storage · 500 charging cycles

4 891199 235146

B50434 1/-/6/12

16 04 842 301

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko 2 100
- charging time of the enclosed cells: 3:00/6:00
- number of charging channels: 2
- number of batteries charged: 2 or 4

- charging current for AA: 770 mA/380 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 4:00 - 8:00
- charging time AAA 1 000 mAh: 2:30 - 3:30
- packaging: 1 pc, small paper box





6 hrs charging time · ready to use · 1 year storage · 500 charging cycles

4 891199 213267

B50444D 1/-/6/12

16 04 844 112

SALE

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- special features: capacity check, docking station
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko 2 600
- charging time of the enclosed cells: 5:30
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 100–550 mA
- charging current for AAA: 730–370 mA
- charging time AA 2 700 mAh: 5:30
- charging time AAA 1 000 mAh: 4:15
- packaging: 1 pc, small paper box





8 hrs charging time | ready to use | 10 year storage

4 891199 195266

B53457P | 1/-/6/12

16 04 845 114 | SALE

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko Pro
- charging time of the enclosed cells: 2:45 - 5:30
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 100–550 mA
- charging current for AAA: 730–370 mA
- charging time AA 2 700 mAh: 2:45 - 5:30
- charging time AAA 1 000 mAh: 1:30 - 3:30
- packaging: 1 pc, small paper box





6 hrs charging time | ready to use | 10 year storage

4 891199 213281

B50457 | 1/-/6/12

16 04 845 210 | SALE

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/2 A
- size of the charged cells: AAA, AA
- special features: capacity check, docking station
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko Pro
- charging time of the enclosed cells: 1:20 - 2:40
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 730 mA/ 870 mA
- charging current for AAA: 700 mA/350 mA
- charging time AA 2 700 mAh: 1:45/3:30
- charging time AAA 1 000 mAh: 1:30 - 3:15
- packaging: 1 pc, small paper box





2,5 hrs charging time | ready to use | 10 year storage

4 891199 213328

B50460D | 1/-/6/12

16 04 846 114 | SALE

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 8
- type of cells inside the package: AA ReCyko 2 100, A
- charging time of the enclosed cells: 9:00
- number of charging channels: 4
- number of batteries charged: 2, 4, 6 or 8
- charging current for AA: 250 mA
- charging current for AAA: 250 mA
- charging time AA 2 700 mAh: 10:00
- charging time AAA 1 000 mAh: 5:00
- packaging: 1 pc, small paper box





10 min charging time | ready to use | 10 year storage

4 891199 213236

B50829 | 1/-/-/12

16 04 882 110 | SALE

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/2 A
- size of the charged cells: AAA, AA, C, D, 9 V
- number of charging channels: 4
- number of batteries charged: 2 or 4
- charging current for AA: 370 mA
- charging current for AAA: 290 mA
- charging current for C: 550 mA
- charging current for D: 550 mA
- charging current for 9 V: 40–20 mA
- charging time AA 2 700 mAh: 8:00
- charging time AAA 1 000 mAh: 4:00
- packaging: 1 pc, small paper box





10 min charging time | ready to use | 10 year storage

4 891199 213274

B50630 | 1/-/-/6

16 04 863 101 | SALE

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- type of charger: intelligent
- charger design: USB-C
- power source: USB 5 V/2 A
- size of the charged cells: AAA, AA
- special features: PD charging compatible, Flexi Char
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1200 mA (4 x AA)
- charging current for AAA: 800 mA (4x AAA)
- charging time AA 2 700 mAh: 2:45
- charging time AAA 1 000 mAh: 1:30
- packaging: 1 pc, small paper box




battery health care | capacity check | individual charging

4 891199 235160

B534530 | 16 04 845 300 | 1/-/6/12 | NEW

EMOS Battery chargers

- for carefree charging of consumer NiMH batteries
- automatic start and end of charging
- charging batteries individually or simultaneously
- smart diagnostics and management of the charging process
- high final level of charge of the batteries
- other eco-friendly and safety features
- colour LEDs indicate the state of charge

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/2 A
- size of the charged cells: 10440 – 26650, AAA, AA, C
- special features: capacity check
- number of charging channels: 2
- number of batteries charged: 1 or 2
- charging current for AA: 1 000 mA
- charging current for AAA: 1 000 mA
- charging current for C: 1 000 mA
- charging time AA 2 700 mAh: 3:00
- charging time AAA 1 000 mAh: 1:15
- packaging: 1 pc, small paper box




2 hrs | 1 000 mA | Battery health care | Li-ion, LiFePO4, NiMH | Individual charging | Worry-free charging | Capacity check | Cool power

8 592920 092361

N9221 | 16 03 026 000 | 1/-/-/60

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 300 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 10:00
- charging time AAA 1 000 mAh: 4:00
- packaging: 1 pc, small paper box




7 hrs | 300 mA | AA, AAA | Individual charging | Worry-free charging

8 592920 109991

N9321 | 16 03 027 000 | 1/-/-/60

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/2 A
- size of the charged cells: AAA, AA, C, D, 9 V
- number of charging channels: 7
- number of batteries charged: 1 to 6
- charging current for AA: 500 mA
- charging current for AAA: 500 mA
- charging current for C: 500 mA
- charging current for D: 500 mA
- charging current for 9 V: 30 mA
- charging time AA 2 700 mAh: 6:30
- charging time AAA 1 000 mAh: 2:30
- packaging: 1 pc, small paper box




4 hrs | 500 mA | AA, AAA, C, D, 9 V | Individual charging | Worry-free charging

8 592920 109984

N9361 | 16 03 030 000 | 1/-/-/30

Powerbanks

GP Powerbanks

- advanced safety features
- all models are able to charge more devices simultaneously
- all models are capable of Light Load charging (for smart-watches, headphones)
- all models are equipped with LED Display or LED indication
- passthrough function, auto On/Off

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 22.5 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 6.5 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-C, 1× USB-A
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- passthrough
- material: ABS plastic
- colour: grey
- weight: 430 g
- dimensions: 146 × 68 × 29 mm





4 891199 224287

B6320GY 1/-/2/20

16 11 632 000

- battery capacity: 5 000 mAh/18.5 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 12 W
- type of input interface: 1× USB-C
- charging time: 3 hours
- max.output power: 12 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- material: ABS plastic
- colour: light grey
- weight: 115 g
- dimensions: 96 × 63 × 14 mm





4 891199 230523

B6405GY 1/-/2/20

16 11 640 500

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 15 W
- type of input interface: 1× USB-C
- charging time: 5,5 hours
- max.output power: 15 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- material: ABS plastic
- colour: beige
- weight: 226 g
- dimensions: 139 × 68 × 16 mm





4 891199 230530

B6410BE 1/-/2/20

16 11 641 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 15 W
- type of input interface: 1× USB-C
- charging time: 5,5 hours
- max.output power: 15 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- material: ABS plastic
- colour: blue
- weight: 226 g
- dimensions: 139 × 68 × 16 mm





4 891199 230547

B6410BL
16 11 641 001

1/-/2/20

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 15 W
- type of input interface: 1× USB-C
- charging time: 10 hours
- max.output power: 15 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 413 g
- dimensions: 138 × 68 × 29 mm





4 891199 230554

B6420B
16 11 642 000

1/-/2/20

EMOS Powerbanks

- all models are compatible with USB-C
- long battery life and reliable performance
- advanced safety features
- selected models support fast charging QC 3.0 and PD 20 W
- practical passthrough function, automatic power on and off
- specific models offer wireless charging
- USB cable included



- battery capacity: 5 000 mAh/19,25 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 120 g
- dimensions: 103 × 67 × 12 mm







8 592920 131695

B0545B
16 13 054 500

1/-/-/28

SALE

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W + SCP 22.5 W + Dash + War
- max.input power: 18 W
- type of input interface: 1× micro USB, 1× USB-C
- charging time: 4 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C, data

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 233 g
- dimensions: 144 × 68 × 16 mm







8 592920 124772

B0531B
16 13 053 100

1/-/-/28

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W + SCP 22.5 W + Dash + War
- max.input power: 18 W
- type of input interface: 1× micro USB, 1× USB-C
- charging time: 7 hours (with QC)
- max.output power: 22.5 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C, data
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 409 g
- dimensions: 144 × 68 × 28 mm




22.5 W | 20 000 mAh | 1× USB-C output | 2× USB-A output | LED display | Anti-slip coating | fast charge | LED display

8 592920 124796

B0532B 1/-/-/12

16 13 053 200

- battery capacity: 10 000 mAh/38.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: blue
- weight: 184 g
- dimensions: 99 × 65 × 17 mm




20 W | 10 000 mAh | 1× USB-C | LED indication | fast charge | Qi wireless charging | MagSafe Compatible

8 592920 136836

B0551BL 1/-/-/28

16 13 055 100

- battery capacity: 10 000 mAh/38.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: grey
- weight: 184 g
- dimensions: 99 × 65 × 17 mm




20 W | 10 000 mAh | 1× USB-C | LED indication | fast charge | Qi wireless charging | MagSafe Compatible

8 592920 136874

B0551GY 1/-/-/28

16 13 055 101

- battery capacity: 10 000 mAh/38.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: salmon
- weight: 184 g
- dimensions: 99 × 65 × 17 mm




20 W | 10 000 mAh | 1× USB-C | LED indication | fast charge | Qi wireless charging | MagSafe Compatible

8 592920 138281

B0551S 1/-/-/28

16 13 055 102

SALE

- battery capacity: 10 000 mAh/38.7 Wh
- battery type: Li-Po 3.87 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: rosegold
- weight: 200 g
- dimensions: 101 × 65 × 17 mm




20 W | 10 000 mAh | 1× USB-C | LED indication | fast charge | Qi wireless charging | MagSafe Compatible

8 592920 145616

B0552RG 1/-/-/28

16 13 055 200

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- battery capacity: 10 000 mAh/38.7 Wh
- battery type: Li-Po 3.87 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: green
- weight: 200 g
- dimensions: 101 × 65 × 17 mm




20 W | 10 000 mAh | 1× USB-C | LED indication | fast charge | Qi wireless charging | MagSafe Compatible

8 592920 145630

B0552AG 1/-/-/28

16 13 055 201

- battery capacity: 5 000 mAh/19,25 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: grey
- weight: 121 g
- dimensions: 83 × 60 × 12.4 mm




20 W | 5 000 mAh | 1× USB-C | LED indication | fast charge | Qi wireless charging | MagSafe Compatible

8 592920 136850

B0555GY 1/-/-/28

16 13 055 501

- battery capacity: 5 000 mAh/19,25 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: blue
- weight: 121 g
- dimensions: 83 × 60 × 12.4 mm




20 W | 5 000 mAh | 1× USB-C | LED indication | fast charge | Qi wireless charging | MagSafe Compatible

8 592920 138311

B0555BL 1/-/-/28

16 13 055 502

SALE

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 65 W
- max.input power: 65 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 65 W
- type of output interface: 1× USB-A, 1× USB-C
- cable included: USB□C/USB□C, data
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 334 g
- dimensions: 100 × 64 × 32 mm




65 W | 20 000 mAh | 1× USB-A | 1× USB-C | LED display | fast charge | LED display

8 592920 140673

B0560B 1/-/-/24

16 13 056 000

- battery capacity: 27 000 mAh
- battery type: Li-Ion 3.7 V
- fast charging: PD 100 W + PD 27 W
- max.input power: 100 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 100 W
- type of output interface: 2× USB-C, 1× USB-A
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminium
- colour: black
- weight: 580 g
- dimensions: 190 × 74 × 27 mm




100 W | 27 000 mAh | 1× USB-A | 2× USB-C | LED display | fast charge | LED display

8 592920 140703

B0561B 1/-/-/12

16 13 056 100

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 3.5 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 227 g
- dimensions: 150 × 67 × 16 mm





22.5 W | 10 000 mAh | 2× USB-A output | 1× USB-C output | LED indication | fast charge

8 592920 148945

B0571B 1/-/-/28

16 13 057 100

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 6.5 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 412 g
- dimensions: 150 × 68 × 29 mm





22.5 W | 20 000 mAh | 2× USB-A output | 1× USB-C output | LED indication | fast charge

8 592920 148969

B0572B 1/-/-/12

16 13 057 200

USB chargers

- wide range of models, including advanced GaN technology and cost-effective BASIC adapters
- GaN technology enables faster and more powerful charging while maintaining compact dimensions
- USB ports for simultaneous charging of multiple devices
- most models support PD fast charging protocol
- intelligent functions for fast charging and protection of connected devices

---

max. output 1× USB: C: 5 V/3 A – 9 V/2,22 A – 12 V/1,67 A (20 W) ▪ max. output total: 20 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: fast ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ dimensions: 34 × 75 × 23 mm ▪ packaging: 1 pc, small paper box





GaN technology | 3× Safety protection | Tablet | Smartphone | 1× USB-C PD | fast charge

8 592920 140154

V01G20 1/-/10/40

17 04 023 000

---

max. output 1× USB: A: 5 V/3 A – 9 V/2 A – 12 V/1,5 A (18 W); C: 5 V/3 A – 9 V/2,22 A – 12 V/1,67 A (20 W) ▪ max. output total: 20 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: fast ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ dimensions: 34 × 75 × 23 mm ▪ packaging: 1 pc, small paper box





GaN technology | 3× Safety protection | Tablet | Smartphone | 1× USB-A QC | 1× USB-C PD | fast charge

8 592920 140147

V02G20 1/-/10/40

17 04 022 900

max. output 1× USB: C1/C2: 5 V/3 A – 9 V/3 A – 12 V/2,9 A – 15 V/2,33 A – 20 V/1,75 A (35 W) ▪ max. output total: 35 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: fast ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ dimensions: 34 × 75 × 23 mm ▪ packaging: 1 pc, small paper box






8 592920 140093

V03G35 1/-/10/40
17 04 022 800

---

max. output 1× USB: A: 5 V/3 A – 9 V/2 A – 12 V/1,5 A (18 W); C: 5 V/3 A – 9 V/3 A – 12 V/3 A – 15 V/3 A – 20 V/2,25 A (45 W) ▪ max. output total: 45 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: fast ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet, notebook ▪ dimensions: 34 × 84 × 23 mm ▪ packaging: 1 pc, small paper box






8 592920 140185

V04G45 1/-/10/40
17 04 023 100

---

max. output 1× USB: A: 5 V/3 A - 9 V/3 A - 12 V/3 A - 20 V/3 A (60 W); C1/C2: 5 V/3 A – 9 V/3 A – 12 V/3 A – 15 V/3 A – 20 V/3,25 A (65 W) ▪ max. output total: 65 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: fast ▪ number of USB outputs: 3 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet, notebook ▪ dimensions: 34 × 94 × 23 mm ▪ packaging: 1 pc, small paper box






8 592920 140215

V05G65 1/-/10/40
17 04 023 200

---

max. output 1× USB: A: 5 V/3 A – 9 V/3 A – 10 V/2,25 A – 12 V/2,5 A – 20 V/1,5 A (30 W); C1/C2/C3: 5 V/3 A – 9 V/3 A – 12 V/3 A – 15 V/3 A – 20 V/5 A – 21 V/5 A (105 W) ▪ max. output total: 120 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: fast ▪ number of USB outputs: 4 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet, notebook ▪ dimensions: 57 × 107 × 24 mm ▪ packaging: 1 pc, small paper box






8 592920 140246

V06G120 1/-/10/40
17 04 023 300

---

max. output 1× USB: A: 5 V/2 A (10 W) ▪ max. output total: 10 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: basic ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone ▪ dimensions: 35 × 72 × 22 mm ▪ packaging: 1 pc, small paper box






8 592920 140031

V01B10 1/-/10/40
17 04 022 600

max. output 1× USB: A: 5 V/3 A (15 W); C: 5 V/3 A (15 W) ▪ max. output total: 15 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: basic ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ dimensions: 35 × 72 × 22 mm ▪ packaging: 1 pc, small paper box







8 592920 140062

V02B15 1/-/10/40

17 04 022 700

---

max. output 1× USB: A: 5 V/3 A – 9 V/3 A – 12 V/2,25 A – 20 V/1,35 A (27 W); C: 5 V/3 A – 9 V/3 A – 12 V/3 A – 15 V/3 A – 20 V/3,25 A (65 W) ▪ max. output total: 65 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: fast ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet, notebook ▪ dimensions: 46 × 84 × 31 mm ▪ packaging: 1 pc, small paper box







8 592920 159538

V1TG65 1/-/10/60

17 04 023 500

NEW

---

max. output 1× USB: A: 5 V/3 A – 9 V/2 A – 12 V/1,5 A (18 W); C: 5 V/3 A – 9 V/3 A – 12 V/2,5 A (30 W) ▪ max. output total: 48 W ▪ input voltage: 12–24 V DC ▪ charging: fast ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ LED indicators ▪ dimensions: 28 × 36 × 65 mm ▪ packaging: 1 pc, box







8 592920 159521

V02C48 1/-/10/60

17 04 023 400

NEW

Universal adaptors

- EMOS adapters come with a set of replaceable connectors
- SMPS suitable for light-current devices (torches, antennas)

---

input voltage: 100–240 V~ 50/60 Hz ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 600 mA ▪ size of the connector: B 3,5/15; C 3,0x1,0/10; D 5,0x2,1/12; G 5,5x2,5/13; H 3,5x1,35/11; I 4x 1,7/12; S 2,35x0,75/8,7 ▪ power supply type: cable + set of DC connectors ▪ dimensions: 37 × 66 × 67 mm ▪ packaging: 1 pc, box







8 592920 154236

N3110N 1/-/10/40

17 03 060 022

max. output 1× USB: 5 V/2.0 A/10 W ▪ max. output total: 5 V/2.0 A/10 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 1 000 mA ▪ size of the connector: B 3,5/15; C 3,0x1,0/10; D 5,0x2,1/12; G 5,5x2,5/13; H 3,5x1,35/11; I 4x 1,7/12; S 2,35x0,75/8,7 ▪ power supply type: cable + set of DC connectors + USB out ▪ dimensions: 50 × 84 × 71 mm ▪ packaging: 1 pc, box





1 000 mA max. | OUT 3–12 V | 1× USB-A | 1.8 m cable

8 592920 154243

N3111N 1/-/10/40

17 03 100 022

---

max. output 1× USB: 5 V/2.0 A/10 W ▪ max. output total: 5 V/2.0 A/10 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 1 500 mA ▪ size of the connector: B 3,5/15; C 3,0x1,0/10; D 5,0x2,1/12; G 5,5x2,5/13; H 3,5x1,35/11; I 4x 1,7/12; S 2,35x0,75/8,7 ▪ power supply type: cable + set of DC connectors + USB out ▪ dimensions: 50 × 84 × 71 mm ▪ packaging: 1 pc, box





1 500 mA max. | OUT 3–12 V | 1× USB-A | 1.8 m cable

8 592920 154250

N3112N 1/-/10/40

17 03 150 022

---

max. output 1× USB: 5 V/2.0 A/10 W ▪ max. output total: 5 V/2.0 A/10 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 2 250 mA ▪ size of the connector: B 3,5/15; C 3,0x1,0/10; D 5,0x2,1/12; G 5,5x2,5/13; H 3,5x1,35/11; I 4x 1,7/12; S 2,35x0,75/8,7 ▪ power supply type: cable + set of DC connectors + USB out ▪ dimensions: 50 × 84 × 71 mm ▪ packaging: 1 pc, box





2 250 mA max. | OUT 3–12 V | 1× USB-A | 1.8 m cable

8 592920 154267

N3113N 1/-/10/40

17 03 225 022

Car battery chargers, testers

- for charging car batteries and other accumulators
- with voltage of 6 or 12 V and capacity of 1.2–120 Ah
- diagnoses type of connected battery, auto-selects programme
- adapts charging speed and intensity to ambient temperature
- non-stop connection extends battery life in rarely-used cars
- restores slightly damaged accumulators to original condition
- with short-circuit and reversed polarity protection

---

designed for: cars, motorcycles, backup batteries, lead acid battery WET (acid), MF (Maintenance Free), VRLA, AGM and GEL ▪ charging: 6 V (1.2 Ah–14 Ah), 12 V (1.2 Ah–120 Ah) ▪ charging cable: 1.8 m is terminated by clips ▪ disfultation mode ▪ sustaining mode ▪ cold weather program ▪ protection against short circuit and reverse polarity ▪ entrance: 220–240 V AC/50 Hz/600 mA ▪ IP rating: IP65 ▪ packaging: 1 pc, box





IP65 | 6/12 V 4 A max. | 1.8 m | 1.2–120 Ah | 1.2–120 Ah | Reverse polarity protection

AGM GEL

8 592920 017395

N1014 1/-/-/12

16 06 025 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

designed for: cars, motorbikes, backup accumulator, SLA battery WET (acid), MF (maintenance-free), VRLA, AGM + GEL and 12.8 V LiFePO4 ▪ charging: 6 V (1.2 Ah–30 Ah), 12 V (1.2 Ah–30 Ah); 12.8 V LiFePO4 (2 Ah–15 Ah) ▪ charging cable: 1.8 m is terminated by clips ▪ disfultation mode ▪ sustaining mode ▪ protection against short circuit and reverse polarity ▪ entrance: 220–240 V AC/50 Hz/300 mA ▪ IP rating: IP65 (charger cover) ▪ packaging: 1 pc, box









8 592920 049686

N1015

16 08 000 001

1/-/-/20

EMOS/GP LED headlamps

A staple in the outdoor and work lighting segment

LED headlamps represent an attractive and long-standing product range in the fields of outdoor equipment, the hobby sector and work lamps.

Selected models are fitted with high-performance CREE LED chips offering high luminous flux and a beam range of up to 200 m. They offer multiple lighting modes – from energy-saving modes for maximum battery life to high-performance modes for demanding applications.

The portfolio includes both battery-powered and rechargeable variants, covering a range of price points and customer needs.



OUR TIP

Making Life Easy

Portable Lighting



GP

Flashlights

GP Discovery

- quality all-metal GP torches for daily use
- powerful yet efficient LED chips (CREE LED in some models)
- compatible with alkaline and rechargeable batteries
- anti-scratch surface finish
- water-resistance up to IPX7 (CR41 usable briefly underwater)

- source of light: CREE SMD LED
- maximal light output: 650 lm
- maximal beam distance: 135 m
- number of lighting modes: 4
- runtime: 5.5–40 hrs
- focus
- impact resistance: 1 m
- waterproof: IPX7
- rechargeable

- battery: Li-Ion
- battery type: 18650/3,7 V/2 550 mAh
- batteries included
- recharge time: 3 hrs
- power connector type: micro USB
- features: textile loop
- dimensions: 33 × 136 mm
- weight: 179 g
- packaging: 1 pc, paper box







4 891199 183935

P8511 | 1/-/-/12

14 51 704 100 | SALE

- source of light: CREE SMD LED
- maximal light output: 300 lm
- maximal beam distance: 100 m
- number of lighting modes: 3
- runtime: 4.5–15 hrs
- focus
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: textile loop
- dimensions: 32 × 108 mm
- weight: 120 g
- packaging: 1 pc, paper box







4 891199 183874

P8506 | 1/-/-/12

14 51 703 200

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED + CREE SMD LED
- maximal light output: 180 lm
- maximal beam distance: 100 m
- number of lighting modes: 3
- runtime: 2–20 hrs
- focus
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 2× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: magnet, metal clip
- dimensions: 26 × 165 mm
- weight: 128 g
- packaging: 1 pc, paper box





180 LUMENS | 100 m | 20 h | IPX4 | 1 m | 128 g | 2× AA | Alu | COB light

4 891199 183904

P8504 14 51 703 300 — 1/-/-/12

- source of light: 1× LED
- maximal light output: 20 lm
- maximal beam distance: 25 m
- number of lighting modes: 1
- runtime: 3 hrs
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 1× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: metal snap-hook
- dimensions: 18 × 89 mm
- weight: 37 g
- packaging: 1 pc, paper box





20 LUMENS | 25 m | 3 h | IPX4 | 1 m | 37 g | 1× AAA | Alu | lightweight

4 891199 183645

P8502 14 51 701 200 — 1/-/12/72

- source of light: CREE SMD LED
- maximal light output: 100 lm
- maximal beam distance: 75 m
- number of lighting modes: 2
- runtime: 2–7 hours
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 1× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: textile loop
- dimensions: 22.5 × 95 mm
- weight: 64 g
- packaging: 1 pc, paper box





100 LUMENS | 75 m | IPX4 | 7 h | 1 m | 64 g | 1× AA | Alu | 2 LIGHTING MODES

4 891199 214479

P8507 14 51 703 110 — 1/-/-/12 — SALE

- source of light: COB LED + CREE LED
- maximal light output: 550 lm
- maximal beam distance: 110 m
- number of lighting modes: 4
- runtime: 20 hrs
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 3× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: magnet, metal clip
- dimensions: 27.5 × 193 mm
- weight: 217 g
- packaging: 1 pc, paper box





550 LUMENS | 110 m | IPX4 | 20 h | 1 m | 217 g | 3× AA | Alu | 4 LIGHTING MODES

4 891199 190223

P8508 14 51 703 402 — 1/-/-/12

- source of light: CREE LED
- maximal light output: 1 000 lm
- maximal beam distance: 170 m
- number of lighting modes: 5
- runtime: 40 hrs
- focus
- impact resistance: 2 m
- waterproof: IPX7
- rechargeable
- battery: Li-Ion
- battery type: 18650/3.7 V/2 600 mAh
- batteries included
- recharge time: 4 hrs
- power connector type: micro USB
- dimensions: 142.5 × 33 mm
- weight: 140 g/190 g
- packaging: 1 pc, paper box





1000 LUMENS | 170 m | IPX7 | 40 h | 2 m | 190 g | 1× 18650 | Alu | 5 LIGHTING MODES

4 891199 190193

P8512 14 51 704 201 — 1/-/-/12

GP Everyday

- lightweight and compact flashlights for everyday use
- ready-made fixing for any wrist strap
- ocus on the head of the flashlight for precise light focusing
- made of durable plastic

- source of light: LED
- maximal light output: 50 lm
- maximal beam distance: 30 m
- number of lighting modes: 1
- runtime: 24 hours
- focus: yes (screwable)
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 1× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: hole for strap
- dimensions: 36 × 126 mm
- weight: 62 g
- packaging: 1 pc, blister







P8105 1/-/-/12

14 51 710 500

- source of light: LED
- maximal light output: 70 lm
- maximal beam distance: 45 m
- number of lighting modes: 1
- runtime: 24 hours
- focus: yes (screwable)
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 2× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: hole for strap
- dimensions: 42 × 166 mm
- weight: 106 g
- packaging: 1 pc, blister







P8107 1/-/-/12

14 51 710 700

GP

Headlights

GP Xplor

- ultra-light trail running headlamps
- natural part of sports and professional equipment
- quality CREE LED chips for high luminous flux
- water-resistant (IPX6) and impact-resistant (from up to 1 m)
- AAA powered or as a rechargeable version
- compatible with single-use and rechargeable batteries
- Button Lock – protects against switching on accidentally

- source of light: 3× CREE SMD LED
- maximal light output: 500 lm
- maximal beam distance: 85 m
- number of lighting modes: 10
- runtime: 60 s – 100 hrs
- reflective head strap
- impact resistance: 1 m
- waterproof: IPX6
- charging

- power supply: Li-Po
- battery type: Li-Po 1 600 mAh
- batteries included
- accessories: USB-C cable
- dimensions: 56 × 38 × 39 mm
- weight: 59.5 g
- packaging: 1 pc, small paper box







4 891199 203879

P8567 1/-/-/10

14 51 085 670

- source of light: 2× Osram SMD LED
- maximal light output: 1 200 lm
- maximal beam distance: 110 m
- number of lighting modes: 11
- runtime: 2–100 hrs
- reflective head strap
- impact resistance: 1.5 m
- waterproof: IPX8
- charging

- power supply: Li-ion/2× CR123A
- battery type: 18650/3,7 V/2 550 mAh
- batteries included
- accessories: USB□A USB□C cable 30 cm
- dimensions: 91.5 × 39 × 51 mm
- weight: 90 g/151 g
- packaging: 1 pc, small paper box







4 891199 203893

P8569 1/-/-/10

14 51 701 900

GP Discovery

- headlamps for everyday use and more demanding activities
- powerful and energy-efficient LED lighting (selected models with CREE LED)
- durable design made of plastic or metal depending on the model
- surface finish enhancing scratch resistance
- water resistance up to IPX6
- selected models with rechargeable battery

- source of light: CREE SMD LED
- maximal light output: 600 lm
- maximal beam distance: 130 m
- number of lighting modes: 5
- runtime: 40 s – 60 hrs
- impact resistance: 1 m
- waterproof: IPX4
- charging
- power supply: Li-Ion

- battery type: 18650/3,7 V/2 550 mAh
- batteries included
- accessories: micro USB cable
- dimensions: 106 × 27 × 27 mm
- weight: 153 g
- packaging: 1 pc, small paper box







4 891199 190131

P8555 1/-/-/10

14 51 703 500

- source of light: CREE SMD LED
- maximal light output: 300 lm
- maximal beam distance: 157 m
- number of lighting modes: 4
- runtime: 5–69 hrs
- impact resistance: 1 m
- waterproof: IPX6
- charging
- power supply: 3× AAA

- battery type: HR03 (1.5 V)
- batteries included
- accessories: micro USB cable
- dimensions: 34 × 46 × 56 mm
- weight: 110 g
- packaging: 1 pc, small paper box







4 891199 205200

P8572 1/-/6/24

14 51 704 101

SALE

- source of light: CREE SMD LED
- maximal light output: 300 lm
- maximal beam distance: 157 m
- number of lighting modes: 4
- runtime: 5–69 hrs
- impact resistance: 1 m
- waterproof: IPX6
- charging: no
- power supply: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 34 × 46 × 56 mm
- weight: 110 g
- packaging: 1 pc, small paper box







4 891199 205187

P8571 1/-/6/24

14 51 704 600

- source of light: 2× SMD LED
- maximal light output: 110 lm
- maximal beam distance: 40 m
- number of lighting modes: 4
- runtime: 15 hours
- impact resistance: 1 m
- waterproof: IP43
- charging: no
- power supply: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 59 × 46 × 34 mm
- weight: 29 g/65 g
- packaging: 1 pc, small paper box







4 891199 210990

P8582 1/-/-/10

14 51 704 200

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: 2× SMD LED + LED
- maximal light output: 150 lm
- maximal beam distance: 45 m
- number of lighting modes: 5
- runtime: 36 hours
- impact resistance: 1 m
- waterproof: IPX4
- charging: no
- power supply: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 61 × 47 × 37 mm
- weight: 42 g/78 g
- packaging: 1 pc, small paper box





150 LUMENS | 45 m | 36 h | IPX4 | 1 m | 78 g | 3× AAA | spot·flood light | red light | 5 LIGHTING MODES

4 891199 211027

P8583 1/-/-/10

14 51 704 300

- source of light: 2× SMD LED
- maximal light output: 300 lm
- maximal beam distance: 60 m
- number of lighting modes: 6
- runtime: 36 hours
- impact resistance: 1 m
- waterproof: IPX4
- charging: no
- power supply: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 61 × 47 × 37 mm
- weight: 42 g/78 g
- packaging: 1 pc, small paper box





300 LUMENS | 60 m | 36 h | IPX4 | 1 m | 78 g | 3× AAA | Touchless control | spot·flood light | red light

4 891199 211058

P8584 1/-/-/10

14 51 704 400

- source of light: 2× CREE SMD LED
- maximal light output: 280 lm
- maximal beam distance: 90 m
- number of lighting modes: 6
- runtime: 25 hours
- impact resistance: 5 m
- waterproof: IPX5
- charging: no
- power supply: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 66 × 49 × 37 mm
- weight: 95 g
- packaging: 1 pc, small paper box





280 LUMENS | 90 m | 25 h | IPX5 | 5 m | 95 g | 3× AAA | 3 YEARS WARRANTY | spot·flood light | red light

4 891199 211089

P8573 1/-/-/10

14 51 705 300

SALE

- source of light: 2× CREE SMD LED
- maximal light output: 375 lm
- maximal beam distance: 110 m
- number of lighting modes: 4
- runtime: 26 hours
- impact resistance: 5 m
- waterproof: IPX5
- charging: no
- power supply: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 66 × 49 × 37 mm
- weight: 62 g/98 g
- packaging: 1 pc, small paper box





375 LUMENS | 110 m | 26 h | IPX5 | 5 m | 98 g | 3× AAA | 3 YEARS WARRANTY | spot·flood light | Touchless control

4 891199 211119

P8574 1/-/-/10

14 51 705 400

EMOS

LED Metal Flashlights

ULTIBRIGHT Flashlights

- premium ultibright flashlights – compact, durable and reliable
- elegant design with a distinctive red ring
- above-standard luminous flux and sufficient beam distance
- includes a lanyard or a practical removable clip
- available in battery-powered and rechargeable versions
- made of high-quality aluminum – high protection against dust and water (IP65), reliably withstand drops even on hard surfaces

- source of light: CREE LED
- maximal light output: 1 200 lm
- maximal beam distance: 280 m
- number of lighting modes: 3
- runtime: 3–11 hrs
- focus: yes (screwable)
- impact resistance
- waterproof: yes (IP65)
- rechargeable

- battery: Li-Ion 26650
- battery type: 5 000 mAh/3.7 V
- batteries included
- recharge time: 11.5 hrs
- power connector type: USB C
- features: hand strap
- dimensions: 157 × 40 × 40 mm
- weight: 295 g
- packaging: 1 pc, box





8 592920 089798

P3190 1/-/4/16

14 50 000 340

- source of light: CREE LED
- maximal light output: 600 lm
- maximal beam distance: 230 m
- number of lighting modes: 3
- runtime: 3.5–12 hrs
- focus: yes (screwable)
- impact resistance
- waterproof: yes (IP65)
- rechargeable

- battery: Li-Ion 18650
- battery type: 2 600 mAh/3.7 V
- batteries included
- recharge time: 4.5 hrs
- power connector type: USB C
- features: hand strap
- dimensions: 151 × 34 × 34 mm
- weight: 189 g
- packaging: 1 pc, box





8 592920 089767

P3180 1/-/4/16

14 50 000 330

- source of light: CREE LED
- maximal light output: 340 lm
- maximal beam distance: 200 m
- number of lighting modes: 2
- runtime: 3–5,5 hrs
- focus: yes (screwable)
- impact resistance
- waterproof: yes (IP65)
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: clip, loop
- dimensions: 124 × 34 × 34 mm
- weight: 112 g
- packaging: 1 pc, box





8 592920 089736

P3170 1/-/4/16

14 40 013 123

EMOS
A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: CREE LED
- maximal light output: 170 lm
- maximal beam distance: 100 m
- number of lighting modes: 1
- runtime: 2.5 hrs
- impact resistance
- waterproof: yes (IP65)
- rechargeable: no
- battery: 1× AA

- battery type: LR6 (1,5 V)
- batteries included: no
- features: clip, loop
- dimensions: 101 × 22 × 22 mm
- weight: 47 g
- packaging: 1 pc, box





LED | 170 lm | 100 m | Water resistance | 1× AA | 3 YEARS WARRANTY

8 592920 089705

P3160 1/-/8/32

14 40 011 203

- source of light: CREE LED
- maximal light output: 100 lm
- maximal beam distance: 65 m
- number of lighting modes: 1
- runtime: 3 hrs
- impact resistance
- waterproof: yes (IP65)
- rechargeable: no
- battery: 1× AAA

- battery type: LR03 (1.5 V)
- batteries included: no
- features: clip, loop
- dimensions: 98 × 16 × 16 mm
- weight: 32 g
- packaging: 1 pc, box





LED | 100 lm | 65 m | Water resistance | 1× AAA | 3 YEARS WARRANTY

8 592920 089675

P3150 1/-/8/32

14 40 011 100

EMOS Flashlights

- lightweight yet durable construction
- most models are water-resistant, impact-resistant and equipped with a lanyard
- selected models offer adjustable beam focus to suit different needs
- available in battery-powered and rechargeable versions

- source of light: LED
- maximal light output: 3 000 lm
- maximal beam distance: 300 m
- number of lighting modes: 4
- runtime: 3,5–15 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable

- battery: Li-Ion 26650
- battery type: 5 000 mAh/3.7 V
- batteries included
- recharge time: 6 hrs
- power connector type: USB-C
- features: hand strap
- dimensions: 175 × 45 × 45 mm
- weight: 360 g
- packaging: 1 pc, box





LED | 3 000 lm | 300 m | Water resistance | RECHARGEABLE | 4 LIGHTING MODES

8 592920 144442

P3122 1/-/6/24

14 50 000 540

- source of light: LED
- maximal light output: 1 200 lm
- maximal beam distance: 200 m
- number of lighting modes: 4
- runtime: 4–22 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable

- battery: Li-Ion 18650
- battery type: 2 200 mAh/3.7 V
- batteries included
- recharge time: 4.5 hrs
- power connector type: USB-C
- features: clip, magnet, hand strap
- dimensions: 150 × 35 × 35 mm
- weight: 168 g
- packaging: 1 pc, box





LED | 1 200 lm | 200 m | Water resistance | RECHARGEABLE | 4 LIGHTING MODES

8 592920 144411

P3121 1/-/6/24

14 50 000 530

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: LED
- maximal light output: 300 lm
- maximal beam distance: 100 m
- number of lighting modes: 4
- runtime: 3–18 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable

- battery: Li-Ion 16340
- battery type: 700 mAh/3.7 V
- batteries included
- recharge time: 2,5 h
- power connector type: USB-C
- features: clip, magnet, hand strap
- dimensions: 90 × 25 × 25 mm
- weight: 63 g
- packaging: 1 pc, box





LED | 300 lm | 100 m | Water resistance

RECHARGEABLE | 4 LIGHTING MODES

8 592920 144367

P3120 1/-/10/40

14 50 000 520

- source of light: SMD LED + COB LED
- maximal light output: 600 lm
- maximal beam distance: 350 m
- number of lighting modes: 8
- runtime: 1–11 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable

- battery: Li-Ion 18650
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 4 hrs
- power connector type: USB-C
- features: hook, red, green, blue, white diffuser
- dimensions: 34 × 160 mm
- weight: 121 g
- packaging: 1 pc, box





COB + LED | 600 lm | 350 m | Water resistance

RECHARGEABLE | 8 LIGHTING MODES

8 592920 137161

P3118 1/-/6/24

14 50 000 450

- source of light: LED
- maximal light output: 600 lm
- maximal beam distance: 230 m
- number of lighting modes: 3
- runtime: 4–8 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable

- battery: Li-Ion 18650 or 3× AAA
- battery type: 2 000 mAh/3.7 V or LR03 (1.5 V)
- batteries included
- recharge time: 4 hrs
- power connector type: USB C
- features: hand strap
- dimensions: 183 × 41 × 41 mm
- weight: 230 g
- packaging: 1 pc, box





LED | 600 lm | 230 m | Water resistance

RECHARGEABLE | 3 LIGHTING MODES

8 592920 092224

P3116 1/-/10/20

14 40 011 500

- source of light: LED
- maximal light output: 500 lm
- maximal beam distance: 160 m
- number of lighting modes: 3
- runtime: 5.5–22 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable: no

- battery: 4× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 128 × 37 × 37 mm
- weight: 129 g
- packaging: 1 pc, paper blister





LED | 500 lm | 160 m | Water resistance

4× AAA | 3 LIGHTING MODES

8 592920 092194

P3115 1/-/6/24

14 40 014 100

- source of light: LED
- maximal light output: 330 lm
- maximal beam distance: 120 m
- number of lighting modes: 3
- runtime: 10–27 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 128 × 37 × 37 mm
- weight: 121 g
- packaging: 1 pc, paper blister





LED | 330 lm | 120 m | Water resistance

3× AAA | 3 LIGHTING MODES

8 592920 092163

P3114 1/-/6/24

14 40 013 125

EMOS A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: LED
- maximal light output: 120 lm
- maximal beam distance: 90 m
- number of lighting modes: 1
- runtime: 7 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable: no
- battery: 2× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 131 × 21 × 21 mm
- weight: 48 g
- packaging: 1 pc, paper blister





LED | 120 lm | 90 m | Water resistance | 2× AAA

8 592920 092132

P3113 1/-/6/30

14 40 012 111

- source of light: LED + COB LED
- maximal light output: 230 lm
- maximal beam distance: 210 m
- number of lighting modes: 3
- runtime: 1.5–6 hrs
- focus
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: loop, 1× magnet
- dimensions: 150 × 37 × 37 mm
- weight: 158 g
- packaging: 1 pc, blister





COB + LED | 230 lm | 210 m | 3× AAA | 3 LIGHTING MODES

8 592920 071908

P3111 1/-/6/18

14 40 813 170

- source of light: COB LED
- maximal light output: 120 lm
- maximal beam distance: 20 m
- number of lighting modes: 1
- runtime: 60 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 102 × 28 × 28 mm
- packaging: 1 pc, blister





COB | 120 lm | 20 m | Water resistance | 3× AAA

8 592920 040874

P4704 1/-/12/60

14 40 813 150

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 15 m
- number of lighting modes: 1
- runtime: 35 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 85 × 25 × 25 mm
- weight: 34 g
- packaging: 1 pc, blister





COB | 100 lm | 15 m | 3× AAA

8 592920 036228

P3894 1/-/12/60

14 40 813 110

EMOS

LED Plastic Flashlights

- compact and lightweight flashlights suitable for everyday use
- a wide range of flashlights for home use, travel, camping and everyday use
- selected models are water-resistant, impact-resistant and equipped with a lanyard for comfortable carrying and hanging
- available in battery-powered and rechargeable versions

- source of light: LED
- maximal light output: 75 lm
- maximal beam distance: 130 m
- number of lighting modes: 1
- runtime: 72 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 120 × 35 × 35 mm
- weight: 83 g
- packaging: 1 pc, paper blister





LED | 75 lm | 130 m | Water resistance | 3× AAA

8 592920 038673

P4702 1/-/10/50

14 40 013 114

- source of light: LED
- maximal light output: 55 lm
- maximal beam distance: 125 m
- number of lighting modes: 1
- runtime: 16 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 2× AA
- battery type: LR6 (1,5 V)
- batteries included: no
- features: hand strap
- dimensions: 155 × 45 × 45 mm
- weight: 73 g
- packaging: 1 pc, paper blister





LED | 55 lm | 125 m | 2× AA

8 592920 080443

P3210 1/-/6/24

14 40 004 904

- source of light: LED
- maximal light output: 20 lm
- maximal beam distance: 35 m
- number of lighting modes: 1
- runtime: 30 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× AA
- battery type: LR6 (1,5 V)
- batteries included: no
- features: hand strap
- dimensions: 162 × 43 × 43 mm
- weight: 85 g
- packaging: 1 pc, paper blister





LED | 20 lm | 35 m | Water resistance | 2× AA

8 595025 395160

P3861 1/-/-/24

14 40 032 202

EMOS
A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: LED
- maximal light output: 20 lm
- maximal beam distance: 75 m
- number of lighting modes: 1
- runtime: 140 hrs
- impact resistance: no
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× D

- battery type: LR20 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 190 × 68 × 68 mm
- weight: 216 g
- packaging: 1 pc, paper blister





LED | 20 lm | 75 m | Water resistance | 2× D

8 595025 395153

P3862 1/-/-/10

14 40 032 400

- source of light: COB LED
- maximal light output: 300 lm
- maximal beam distance: 15 m
- number of lighting modes: 1
- runtime: 5 hrs
- impact resistance
- rechargeable: no
- battery: 3× AA
- battery type: LR6 (1,5 V)

- batteries included: no
- features: 1× hook, 1× magnet
- dimensions: 85 × 130 × 85mm
- packaging: 1 pc, box





COB | 300 lm | 15 m | 3× AA

8 592920 037492

P4006 1/-/-/16

14 47 003 100

- source of light: LED
- maximal light output: 10 lm
- maximal beam distance: 7 m
- number of lighting modes: 2
- runtime: 25–35 hrs
- rechargeable: no
- battery: 1× AAA
- battery type: LR03 (1.5 V)
- batteries included: no

- features: clip
- dimensions: 259 × 20 × 25 mm
- weight: 30 g
- packaging: 1 pc, blister





LED | 10 lm | 7 m | 1× AAA | 2 LIGHTING MODES

8 592920 106839

P3400 1/-/10/20

14 40 211 100

- source of light: LED + COB LED
- maximal light output: 150 lm
- maximal beam distance: 150 m
- number of lighting modes: 4
- runtime: 2–4.5 h
- focus
- impact resistance
- waterproof: IP44
- rechargeable

- battery: Li-Ion 18650
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2 hrs
- power connector type: micro USB
- dimensions: 132 × 35 × 32 mm
- weight: 80 g
- packaging: 1 pc, box





COB + LED | 150 lm | 150 m | Water resistance | RECHARGEABLE | 4 LIGHTING MODES

8 592920 137444

P3214 1/-/6/36

14 40 004 908

- source of light: 3× COB LED + red LED
- maximal light output: 350 lm
- maximal beam distance: 20 m
- number of lighting modes: 5
- runtime: 2–4.5 h
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-Ion

- battery type: 1 800 mAh/3.7 V
- batteries included
- recharge time: 5 hrs
- power connector type: micro USB
- features: swivel handle
- dimensions: 270 × 50 × 245 mm
- weight: 590 g
- packaging: 1 pc, paper box





COB + LED | 350 lm | 20 m | RECHARGEABLE | 5 LIGHTING MODES

8 592920 150276

P4010 1/-/4/8

14 40 041 500

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: LED + SMD LED
- maximal light output: 80 lm
- maximal beam distance: 170 m
- number of lighting modes: 2
- runtime: 3,5–5 hrs
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-Ion

- battery type: 800 mAh/3,7 V
- batteries included
- recharge time: 1.5 h
- power connector type: USB-C
- dimensions: 43 × 55 × 134 mm
- weight: 80 g
- packaging: 1 pc, paper card





LED | 80 lm | 170 m | RECHARGEABLE | 2 LIGHTING MODES

8 592920 140611

P3215 1/-/6/18

14 50 000 500

- source of light: SMD LED + LED
- maximal light output: 25 lm
- maximal beam distance: 5 m
- number of lighting modes: 4
- runtime: 14–65 hrs
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-Ion

- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2,5 h
- power connector type: USB-C
- dimensions: 65 × 60 × 155 mm
- weight: 152 g
- packaging: 1 pc, box





LED | 25 lm | 5 m | RECHARGEABLE | 4 LIGHTING MODES

8 592920 149744

P3216 1/-/-/30

14 50 000 560

LED Headlights

- models suitable for running, hiking, camping and fishing
- children's headlamps made of safe materials
- multiple lighting modes for universal use
- selected models are water-resistant, impact-resistant, equipped with a motion sensor, reflective elements or SOS features
- available in battery-powered, rechargeable and hybrid versions

---

- source of light: COB LED + LED
- maximal light output: 380 lm
- maximal beam distance: 30 m
- number of lighting modes: 4
- runtime: 3–12 hrs
- impact resistance
- waterproof: yes (IP43)
- charging
- power supply: Li-pol

- battery type: 1 200 mAh/3.7 V
- batteries included
- accessories: USB-C cable
- dimensions: 290 × 32 × 21 mm
- weight: 73 g
- packaging: 1 pc, small paper box





COB + LED | 380 lm | 30 m | Water resistance | RECHARGEABLE | 4 LIGHTING MODES

8 592920 112571

P3541 1/-/6/24

14 41 292 150

- source of light: CREE LED + COB LED (green, red) +
- maximal light output: 330 lm
- maximal beam distance: 65 m
- number of lighting modes: 7
- runtime: 18–72 hrs
- reflective head strap
- impact resistance
- waterproof: yes (IP44)
- charging: no

- power supply: 3× AAA + 1× CR2032
- battery type: LR03 (1.5 V) + CR2032 (3 V)
- batteries included: 1× CR2032
- accessories: helmet hooks
- dimensions: 65 × 32 × 39 mm
- weight: 80 g/115 g
- packaging: 1 pc, paper blister





COB + LED | 330 lm | 65 m | Water resistance | 3× AAA | 7 LIGHTING MODES

8 592920 036365

P3531 1/-/6/24

14 41 233 110

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: CREE LED
- maximal light output: 230 lm
- maximal beam distance: 80 m
- number of lighting modes: 4
- runtime: 3–13 hrs
- reflective head strap
- impact resistance
- waterproof: no
- charging

- power supply: Li-pol
- battery type: 1 200 mAh (3.7 V)
- batteries included
- accessories: power cable
- dimensions: 61 × 37 × 31 mm
- weight: 60 g
- packaging: 1 pc, paper blister





LED | 230 lm | 80 m | RECHARGEABLE | 4 LIGHTING MODES

8 592920 049990

P3534 1/-/10/40

14 41 250 920

- source of light: CREE LED + 2× red LED
- maximal light output: 330 lm
- maximal beam distance: 200 m
- number of lighting modes: 5
- runtime: 50–87 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- charging: no

- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 60 × 48 × 43 mm
- weight: 70 g/105 g
- packaging: 1 pc, paper blister





LED | 330 lm | 200 m | Water resistance | 3× AAA | 5 LIGHTING MODES

8 592920 084564

P3539 1/-/6/24

14 41 341 100

- source of light: LED + COB LED (green, red)
- maximal light output: 220 lm
- maximal beam distance: 100 m
- number of lighting modes: 7
- runtime: 45–160 hrs
- reflective head strap
- impact resistance
- waterproof: yes (IP43)
- charging: no

- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 65 × 45 × 50 mm
- weight: 65 g/100 g
- packaging: 1 pc, paper blister





COB + LED | 220 lm | 100 m | Water resistance | 3× AAA | 7 LIGHTING MODES

8 592920 080313

P3536 1/-/6/24

14 41 263 110

- source of light: COB LED
- maximal light output: 150 lm
- maximal beam distance: 20 m
- number of lighting modes: 3
- runtime: 8–27 hrs
- reflective head strap
- impact resistance
- waterproof: no
- charging: no

- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 60 × 40 × 40 mm
- weight: 53 g/88 g
- packaging: 1 pc, paper blister





COB | 150 lm | 20 m | 3× AAA | 3 LIGHTING MODES

8 592920 029633

P3528 1/-/6/24

14 41 203 100

- source of light: LED + 2× red LED
- maximal light output: 85 lm
- maximal beam distance: 65 m
- number of lighting modes: 4
- runtime: 50–120 hrs
- reflective head strap
- impact resistance
- waterproof: yes (IP43)
- charging: no

- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 58 × 38 × 44 mm
- weight: 54 g/89 g
- packaging: 1 pc, paper blister





LED | 85 lm | 65 m | Water resistance | 3× AAA | 4 LIGHTING MODES

8 592920 004753

P3521 1/-/8/32

14 41 162 100

EMOS A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 110 lm
- maximal beam distance: 15 m
- number of lighting modes: 3
- runtime: 20–40 hrs
- impact resistance
- waterproof: no
- charging: no
- power supply: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 60 × 18 × 40 mm
- weight: 21 g/56 g
- packaging: 1 pc, paper blister





COB | 110 lm | 15 m | 3× AAA | 3 LIGHTING MODES

8 592920 080252

P3537 1/-/12/48

14 41 273 110

- source of light: 3× LED
- maximal light output: 12 lm
- maximal beam distance: 12 m
- number of lighting modes: 3
- runtime: 55 hrs
- reflective head strap
- impact resistance
- waterproof: yes (IP44)
- charging: no

- power supply: 2× CR2032
- batteries included
- weight: 47 g
- packaging: 8 pcs, display box





LED | 12 lm | 12 m | Water resistance | 2× CR2032 | 3 LIGHTING MODES

8 592920 096697

P3540 8/-/8/24

14 41 212 901

- source of light: COB LED + LED
- maximal light output: 500 lm
- maximal beam distance: 130 m
- number of lighting modes: 7
- runtime: 4–6.5 hrs
- reflective head strap
- impact resistance
- waterproof: yes (IP44)
- charging

- power supply: Li-pol
- battery type: 1 200 mAh/3.7 V
- batteries included
- accessories: USB-C cable
- dimensions: 70 × 45 × 35 mm
- weight: 90 g
- packaging: 1 pc, small paper box





COB + LED | 500 lm | 130 m | Water resistance | RECHARGEABLE | 7 LIGHTING MODES

8 592920 122716

P3542 1/-/6/24

14 41 317 000

- source of light: LED
- maximal light output: 80 lm
- maximal beam distance: 7 m
- number of lighting modes: 6
- runtime: 5–10 hrs
- impact resistance
- waterproof: no
- charging
- power supply: Li-pol

- battery type: 500 mAh/3.7 V
- batteries included
- accessories: power cable
- dimensions: 50 × 60 × 37 mm
- weight: 55 g
- packaging: 1 pc, paper blister





LED | 80 lm | 7 m | rechargeable | 6 LIGHTING MODES | MULTI COLOUR

8 592920 149782

P3543 1/-/10/40

14 41 351 500

- source of light: LED
- maximal light output: 500 lm
- maximal beam distance: 120 m
- number of lighting modes: 2
- runtime: 1–4 hrs
- reflective head strap
- impact resistance
- waterproof: no
- charging

- power supply: Li-Ion
- battery type: 800 mAh/3,7 V
- batteries included
- accessories: USB-C cable
- dimensions: 80 × 29 × 30 mm
- weight: 60 g
- packaging: 1 pc, small paper box





LED | 500 lm | 120 m | RECHARGEABLE | 2 LIGHTING MODES | REFLEX

8 592920 153574

P3544 1/-/6/24

14 41 361 900

NEW

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: 3× LED
- maximal light output: 175 lm
- maximal beam distance: 50 m
- number of lighting modes: 5
- runtime: 2–4.5 h
- impact resistance
- waterproof: yes (IP43)
- charging
- power supply: Li-pol
- battery type: 800 mAh/3,7 V
- batteries included
- accessories: USB-C cable
- dimensions: 52 × 29 × 35 mm
- weight: 56 g
- packaging: 1 pc, small paper box




LED | 175 lm | 50 m | RECHARGEABLE | 5 LIGHTING MODES

8 592920 152515

P3545 1/-/6/36

14 41 371 900

- source of light: 7× LED
- maximal light output: 550 lm
- maximal beam distance: 110 m
- number of lighting modes: 7
- runtime: 3.5–9 hrs
- reflective head strap
- impact resistance
- waterproof: yes (IP45)
- charging
- power supply: Li-pol / 3×AAA
- battery type: 1 000 mAh (3,7 V) / LR03 (1,5 V)
- batteries included: yes (Li-pol)
- accessories: USB-C cable
- dimensions: 64 × 48 × 32 mm
- weight: 77 g
- packaging: 1 pc, small paper box




LED | 550 lm | 110 m | Water resistance | RECHARGEABLE | 7 LIGHTING MODES | red light

8 592920 155806

P3546 1/-/6/36

14 41 381 900

NEW

EMOS

LED Work Lights

LED Rechargeable Work Lights

- lightweight and compact work lights
- highly flexible during work – adjustable handle, rotating stand, hook or magnet
- multiple lighting modes for universal use
- hardened ABS plastic with rubberized surface resists most common impacts and drops
- selected models are water-resistant with power bank function
- USB cable included

- source of light: COB LED cold + COB LED warm
- maximal light output: 900 lm
- maximal beam distance: 35 m
- number of lighting modes: 16
- runtime: 3,5–12,5 h
- impact resistance
- rechargeable
- battery: Li-Ion
- battery type: 4 400 mAh/3.7 V
- batteries included
- recharge time: 4.5 hrs
- power connector type: USB C
- features: magnet, rotating stand, hook
- dimensions: 125 × 45 × 95 mm
- weight: 325 g
- packaging: 1 pc, box




COB | 900 lm | 35 m | RECHARGEABLE | PowerBank

8 592920 129524

P4542 1/-/-/12

14 50 000 420

EMOS A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 1 200 lm
- maximal beam distance: 60 m
- number of lighting modes: 3
- runtime: 3.5–6.5 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-pol

- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB C
- features: magnet, stand, clip
- dimensions: 80 × 45 × 80 mm
- weight: 160 g
- packaging: 1 pc, box




COB | 1 200 lm | 60 m | Water resistance | RECHARGEABLE | 3 LIGHTING MODES

8 592920 129500

P4543 1/-/-/12

14 50 000 430

- source of light: 2× COB LED
- maximal light output: 2 000 lm
- maximal beam distance: 70 m
- number of lighting modes: 5
- runtime: 3.5–14.5 hrs
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator

- battery type: 8 000 mAh/3.7 V
- batteries included
- recharge time: 7 hrs
- power connector type: USB C
- features: swivel handle, 4× magnet
- dimensions: 214 × 140 (280) × 56 mm
- weight: 818 g
- packaging: 1 pc, box




COB | 2 000 lm | 70 m | RECHARGEABLE | 5 LIGHTING MODES | PowerBank

8 592920 085646

P4536 1/-/4/8

14 50 000 320

- source of light: COB LED
- maximal light output: 1 000 lm
- maximal beam distance: 45 m
- number of lighting modes: 3
- runtime: 3.5–15.5 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 4 400 mAh/3.7 V
- batteries included
- recharge time: 7.5 hrs
- power connector type: micro USB B
- features: swivel handle
- dimensions: 172 × 45 × 126 mm
- weight: 453 g
- packaging: 1 pc, box




COB | 1 000 lm | 45 m | Water resistance | RECHARGEABLE | 3 LIGHTING MODES | PowerBank | 3 YEARS WARRANTY

8 592920 075807

P4533 1/-/-/10

14 50 000 300

- source of light: COB LED
- maximal light output: 600 lm
- maximal beam distance: 35 m
- number of lighting modes: 2
- runtime: 2.5–3.5 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 3 000 mAh/3.7 V
- batteries included
- recharge time: 3.5 hrs
- power connector type: micro USB B
- features: swivel handle
- dimensions: 172 × 45 × 126 mm
- weight: 436 g
- packaging: 1 pc, box




COB | 600 lm | 35 m | Water resistance | RECHARGEABLE | 2 LIGHTING MODES | PowerBank

8 592920 077658

P4534 1/-/-/10

14 50 000 310

SALE

- source of light: COB LED + SMD LED
- maximal light output: 750 lm
- maximal beam distance: 35 m
- number of lighting modes: 6
- runtime: 2–13 h
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion

- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 2,5 h
- power connector type: USB C
- features: rotating reflector, magnet, hook
- dimensions: 28 × 35 × 147/285 mm
- weight: 118 g
- packaging: 1 pc, box




COB + LED | 750 lm | 35 m | Water resistance | RECHARGEABLE | 6 LIGHTING MODES

8 592920 128961

P4540 1/-/5/25

14 50 000 291

EMOS
A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: 2× COB LED + LED
- maximal light output: 670 lm
- maximal beam distance: 40 m
- number of lighting modes: 3
- runtime: 2–10 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator
- battery type: 2 200 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB C
- features: 1× hook, 4× magnet
- dimensions: 35 × 33 × 257 mm
- weight: 225 g
- packaging: 1 pc, box





COB + LED | 670 lm | 40 m | RECHARGEABLE | 3 LIGHTING MODES | PowerBank

8 592920 080078

P4535 1/-/8/16

14 40 004 901

- source of light: COB LED + LED
- maximal light output: 400 lm
- maximal beam distance: 40 m
- number of lighting modes: 3
- runtime: 3–8.5 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion accumulator
- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB C
- features: swivel handle, clip, 1× hook, 1× magnet
- dimensions: 52 × 32 × 165 mm
- weight: 196 g
- packaging: 1 pc, box





COB + LED | 400 lm | 40 m | Water resistance | RECHARGEABLE | 3 LIGHTING MODES

8 592920 072950

P4531 1/-/8/32

14 50 000 280

- source of light: SMD LED + LED
- maximal light output: 700 lm
- maximal beam distance: 45 m
- number of lighting modes: 3
- runtime: 3–6 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2 hrs
- power connector type: USB C
- features: 2× magnet
- dimensions: 37 × 14 × 240 mm
- weight: 100 g
- packaging: 1 pc, box





LED | 700 lm | 45 m | RECHARGEABLE | 3 LIGHTING MODES | light boost

8 592920 092590

P4538 1/-/6/24

14 50 000 360

- source of light: COB LED + SMD LED
- maximal light output: 330 lm
- maximal beam distance: 45 m
- number of lighting modes: 3
- runtime: 3–7 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2–4 hrs
- power connector type: USB C
- features: swivel handle, 1× clip, 1× magnet, 1× hook
- dimensions: 41 × 29 × 154 mm
- weight: 110 g
- packaging: 1 pc, box





COB + LED | 330 lm | 45 m | Water resistance | RECHARGEABLE | 3 LIGHTING MODES

8 592920 092408

P4537 1/-/12/24

14 50 000 350

- source of light: COB LED + SMD LED
- maximal light output: 800 lm
- maximal beam distance: 110 m
- number of lighting modes: 3
- runtime: 2,5–7 h
- impact resistance
- waterproof: yes (IP54)
- rechargeable
- battery: Li-Ion
- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB-C
- features: swivel fold-away handle, 2× hook, 2× mag
- dimensions: 50 × 50 × 255 mm
- weight: 325 g
- packaging: 1 pc, box





COB + LED | 800 lm | 110 m | Water resistance | RECHARGEABLE | 3 LIGHTING MODES

8 592920 134030

P4544 1/-/-/6

14 50 000 440

EMOS A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 1 000 lm
- maximal beam distance: 40 m
- number of lighting modes: 2
- runtime: 2–6 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion
- battery type: 2 600 mAh/7,4 V
- batteries included
- recharge time: 5 hrs
- power connector type: USB-C
- features: 2× swivel fold-away handle, 2× hook, 4× m
- dimensions: 50 × 46 × 500 mm
- weight: 490 g
- packaging: 1 pc, paper box





COB | 1 000 lm | 40 m | Water resistance | RECHARGEABLE | 2 LIGHTING MODES

8 592920 145654

P4545 1/-/-/12

14 50 000 550

- source of light: COB LED + LED
- maximal light output: 500 lm
- maximal beam distance: 30 m
- number of lighting modes: 3
- runtime: 2.5–6 hrs
- impact resistance
- waterproof: yes (IP54)
- rechargeable
- battery: Li-Ion
- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB-C
- features: swivel handle, 1× hook, 1× magnet
- dimensions: 48 × 30 × 207 mm
- weight: 280 g
- packaging: 1 pc, box





COB + LED | 500 lm | 30 m | Water resistance | RECHARGEABLE | 3 LIGHTING MODES

8 592920 157817

P4546 1/-/-/18

14 50 000 580

NEW

LED Work Lights

- lightweight and compact work lights
- high flexibility during work – hook, magnet, rotating or folding handle
- hardened ABS plastic with a rubberized surface withstands most common impacts and drops
- selected models are water-resistant
- models available for AA or AAA batteries

- source of light: 2× COB LED + LED
- maximal light output: 350 lm
- maximal beam distance: 110 m
- number of lighting modes: 2
- runtime: 10–20 hrs
- waterproof: no
- rechargeable: no
- battery: 3× AA
- battery type: LR6 (1,5 V)
- batteries included: no
- features: swivel handle
- dimensions: 135 × 100 × 40 mm
- weight: 140 g
- packaging: 1 pc, paper box





COB + LED | 350 lm | 110 m | 3× AA | 2 LIGHTING MODES

8 592920 119891

P4112 1/-/-/14

14 40 833 200

- source of light: COB LED
- maximal light output: 700 lm
- maximal beam distance: 35 m
- number of lighting modes: 3
- runtime: 8–14 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 4× AA
- battery type: LR6 (1,5 V)
- batteries included: no
- features: swivel handle
- dimensions: 145 ×105 × 35 mm
- weight: 165 g
- packaging: 1 pc, paper box





COB | 700 lm | 35 m | Impact resistance | Water resistance | 4× AA | 3 LIGHTING MODES

8 592920 119877

P4113 1/-/-/14

14 40 814 200

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: COB LED
- maximal light output: 180 lm
- maximal beam distance: 45 m
- number of lighting modes: 2
- runtime: 16–24 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: break-over handle, 1× hook, 2× magnet
- dimensions: 59 × 30 × 133 mm
- weight: 110 g
- packaging: 1 pc, blister





COB | 180 lm | 45 m

3× AAA | 2 LIGHTING MODES

8 592920 028100

P3888 1/-/12/24

14 40 813 100

LED Work Lights – 230 V

- practical work lamps powered from the mains (230 V)
- long power cable – 5 m
- the lights are equipped with hooks for hanging

- power source: 230 V~/50 Hz
- source of light: 20× LED 0,2 W (360 lm)
- type of cable: H05RN-F 2× 1.0 mm² rubber
- cable length: 5 m
- IP rating: IP20
- dimensions: 35 × 470 mm
- packaging: 1 pc, hanging



LED | 360 lm | 230 V~/50 Hz | 5 m

8 592920 032671

P4205 1/-/-/15

14 49 000 050

- power source: 230 V~/50 Hz
- source of light: bulb 60 W max. (not included)
- type of cable: H05RN-F 2× 1.0 mm² rubber
- cable length: 5 m
- IP rating: IP20
- dimensions: 110 × 390 mm
- packaging: 1 pc, hanging



E27 | 230 V~/50 Hz | 5 m

8 595025 385963

P4203 1/-/-/12

14 49 000 030

EMOS

LED Rechargeable flashlights EXPERT

- flashlights designed for everyday use and demanding conditions
- durable construction made of hardened ABS plastic reliably withstands drops and impacts
- large battery capacity for maximum runtime
- most flashlights have multiple light sources and user-friendly strap
- selected models are water-resistant with power bank function
- USB cable included

- source of light: OSRAM LED
- maximal light output: 300 lm
- maximal beam distance: 370 m
- number of lighting modes: 2
- runtime: 24–30 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator

- battery type: 2 400 mAh/3.7 V
- batteries included
- recharge time: 4.5 hrs
- dimensions: 162 × 100 × 140 mm
- weight: 275 g
- packaging: 1 pc, box





LED | 300 lm | 370 m | RECHARGEABLE | 2 LIGHTING MODES

8 592920 107966

P2311 1/-/-/10

14 50 000 370

- source of light: SMD LED + LED
- maximal light output: 350 lm
- maximal beam distance: 260 m
- number of lighting modes: 7
- runtime: 5–23 hrs
- impact resistance
- waterproof
- rechargeable
- battery: Li-Ion accumulator

- battery type: 2× 2 000 mAh/3,7 V
- batteries included
- recharge time: 7 hrs
- power connector type: USB C
- features: swivel handle, 1× hook, 3× magnet
- dimensions: 175 × 91 mm
- weight: 406 g
- packaging: 1 pc, box





LED | 350 lm | 260 m | Water resistance | RECHARGEABLE | 7 LIGHTING MODES | PowerBank

8 592920 119266

P2313 1/-/-/12

14 50 000 400

SALE

- source of light: SMD LED + COB LED
- maximal light output: 210 lm
- maximal beam distance: 240 m
- number of lighting modes: 4
- runtime: 3–6 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion 18650

- battery type: 1 800 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB-C
- dimensions: 200 × 100 × 100 mm
- weight: 281 g
- packaging: 1 pc, box





COB + LED | 210 lm | 240 m | RECHARGEABLE | 4 LIGHTING MODES

8 592920 137147

P2314 1/-/-/6

14 50 000 460

EMOS
A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: LED + COB LED (white, red)
- maximal light output: 700 lm
- maximal beam distance: 370 m
- number of lighting modes: 10+
- runtime: 4–11 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 3 600 mAh/3.7 V
- batteries included
- recharge time: 4 hrs
- power connector type: USB C
- features: rotatable stand
- dimensions: 205 × 125 × 156 mm
- weight: 500 g
- packaging: 1 pc, paper box




COB + LED | 700 lm | 370 m | Water resistance | RECHARGEABLE | 10 LIGHTING MODES | PowerBank | 8 592920 140567

P2315 1/-/-/4

14 50 000 480

- source of light: SMD LED + 2× COB LED
- maximal light output: 850 lm
- maximal beam distance: 400 m
- number of lighting modes: 7+
- runtime: 7–18 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 8 000 mAh/3.7 V
- batteries included
- recharge time: 6 hrs
- power connector type: USB C
- features: LCD indication, tripod thread
- dimensions: 210 × 107 × 148 mm
- weight: 688 g
- packaging: 1 pc, paper box




COB + LED | 850 lm | 400 m | Water resistance | RECHARGEABLE | 7 LIGHTING MODES | PowerBank | 8 592920 141670

P2316 1/-/-/4

14 50 000 510

- source of light: SMD LED + 2× COB LED
- maximal light output: 1 000 lm
- maximal beam distance: 500 m
- number of lighting modes: 8+
- runtime: 10–22 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 15 000 mAh/3.7 V
- batteries included
- recharge time: 10 hrs
- power connector type: USB C
- features: LCD indication, tripod thread
- dimensions: 205 × 102 × 148 mm
- weight: 781 g
- packaging: 1 pc, paper box




COB + LED | 1 000 lm | 500 m | Water resistance | RECHARGEABLE | 8 LIGHTING MODES | PowerBank | 8 592920 140581

P2317 1/-/-/4

14 50 000 490

LED Bike Lights

- front (white) and rear (red) lights in a practical set
- multiple lighting modes for better visibility
- universal bike mount included – quick and easy installation
- most models are water-resistant
- available in battery-powered and rechargeable versions

- source of light: LED/SMD LED
- maximal light output: 90 lm
- maximal beam distance: 35 m
- number of lighting modes: 3/4
- runtime: 2–5 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-pol

- battery type: 500 mAh/3.7 V
- batteries included
- recharge time: 1 h
- power connector type: micro USB B
- dimensions: 27 × 27 × 65 mm/71 × 21 × 18 mm
- weight: 34/25 g
- packaging: 1 pc, blister




LED | 90 lm | 35 m | RECHARGEABLE | 7 LIGHTING MODES | 8 592920 109632

P3923 1/-/5/20

14 46 002 300

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: LED (front), 3× LED (back)
- maximal light output: 150 lm
- maximal beam distance: 110 m
- number of lighting modes: 10
- runtime: 96–172 hrs
- waterproof: yes (IP43)
- rechargeable: no
- battery: front: 3× AAA, back: 2× AAA
- battery type: LR03 (1.5 V)

- batteries included: no
- dimensions: 28 × 103 mm, 30 × 65 × 40 mm
- packaging: 1 pc, blister





LED | 150 lm | 110 m | Water resistance

5× AAA

10 LIGHTING MODES

8 592920 029848

P3920

14 46 002 000

1/-/5/20

- source of light: COB LED white, COB LED red
- maximal light output: 22 lm
- maximal beam distance: 7 m
- number of lighting modes: 2
- runtime: 80 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× 2 CR2032

- battery type: CR2032 (3 V)
- batteries included
- dimensions: 61 × 17 × 32 mm
- packaging: 1 pc, blister





COB | 22 lm | 7 m | Water resistance

4× CR2032

2 LIGHTING MODES

8 592920 071984

P3922

14 46 002 200

1/-/6/12

- source of light: 2× LED white, 2× LED red
- maximal light output: 10 lm
- maximal beam distance: 13 m
- number of lighting modes: 3
- runtime: 140 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× 2 CR2032

- battery type: CR2032 (3 V)
- batteries included
- dimensions: 90 × 29 × 25 mm
- packaging: 1 pc, blister





LED | 10 lm | 13 m | Water resistance

4× CR2032

3 LIGHTING MODES

8 592920 071953

P3921

14 46 002 100

1/-/6/36

EMOS

LED Night Lights

LED Battery Night Lights

- smart solution for areas without access to electricity – ideal for hallways, wardrobes or children's rooms
- easy installation without drilling – using adhesive pads, a magnet or a hook
- models with a switch, light sensor or PIR motion sensor
- available in battery-powered and rechargeable versions

- source of light: COB LED
- light color: cold white
- power source: 3× 1.5 V AAA
- switch
- automatic on/off
- photosensor
- motion sensor
- time delay: 30 seconds +/- 5 seconds
- rotation: 360°
- dimensions: 75 × 75 × 80 mm
- packaging: 1 pc, box





COB | 120 lm | 15 m

3× AAA

8 592920 143919

P3324 1/-/10/40

14 40 013 130

- source of light: 8× LED 5 mm in diameter
- light color: cold white
- power source: 3× 1.5 V AA
- switch
- automatic on/off
- photosensor
- motion sensor
- time delay: 25 seconds +/- 5 seconds
- dimensions: 90 × 37 mm
- packaging: 1 pc, blister





LED | 60 lm | 15 m

3× AA

8 592920 079317

P3310K 1/-/4/16

14 40 883 200

- source of light: LED
- light color: warm white/multicolor
- power source: Li-Ion battery 3.7 V/1,200 mAh
- switch
- automatic on/off
- time delay: 30 minutes
- dimensions: 155 × 85 × 69 mm
- packaging: 1 pc, box





LED | 20 lm | 3 m

RECHARGEABLE | 3 LIGHTING MODES | MULTI COLOUR

8 592920 149614

P3325 1/-/6/24

14 60 000 000

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: 4× LED
- light color: warm white
- power source: 3× 1.5 V AAA
- switch
- dimensions: 71 × 24 mm
- packaging: 2 pcs, paper blister





LED | 15 lm | 3 m | Impact resistance | ON/OFF | 3× AAA | warm white

8 592920 152508

P3327 2/-/10/80

14 40 043 100

- source of light: LED
- light color: warm white–neutral white-cool white
- power source: Li-Ion battery 3.7 V/1200 mAh
- switch
- automatic on/off
- photosensor
- motion sensor
- time delay: 20 seconds +/- 3 seconds
- dimensions: 40 × 30 × 300 mm
- packaging: 1 pc, small paper box





LED | 150 lm | 15 m | Dimmable | PIR sensor | Sensor | RECHARGEABLE

8 592920 161579

P3328 1/-/20/40

14 60 000 010

NEW

LED 230 V Night Lights

- a practical and energy-efficient accessory for every household
- ideal choice for hallways, staircases, bathrooms, bedrooms or children's rooms where gentle night lighting is needed
- models with a switch, light sensor or PIR motion sensor
- selected models also feature a USB output

- source of light: LED
- light color: cold white
- power source: 230 V~/50 Hz, max. 0.5 W
- automatic on/off
- photosensor
- dimensions: 46 × 67 × 46 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | COOL WHITE

8 592920 002148

P3306 1/4/-/36

14 56 000 060

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- automatic on/off
- photosensor
- dimensions: 53 × 53 × 60 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | WARM WHITE

8 592920 109526

P3314 1/-/-/20

14 56 000 110

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- automatic on/off
- photosensor
- dimensions: 65 × 65 × 60 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | WARM WHITE

8 592920 109540

P3315
14 56 000 120

1/-/-/20
SALE

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- switch
- automatic on/off
- photosensor
- dimensions: 80 × 80 × 58 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | ON/OFF | Sensor | WARM WHITE

8 592920 109564

P3316
14 56 000 130

1/-/-/15

- source of light: LED
- light color: warm white
- power source: 230 V
- automatic on/off
- photosensor
- motion sensor
- time delay: 90 seconds +/- 3 seconds
- dimensions: 55 × 80 × 102 mm
- packaging: 1 pc, paper blister





LED | 230 V~/50 Hz | PIR sensor | Sensor | WARM WHITE

8 592920 118450

P3318
14 56 000 150

1/-/-/12

- source of light: SMD LED
- light color: warm white
- power source: 230 V
- switch
- automatic on/off
- photosensor
- motion sensor
- time delay: 30/60/120 seconds
- dimensions: 74 × 54 × 80 mm
- packaging: 1 pc, paper blister





LED | 230 V~/50 Hz | Timer | Dimmable | PIR sensor | Sensor | WARM WHITE

8 592920 118467

P3319
14 56 000 160

1/-/-/15

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- automatic on/off
- photosensor
- dimensions: 79 × 66 × 79 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | 1× | WARM WHITE

8 592920 118658

P3320
14 56 000 170

1/-/3/18
SALE

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz, max. 0,3 W
- switch
- automatic on/off
- photosensor
- dimensions: 60 × 60 × 73 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | ON/OFF | Sensor | 1× USB-C | 1× USB-A | WARM WHITE

8 592920 139240

P3323
14 56 000 200

1/-/5/20
SALE

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- switch
- dimensions: 65 × 65 × 65 mm
- packaging: 1 pc, paper blister





LED | 230 V~/50 Hz | ON/OFF | WARM WHITE

8 592920 150849

P3326
14 56 000 210

1/-/5/20

EMOS

LED display boxes

- a wide range of products for home use, travel, camping and everyday use
- most models available in various color options
- ready to use immediately – batteries included

- source of light: COB LED
- maximal light output: 110 lm
- maximal beam distance: 15 m
- number of lighting modes: 3
- runtime: 20–40 hrs
- impact resistance
- waterproof: no
- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 60 × 18 × 40 mm
- weight: 21 g/56 g
- packaging: 12 pcs, display box





COB | 110 lm | 15 m | 3× AAA | 3 LIGHTING MODES

8 592920 080344

P3538
14 41 283 110

12/-/12/60

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: COB LED + LED
- maximal light output: 230 lm
- maximal beam distance: 80 m
- number of lighting modes: 2
- runtime: 47–72 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: clip
- dimensions: 168 × 29 × 26 mm
- weight: 64 g
- packaging: 16 pcs, display box





COB + LED | 230 lm | 80 m | 3× AAA | 2 LIGHTING MODES

8 592920 037102

P3897 16/-/16/64

14 40 813 130

- source of light: LED
- maximal light output: 75 lm
- maximal beam distance: 125 m
- number of lighting modes: 1
- runtime: 15 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: hand strap
- dimensions: 120 × 35 × 35 mm
- weight: 83 g
- packaging: 12 pcs, display box





LED | 75 lm | 125 m | Water resistance | 3× AAA

8 592920 038710

P4703 12/-/12/96

14 40 013 115

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 20 m
- number of lighting modes: 1
- runtime: 28 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: hand strap
- dimensions: 102 × 28 × 28 mm
- packaging: 12 pcs, display box





COB | 100 lm | 20 m | Water resistance | 3× AAA

8 592920 042625

P4705 12/-/12/96

14 40 813 160

- source of light: 9× LED
- maximal light output: 50 lm
- maximal beam distance: 22 m
- number of lighting modes: 1
- runtime: 30 hrs
- impact resistance
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 88 × 26 × 26 mm
- weight: 71 g
- packaging: 24 pcs, display box





LED | 50 lm | 22 m | 3× AAA

8 595025 395184

P3848A 24/-/24/96

14 40 093 109

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 12 m
- number of lighting modes: 1
- runtime: 25 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: hand strap
- dimensions: 100 × 29 × 29 mm
- weight: 34 g
- packaging: 12 pcs, display box





COB | 100 lm | 12 m | 3× AAA

8 592920 040638

P4706 12/-/12/96

14 40 013 116

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: COB LED
- maximal light output: 30 lm
- maximal beam distance: 8 m
- number of lighting modes: 4
- runtime: 3,5–6 h
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 2× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 63 × 25 × 35 mm
- weight: 38 g
- packaging: 12 pcs, display box



COB | 30 lm | 8 m | 2× AAA | 4 LIGHTING MODES

8 592920 028858

P3887 12/-/12/72

14 40 812 900

- source of light: LED + COB LED
- maximal light output: 120 lm
- maximal beam distance: 130 m
- number of lighting modes: 4
- runtime: 0,5–2 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-ion 14500
- battery type: 400 mAh/3,7 V
- batteries included
- recharge time: 1.5 h
- power connector type: USB C
- dimensions: 123 × 26 × 29 mm
- weight: 50 g
- packaging: 10 pcs, display box



COB + LED | 120 lm | 130 m | RECHARGEABLE | 4 LIGHTING MODES

8 592920 139936

P4720 10/-/10/40

14 50 000 413

- source of light: 2× LED
- maximal light output: 90 lm
- maximal beam distance: 10 m
- number of lighting modes: 3
- runtime: 4,5–6 hrs
- impact resistance: no
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion
- battery type: 400 mAh
- batteries included
- recharge time: 2,5 h
- power connector type: USB-C
- features: 1× hook
- dimensions: 170 × 55 × 55 mm
- weight: 53 g
- packaging: 9 pcs, display box



LED | 90 lm | 10 m | RECHARGEABLE | 3 LIGHTING MODES

8 592920 137406

P4719 9/-/9/18

14 50 000 470

- source of light: LED
- maximal light output: 30 lm
- maximal beam distance: 7 m
- number of lighting modes: 2
- runtime: 25–75 hrs
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× AAA 1,5 V
- battery type: LR03 (1.5 V)
- batteries included
- features: 1×stand
- dimensions: 85 × 85 × 17 mm
- weight: 60 g
- packaging: 10 pcs, display box



LED | 30 lm | 7 m | 3× AAA | 2 LIGHTING MODES

8 592920 137956

P4718 10/-/10/40

14 40 813 102

- source of light: 5× LED + 1× UV LED
- maximal light output: 20 lm
- maximal beam distance: 2 m
- number of lighting modes: 2
- runtime: 30 hrs
- impact resistance
- rechargeable: no
- battery: 2× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: 1×stand
- dimensions: 85 × 198 × 30 mm
- weight: 105 g
- packaging: 10 pcs, display box



LED | 20 lm | 2 m | 2× AAA | 2 LIGHTING MODES

8 592920 135440

P4717 10/-/10/20

14 40 833 300

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: COB LED
- maximal light output: 150 lm
- maximal beam distance: 10 m
- number of lighting modes: 1
- runtime: 5 hrs
- impact resistance: no
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA 1,5 V
- battery type: LR03 (1.5 V)
- batteries included
- features: 1× hook
- dimensions: 108 × 128 mm
- weight: 107 g
- packaging: 6 pcs, display box





COB | 150 lm | 10 m | 3× AAA

8 592920 133415

P4716 6/-/-/6

14 40 013 129

- source of light: COB LED
- maximal light output: 350 lm
- maximal beam distance: 25 m
- number of lighting modes: 1
- runtime: 4 hrs
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: clip, 1× magnet
- dimensions: 42 × 118 × 30 mm
- weight: 48 g
- packaging: 12 pcs, display box





COB | 350 lm | 25 m | 3× AAA

8 592920 132050

P4715 12/-/12/36

14 40 113 100

- source of light: COB LED
- maximal light output: 750 lm
- maximal beam distance: 40 m
- number of lighting modes: 7
- runtime: 45 min – 2 h
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-pol
- battery type: 400 mAh/3,7 V
- batteries included
- recharge time: 1 h
- power connector type: USB C
- features: clip, 1× magnet, rotary stand, bott. opener
- dimensions: 61 × 45 × 21 mm
- weight: 37 g
- packaging: 10 pcs, display box





COB | 750 lm | 40 m | Water resistance | Impact resistance | RECHARGEABLE | 7 LIGHTING MODES

8 592920 124741

P4714 10/-/10/40

14 50 000 410

- source of light: LED
- maximal light output: 10 lm
- number of lighting modes: 2
- runtime: 160 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× CR2032
- battery type: CR2032 (3 V)
- batteries included
- features: arm band
- dimensions: 190 × 35 × 17 mm
- weight: 44 g
- packaging: 16 pcs, display box





LED | 400 m | 160 h | Water resistance | Impact resistance | 2× CR2032 | 2 LIGHTING MODES

8 592920 119648

P4713 16/-/16/32

14 40 812 903

- source of light: 4× LED
- light color: warm white
- power source: 3× 1.5 V AAA (included)
- switch
- dimensions: 79 × 26 mm
- packaging: 10 pcs, display box





LED | 30 lm | 5 m | 3× AAA

8 592920 152539

P4722 10/-/10/40

14 40 033 104

EMOS A brand of Legrand | www.emos.eu | Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 20 m
- number of lighting modes: 3
- runtime: 4.5–8 hrs
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-pol

- battery type: 200 mAh/3,7 V
- batteries included
- recharge time: 1.5 h
- power connector type: USB C
- features: pendant for hanging
- dimensions: 56 × 26 ×10 mm
- weight: 22 g
- packaging: 12 pcs, display box





COB | 100 lm | 20 m | Impact resistance | RECHARGEABLE | 3 LIGHTING MODES

8 592920 155844

P4724 | 14 50 000 570 | 12/-/12/48 | NEW

- source of light: 3× LED
- maximal light output: 200 lm
- maximal beam distance: 85 m
- number of lighting modes: 3
- runtime: 2–5 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-ion 14500

- battery type: 500 mAh/3.7 V
- batteries included
- recharge time: 1.5 h
- power connector type: USB C
- features: clip
- dimensions: 100 × 32 mm
- weight: 38 g
- packaging: 12 pcs, display box





LED | 200 lm | 85 m | RECHARGEABLE | 3 LIGHTING MODES

8 592920 159613

P4725 | 14 50 000 590 | 12/-/12/72 | NEW

- source of light: LED
- maximal light output: 25 lm
- maximal beam distance: 110 m
- number of lighting modes: 1
- runtime: 3 hrs
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× 1,5 V LR44

- battery type: LR44 (1,5 V)
- batteries included
- features: carabiner
- dimensions: 108 × 42 mm
- weight: 44 g
- packaging: 12 pcs, display box





LED | 25 lm | 110 m | 3× LR44 included

8 592920 161654

P4726 | 14 40 013 901 | 12/-/12/48 | NEW

LED Keychains display box

- cute LED keychains for children suitable for attaching to keys or backpacks
- a wide selection of unique designs
- selected models change color or emit sound when illuminated
- made of safe materials – pleasant to touch, durable and safe for children
- ready to use immediately – batteries included

- source of light: LED
- maximal light output: 5 lm
- number of lighting modes: 1
- rechargeable: no
- battery: 3× 1.5 V LR54
- battery type: LR54 (1.5 V)
- batteries included
- packaging: 24 pcs, display box





LED | 5 lm | 3× LR54

8 592920 089613

P4711 | 14 39 013 900 | 24/-/24/96

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: LED
- maximal light output: 5 lm
- number of lighting modes: 1
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× 1.5 V LR54
- battery type: LR54 (1.5 V)
- batteries included

- features: pendant for hanging
- packaging: 18 pcs, display box





LED | 5 lm

3× LR54

8 592920 145692

P4721
14 39 013 902

18/-/18/36

- source of light: LED
- maximal light output: 5 lm
- number of lighting modes: 4
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× 1,5 V LR43
- battery type: LR43 (1,5 V)
- batteries included

- packaging: 12 pcs, display box





LED | 5 lm

3× LR43 included | 4 LIGHTING MODES | MULTI COLOUR

8 592920 153987

P4723
14 39 013 903

12/-/12/48

NEW

Insect killer

- ideal protection against annoying flying insects
- the product is harmless to people and pets
- easy opening and cleaning from the bottom using a stream of water
- low energy consumption and long service life

- source of light: UV-A LED tube
- number of lighting modes: 1
- battery: 220–240 V~/50 Hz
- features: hand strap
- dimensions: 136 × 240 mm
- packaging: 1 pc, box





8 592920 131466

P4104
14 48 000 040

1/-/-/6


Lighting

Comprehensive lighting solutions for a wide range of applications

The Lighting range offers a wide and comprehensive portfolio of light sources and luminaires for domestic, commercial and professional use.

The range includes LED bulbs, tubes, panels, spotlights, as well as garden, industrial and work lights, covering all types of installations and customer needs. Selected models offer high light output, variable colour temperatures and modern design solutions for easy installation.

The breadth of the portfolio allows for effective targeting of different price points and design requirements.

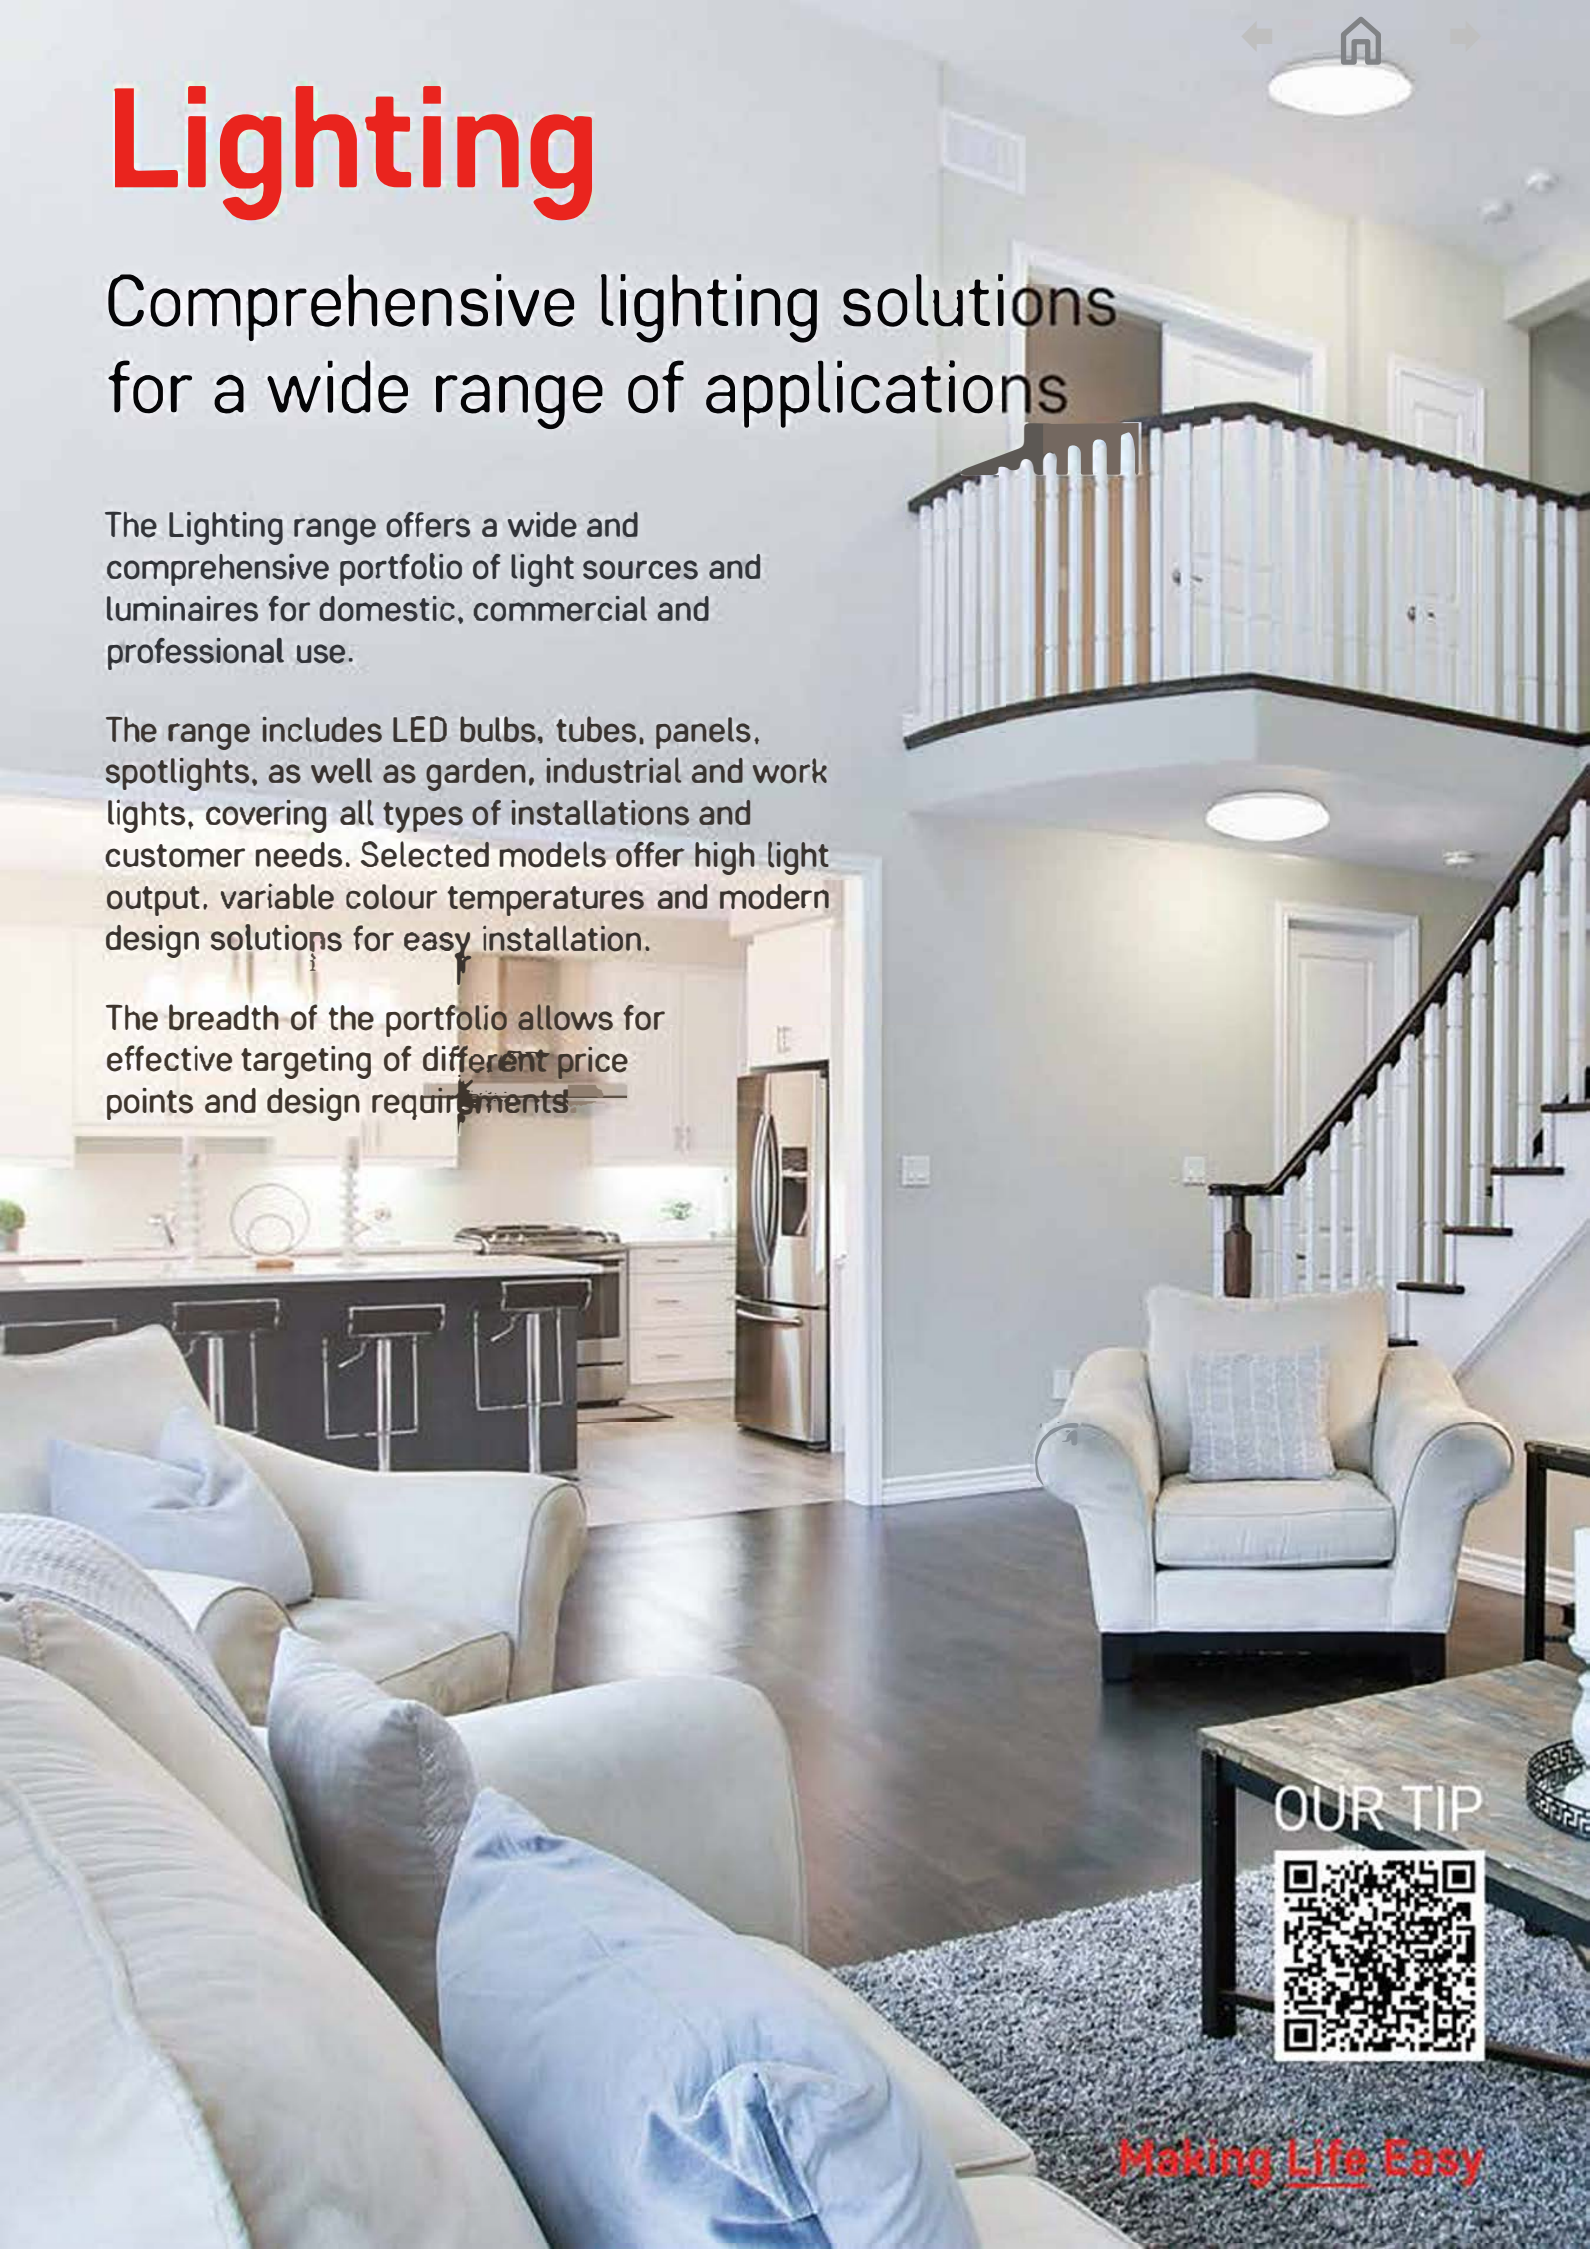

Making Life Easy



Lighting

Light sources

LED bulbs

Bulbs GoSmart

EMOS GoSmart

- remote light on/off
- brightness, light colour and chromaticity temperature control
- energy saving with automatic switch-off and dimming options
- set unique lighting scenes for different activities
- easy to install and create automations
- connection to the home network via WIFI protocol
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

UV Free | Hg Free | 100 % = 0 s | 230 V~/50 Hz

- replacement of incandescent bulb: 60 W
- dimmable
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700–6 500 K
- power: 9 W
- luminous efficacy: 90 lm/W
- colour settings (RGB)
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants

Wi Fi | E27 | 806 lm | 9 W | DIMMABLE | CCT | RGB





8 592920 120125

ZQW514R 1/-/4/24

15 20 503 500

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 050 lm
- color temperature: 2 700–6 500 K
- power: 11 W
- luminous efficacy: 95 lm/W
- colour settings (RGB)
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 60 × 60 × 125 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants

Wi Fi | E27 | 1 050 lm | 11 W | DIMMABLE | CCT | RGB





8 592920 120156

ZQW515R 1/-/4/24

15 20 503 501

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 94 W
- dimmable
- shape: A65
- luminous flux: 1 400 lm
- color temperature: 2 700–6 500 K
- power: 14 W
- luminous efficacy: 100 lm/W
- colour settings (RGB)
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 65 × 65 × 134 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants





Wi Fi | E27 | 1 400 lm | 14 W | DIMMABLE | CCT | RGB

8 592920 120187

ZQW516R 1/-/4/24

15 20 503 502

- replacement of incandescent bulb: 40 W
- dimmable
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 98 lm/W
- colour settings (RGB)
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 37 × 37 × 110 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants





Wi Fi | E14 | 470 lm | 4.8 W | DIMMABLE | CCT | RGB

8 592920 120217

ZQW322R 1/-/4/36

15 25 501 500

- replacement of incandescent bulb: 35 W
- dimmable
- shape: MR16
- luminous flux: 400 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 83 lm/W
- colour settings (RGB)
- energy efficiency class: G
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 56.5 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants





Wi Fi | GU10 | 400 lm | 4.8 W | DIMMABLE | CCT | RGB

8 592920 120248

ZQW832R 1/-/4/72

15 25 500 500

Filament

- maximum lighting efficiency with minimal energy use
- perfect replacement for traditional tungsten bulbs
- features high luminous efficacy for fast and even illumination
- available in a wide range of types and shapes
- use: lighting for modern interiors, homes and offices

R_a = 94 | UV Free | Hg Free | 230 V~/50 Hz

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120569

ZF5147 1/-/10/20

15 25 283 273

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box



E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120590

ZF5147.3 3/-/12/24

15 25 283 274

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box



E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120620

ZF5148 1/-/10/20

15 25 283 410

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box



E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120651

ZF5148.3 3/-/12/24

15 25 283 411

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box



E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120682

ZF5157 1/-/10/20

15 25 283 275

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box



E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120712

ZF5157.3 3/-/12/24

15 25 283 276

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 4 000 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120743

ZF5158 1/-/10/20

15 25 283 412

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 4 000 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box



E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120774

ZF5158.3 3/-/12/24

15 25 283 413

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 7.2 W
- luminous efficacy: 211 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 7.2 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 126103

ZF5167 1/-/10/20

15 25 283 279

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 7.2 W
- luminous efficacy: 211 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 7.2 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 126134

ZF5168 1/-/10/20

15 25 283 417

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box





E14 | 806 lm | 3.8 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 135693

ZF1A42 1/-/10/60

15 25 741 259

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box





E14 | 806 lm | 3.8 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 135723

ZF1A43

15 25 731 454

1/-/10/60

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 806 lm | 3.8 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 135631

ZF3A42

15 25 741 258

1/-/10/40

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 806 lm | 3.8 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 135662

ZF3A43

15 25 731 453

1/-/10/40

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 129715

ZF5D22

15 25 743 203

1/-/10/20

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 129746

ZF5D23

15 25 733 497

1/-/10/20

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box




E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A D

8 592920 129777

ZF5D42 1/-/10/20
15 25 743 204

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box




E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A D

8 592920 142691

ZF5D42.3 3/-/12/24
15 25 743 237

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box




E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A D

8 592920 129807

ZF5D43 1/-/10/20
15 25 733 498

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box




E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A D

8 592920 142738

ZF5D43.3 3/-/12/24
15 25 743 416

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 7.8 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box




E27 | 1 060 lm | 7.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A D

8 592920 129838

ZF5D52 1/-/10/20
15 25 743 205

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 4 000 K
- power: 7.8 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 1 060 lm | 7.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E D

8 592920 129869

ZF5D53 1/-/10/20

15 25 733 499

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7.5 W
- luminous efficacy: 141 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 106 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 7.5 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E D

8 592920 142783

ZF5D52D 1/-/10/40

15 25 743 238

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7.5 W
- luminous efficacy: 141 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 106 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 7.5 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E D

8 592920 142813

ZF5D54D 1/-/10/40

15 25 743 417

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 10.5 W
- luminous efficacy: 145 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 10.5 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E D

8 592920 129890

ZF5D62 1/-/10/20

15 25 743 206

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 10.5 W
- luminous efficacy: 145 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 10.5 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E D

8 592920 129920

ZF5D63 1/-/10/20

15 25 743 400

EMOS A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 100 W
- dimmable
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E F G D

8 592920 142844

ZF5D62D 1/-/10/20

15 25 743 239

- replacement of incandescent bulb: 100 W
- dimmable
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E F G D

8 592920 142875

ZF5D64D 1/-/10/20

15 25 743 418

- replacement of incandescent bulb: 150 W
- shape: A70
- luminous flux: 2 452 lm
- color temperature: 2 700 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 70 × 70 × 126 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E F G D

8 592920 129951

ZF5D82 1/-/10/20

15 25 743 208

- replacement of incandescent bulb: 150 W
- shape: A70
- luminous flux: 2 452 lm
- color temperature: 4 000 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 70 × 70 × 126 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E F G D

8 592920 129982

ZF5D83 1/-/10/20

15 25 743 401

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E F G D

8 592920 130223

ZF1D02 1/-/10/60

15 25 731 251

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130254

ZF1D03 1/-/10/60

15 25 731 448 SALE

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 250 lm | 1.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130407

ZF6D02 1/-/10/60

15 25 743 209

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 250 lm | 1.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130438

ZF6D03 1/-/10/60

15 25 743 402 SALE

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130285

ZF1D22 1/-/10/60

15 25 731 252

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130315

ZF1D23 1/-/10/60

15 25 731 449

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box




E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130469

ZF6D22 1/-/10/60

15 25 743 210

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box




E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130490

ZF6D23 1/-/10/60

15 25 743 403

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box




E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130346

ZF1D42 1/-/10/60

15 25 731 253

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box




E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130377

ZF1D43 1/-/10/60

15 25 731 450

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box




E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130520

ZF6D42 1/-/10/60

15 25 743 211

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130551

ZF6D43

15 25 743 404

1/-/10/60

- replacement of incandescent bulb: 75 W
- shape: Mini Globe
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box





E14 | 1 055 lm | 7 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 135815

ZF1D52

15 25 731 259

1/-/10/60

- replacement of incandescent bulb: 75 W
- shape: Mini Globe
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box





E14 | 1 055 lm | 7 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 135846

ZF1D53

15 25 731 456

1/-/10/60

- replacement of incandescent bulb: 25 W
- shape: Candle
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130018

ZF3D02

15 25 731 248

1/-/10/40

- replacement of incandescent bulb: 25 W
- shape: Candle
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130070

ZF3D03

15 25 731 445

1/-/10/40

SALE

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130100

ZF3D22 1/-/10/40

15 25 731 249

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130131

ZF3D23 1/-/10/40

15 25 731 446

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130162

ZF3D42 1/-/10/40

15 25 731 250

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130193

ZF3D43 1/-/10/40

15 25 731 447

- replacement of incandescent bulb: 75 W
- shape: Candle
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 1 055 lm | 7 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | ATG D

8 592920 135754

ZF3D52 1/-/10/40

15 25 731 258

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 75 W
- shape: Candle
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 1 055 lm | 7 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | ATG D

8 592920 135785

ZF3D53 1/-/10/40

15 25 731 455

- replacement of incandescent bulb: 100 W
- shape: G125
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130629

ZF2D62 1/-/-/6

15 25 743 213

- replacement of incandescent bulb: 100 W
- shape: G125
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130643

ZF2D63 1/-/-/6

15 25 743 406

- replacement of incandescent bulb: 150 W
- shape: G125
- luminous flux: 2 452 lm
- color temperature: 2 700 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130667

ZF2D82 1/-/-/6

15 25 743 214

SALE

- replacement of incandescent bulb: 150 W
- shape: G125
- luminous flux: 2 452 lm
- color temperature: 4 000 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | ATG D

8 592920 130681

ZF2D83 1/-/-/6

15 25 743 407

SALE

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 75 W
- shape: G95
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7.8 W
- luminous efficacy: 135 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 140 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 7.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130582

ZF2D52 1/-/-/6

15 25 743 212

- replacement of incandescent bulb: 75 W
- shape: G95
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7.8 W
- luminous efficacy: 135 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 140 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 7.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 130605

ZF2D53 1/-/-/6

15 25 743 405

- replacement of incandescent bulb: 327 W
- shape: ED90
- luminous flux: 6 000 lm
- color temperature: 4 000 K
- power: 36 W
- luminous efficacy: 167 lm/W
- energy efficiency class: C
- beam angle: 330°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 90 × 90 × 245 mm
- packaging: 1 pc, small box





E27 | 6 000 lm | 36 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G C

8 592920 131718

ZF5751 1/-/-/6

15 25 743 409

- replacement of incandescent bulb: 327 W
- shape: ED90
- luminous flux: 6 000 lm
- color temperature: 4 000 K
- power: 36 W
- luminous efficacy: 167 lm/W
- energy efficiency class: C
- beam angle: 330°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 90 × 90 × 230 mm
- packaging: 1 pc, small box





E27 | 6 000 lm | 36 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G C

8 592920 131732

ZF5754 1/-/-/6

15 25 737 401

Classic

- energy-saving LED bulbs with long lifespan
- an ideal choice with excellent price-to-performance ratio
- provides stable, flicker-free light for better focus at work
- offers pleasant lighting that is gentle on the eyes
- available in a wide range of types and shapes
- use: lighting for modern interiors, households, and offices

UV Free | Hg Free | 100 % = 0 s

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A G E

8 592920 126325

ZQ5E21 1/-/10/20

15 25 733 277 SALE

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A G E

8 592920 126356

ZQ5E23 1/-/10/20

15 25 733 470 SALE

- replacement of incandescent bulb: 50 W
- shape: A60
- luminous flux: 645 lm
- color temperature: 2 700 K
- power: 5.8 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 645 lm | 5.8 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A G E

8 592920 126387

ZQ5E31 1/-/10/20

15 25 733 278

- replacement of incandescent bulb: 50 W
- shape: A60
- luminous flux: 645 lm
- color temperature: 4 000 K
- power: 5.8 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 645 lm | 5.8 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A G E

8 592920 126417

ZQ5E33 1/-/10/20

15 25 733 471

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A G E

8 592920 126448

ZQ5E41 1/-/10/20

15 25 733 279

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 3 pcs, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A G E

8 592920 126714

ZQ5E41.3 3/-/15/30

15 25 733 282

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A G E

8 592920 126479

ZQ5E43 1/-/10/20

15 25 733 472

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 3 pcs, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A G E

8 592920 126776

ZQ5E43.3 3/-/15/30

15 25 733 475

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A G E

8 592920 126509

ZQ5E44 1/-/10/20

15 25 733 121

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 60 × 60 × 109 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 126530

ZQ5E51 1/-/10/20

15 25 733 280

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 3 pcs, small box





E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 126837

ZQ5E51.3 3/-/15/30

15 25 733 284

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 126561

ZQ5E53 1/-/10/20

15 25 733 473

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 3 pcs, small box





E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 126868

ZQ5E53.3 3/-/15/30

15 25 733 477

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 6 500 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 126592

ZQ5E54 1/-/10/20

15 25 733 122

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 10.5 W
- luminous efficacy: 101 lm/W
- energy efficiency class: F
- beam angle: 160°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 120 × 60 × 60 mm
- packaging: 1 pc, small box




E27 | 1 060 lm | 10.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | F

8 592920 143025

ZQ5F52S 1/-/10/80

15 25 743 240

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 126622

ZQ5E61 1/-/10/20

15 25 733 281

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 3 pcs, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 126899

ZQ5E61.3 3/-/15/30

15 25 733 285

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 126653

ZQ5E63 1/-/10/20

15 25 733 474

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 3 pcs, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 126929

ZQ5E63.3 3/-/15/30

15 25 733 478

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 6 500 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 126684

ZQ5E64 1/-/10/20

15 25 733 123

- replacement of incandescent bulb: 120 W
- shape: A70
- luminous flux: 1 901 lm
- color temperature: 2 700 K
- power: 16 W
- luminous efficacy: 119 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 71 × 71 × 142 mm
- packaging: 1 pc, small box





E27 | 1 901 lm | 16 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 126950

ZQ5E71 1/-/10/20

15 25 733 286 SALE

- replacement of incandescent bulb: 120 W
- shape: A70
- luminous flux: 1 901 lm
- color temperature: 4 000 K
- power: 16 W
- luminous efficacy: 119 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 71 × 71 × 140 mm
- packaging: 1 pc, small box





E27 | 1 901 lm | 16 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 126981

ZQ5E73 1/-/10/20

15 25 733 479 SALE

- replacement of incandescent bulb: 120 W
- shape: A70
- luminous flux: 1 901 lm
- color temperature: 6 500 K
- power: 16 W
- luminous efficacy: 119 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 71 × 71 × 142 mm
- packaging: 1 pc, small box





E27 | 1 901 lm | 16 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 127018

ZQ5E74 1/-/10/20

15 25 733 124 SALE

- replacement of incandescent bulb: 120 W
- shape: Classic A60
- luminous flux: 1 901 lm
- color temperature: 6 500 K
- power: 14 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box





E27 | 1 901 lm | 14 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | D

8 592920 153888

ZQ5D77 1/-/10/20

15 25 733 128

- replacement of incandescent bulb: 120 W
- shape: Classic A60
- luminous flux: 1 901 lm
- color temperature: 4 000 K
- power: 14 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box





E27 | 1 901 lm | 14 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 153826

ZQ5D76 1/-/10/20

15 25 733 501

- replacement of incandescent bulb: 120 W
- shape: Classic A60
- luminous flux: 1 901 lm
- color temperature: 2 700 K
- power: 14 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box





E27 | 1 901 lm | 14 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 153857

ZQ5D75 1/-/10/20

15 25 733 502

- replacement of incandescent bulb: 150 W
- shape: A80
- luminous flux: 2 452 lm
- color temperature: 2 700 K
- power: 20 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 80 × 156 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 20 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127049

ZQ5E81 1/-/10/20

15 25 733 287

- replacement of incandescent bulb: 150 W
- shape: A80
- luminous flux: 2 452 lm
- color temperature: 4 000 K
- power: 20 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 80 × 156 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 20 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127070

ZQ5E83 1/-/10/20

15 25 733 480

- replacement of incandescent bulb: 150 W
- shape: A80
- luminous flux: 2 452 lm
- color temperature: 6 500 K
- power: 20 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 80 × 156 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 20 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127100

ZQ5E84 1/-/10/20

15 25 733 125

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 200 W
- shape: A95
- luminous flux: 3 452 lm
- color temperature: 2 700 K
- power: 28 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 178 mm
- packaging: 1 pc, small box





E27 | 3 452 lm | 28 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A E

8 592920 130803

ZQ5E91
15 25 743 215

1/-/3/9
SALE

- replacement of incandescent bulb: 200 W
- shape: A95
- luminous flux: 3 452 lm
- color temperature: 4 000 K
- power: 28 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 178 mm
- packaging: 1 pc, small box





E27 | 3 452 lm | 28 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A E

8 592920 130834

ZQ5E93
15 25 743 408

1/-/3/9
SALE

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 2.2 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 45 × 45 × 70 mm
- packaging: 1 pc, small box





E14 | 250 lm | 2.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A E

8 592920 161067

ZQ1E01
15 25 743 247

1/-/10/40
NEW

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 2.2 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 45 × 45 × 70 mm
- packaging: 1 pc, small box





E14 | 250 lm | 2.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A E

8 592920 161098

ZQ1E03
15 25 743 439

1/-/10/40
NEW

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 2.2 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 45 × 45 × 70 mm
- packaging: 1 pc, small box





E27 | 250 lm | 2.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A E

8 592920 161128

ZQ6E01
15 25 743 248

1/-/10/40
NEW

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 2.2 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 45 × 45 × 70 mm
- packaging: 1 pc, small box





E27 | 250 lm | 2.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 161159

ZQ6E03 1/-/10/40

15 25 743 440 NEW

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 127551

ZQ1D11 1/-/10/40

15 25 731 230 SALE

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 127582

ZQ1D13 1/-/10/40

15 25 731 429 SALE

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 127827

ZQ6D11 1/-/10/40

15 25 733 272 SALE

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 127858

ZQ6D13 1/-/10/40

15 25 733 465 SALE

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127612

ZQ1E21 1/-/10/40

15 25 731 240

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 3 pcs, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127643

ZQ1E21.3 3/-/15/60

15 25 731 241

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127674

ZQ1E23 1/-/10/40

15 25 731 439

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 3 pcs, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 128060

ZQ1E23.3 3/-/15/60

15 25 731 440

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127704

ZQ1E24 1/-/10/40

15 25 731 112

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127889

ZQ6E21 1/-/10/40

15 25 733 291

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 3 pcs, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 128091

ZQ6E21.3 3/-/15/60

15 25 733 292

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127919

ZQ6E23 1/-/10/40

15 25 733 484

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 3 pcs, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 128121

ZQ6E23.3 3/-/15/60

15 25 733 485

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127940

ZQ6E24 1/-/10/40

15 25 733 126

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A G E

8 592920 127735

ZQ1E41 1/-/10/40

15 25 731 242

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A G E

8 592920 127766

ZQ1E43 1/-/10/40

15 25 731 441

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A G E

8 592920 127797

ZQ1E44 1/-/10/40

15 25 731 113

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 806 lm | 6.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A G E

8 592920 127971

ZQ6E41 1/-/10/40

15 25 733 293

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 806 lm | 6.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A G E

8 592920 128008

ZQ6E43 1/-/10/40

15 25 733 486

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 806 lm | 6.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 128039

ZQ6E44 1/-/10/40

15 25 733 127

- replacement of incandescent bulb: 25 W
- shape: Candle
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 2.2 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 37 × 37 × 93 mm
- packaging: 1 pc, small box





E14 | 250 lm | 2.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 152959

ZQ3E01 1/-/10/40

15 25 731 438

NEW

- replacement of incandescent bulb: 25 W
- shape: Candle
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 2.2 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 37 × 37 × 93 mm
- packaging: 1 pc, small box





E14 | 250 lm | 2.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 152980

ZQ3E03 1/-/10/40

15 25 731 459

NEW

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 127131

ZQ3D11 1/-/10/40

15 25 731 226

SALE

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 127162

ZQ3D13 1/-/10/40

15 25 731 425

SALE

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G D

8 592920 127377

ZQ4D11 | 1/-/10/40

15 25 733 270 | SALE

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G D

8 592920 127407

ZQ4D13 | 1/-/10/40

15 25 733 463 | SALE

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127193

ZQ3E21 | 1/-/10/40

15 25 731 236

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 3 pcs, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127490

ZQ3E21.3 | 3/-/15/90

15 25 731 237

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A T G E

8 592920 127223

ZQ3E23 | 1/-/10/40

15 25 731 435

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 3 pcs, small box



E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 127520

ZQ3E23.3 3/-/15/90

15 25 731 436

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box



E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 127254

ZQ3E24 1/-/10/40

15 25 731 110

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box



E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 127438

ZQ4E21 1/-/10/40

15 25 733 289

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box



E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 127469

ZQ4E23 1/-/10/40

15 25 733 482

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box



E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 127285

ZQ3E41 1/-/10/40

15 25 731 238

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 127315

ZQ3E43 1/-/10/40

15 25 731 437

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 127346

ZQ3E44 1/-/10/40

15 25 731 111

- replacement of incandescent bulb: 40 W
- shape: R50
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 83 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128152

ZQ7E21 1/-/10/30

15 25 731 243

- replacement of incandescent bulb: 40 W
- shape: R50
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 83 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128183

ZQ7E23 1/-/10/30

15 25 731 442

- replacement of incandescent bulb: 60 W
- shape: R63
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 63 × 63 × 97 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128213

ZQ7E41 1/-/10/20

15 25 733 294

SALE

- replacement of incandescent bulb: 60 W
- shape: R63
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 63 × 63 × 97 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128244

ZQ7E43 1/-/10/20

15 25 733 487 SALE

- replacement of incandescent bulb: 60 W
- shape: R63
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 63 × 63 × 97 mm
- packaging: 1 pc, small box





E27 | 806 lm | 5.9 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 160244

ZQ7D41 1/-/10/20

15 25 743 431 NEW

- replacement of incandescent bulb: 60 W
- shape: R63
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 63 × 63 × 97 mm
- packaging: 1 pc, small box





E27 | 806 lm | 5.9 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 160275

ZQ7D43 1/-/10/20

15 25 743 432 NEW

- replacement of incandescent bulb: 16 W
- shape: MR16
- luminous flux: 150 lm
- color temperature: 3 000 K
- power: 1.3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 150 lm | 1.3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 152157

ZQ8EL2 1/-/10/60

15 25 730 237 NEW

- replacement of incandescent bulb: 16 W
- shape: MR16
- luminous flux: 150 lm
- color temperature: 4 000 K
- power: 1.3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 150 lm | 1.3 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 152188

ZQ8EL3 1/-/10/60

15 25 730 434 NEW

- replacement of incandescent bulb: 16 W
- shape: MR16
- luminous flux: 150 lm
- color temperature: 6 500 K
- power: 1.3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 150 lm | 1.3 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 152218

ZQ8EL4 1/-/10/60

15 25 730 119 NEW

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 3 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128275

ZQ8E12 1/-/10/60

15 25 730 229

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 3 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 3 pcs, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128633

ZQ8E12.3 3/-/15/60

15 25 730 233

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 4 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128305

ZQ8E13 1/-/10/60

15 25 730 424

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 6 500 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 128336

ZQ8E14 1/-/10/60

15 25 730 114

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 3 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128510

ZQ8E17 | 1/-/10/60

15 25 730 232 | SALE

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 4 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128541

ZQ8E18 | 1/-/10/60

15 25 730 427 | SALE

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 6 500 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 128572

ZQ8E19 | 1/-/10/60

15 25 730 116 | SALE

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 3 000 K
- power: 2.5 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 2.5 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 160305

ZQ8D17 | 1/-/10/60

15 25 743 433 | NEW

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 160336

ZQ8D18 | 1/-/10/60

15 25 743 434 | NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 6 500 K
- power: 2.5 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 2.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | D

8 592920 160367

ZQ8D19
15 25 743 435

1/-/10/60
NEW

- replacement of incandescent bulb: 65 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 3 000 K
- power: 2.5 W
- luminous efficacy: 180 lm/W
- energy efficiency class: A
- beam angle: 36°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 53 mm
- packaging: 1 pc, small box





GU10 | 450 lm | 2.5 W | Dimmable | 50 000 h | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 162101

ZQ8A26N
15 25 743 441

1/-/10/60
NEW

- replacement of incandescent bulb: 65 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 180 lm/W
- energy efficiency class: A
- beam angle: 36°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 53 mm
- packaging: 1 pc, small box





GU10 | 450 lm | 2.5 W | Dimmable | 50 000 h | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 162132

ZQ8A28N
15 25 743 442

1/-/10/60
NEW

- replacement of incandescent bulb: 39 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 3 000 K
- power: 4 W
- luminous efficacy: 113 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 450 lm | 4 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128367

ZQ8E22
15 25 730 230

1/-/10/60

- replacement of incandescent bulb: 39 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 4 000 K
- power: 4 W
- luminous efficacy: 113 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 450 lm | 4 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128398

ZQ8E23
15 25 730 425

1/-/10/60

- replacement of incandescent bulb: 39 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 6 500 K
- power: 4 W
- luminous efficacy: 113 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 450 lm | 4 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 152126

ZQ8E24 | 15 25 730 118 | 1/-/10/60 | NEW

- replacement of incandescent bulb: 40 W
- shape: MR16
- luminous flux: 535 lm
- color temperature: 4 000 K
- power: 3 W
- luminous efficacy: 178 lm/W
- energy efficiency class: A
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 535 lm | 3 W | Dimmable | 50 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 129470

ZQ8338 | 15 25 730 423 | 1/-/10/60

- replacement of incandescent bulb: 75 W
- shape: MR16
- luminous flux: 565 lm
- color temperature: 3 000 K
- power: 5.8 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 36°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box





GU10 | 565 lm | 5.8 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 152331

ZQ8E32N | 15 25 730 239 | 1/-/10/60 | SALE

- replacement of incandescent bulb: 75 W
- shape: MR16
- luminous flux: 565 lm
- color temperature: 4 000 K
- power: 5.8 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 36°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box





GU10 | 565 lm | 5.8 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128602

ZQ8E33N | 15 25 730 428 | 1/-/10/60 | SALE

- replacement of incandescent bulb: 75 W
- shape: MR16
- luminous flux: 565 lm
- color temperature: 6 500 K
- power: 5.8 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 36°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box





GU10 | 565 lm | 5.8 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 152362

ZQ8E34N | 15 25 730 121 | 1/-/10/60 | SALE

- replacement of incandescent bulb: 75 W
- shape: MR16
- luminous flux: 565 lm
- color temperature: 4 000 K
- power: 4,9 W
- luminous efficacy: 115 lm/W
- energy efficiency class: D
- beam angle: 36°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box




GU10 | 565 lm | 4.9 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | ATG D

8 592920 160428

ZQ8D33N 1/-/10/60

15 25 743 436 NEW

- replacement of incandescent bulb: 75 W
- shape: MR16
- luminous flux: 565 lm
- color temperature: 3 000 K
- power: 4,9 W
- luminous efficacy: 115 lm/W
- energy efficiency class: D
- beam angle: 36°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box




GU10 | 565 lm | 4.9 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | ATG D

8 592920 160398

ZQ8D32N 1/-/10/60

15 25 743 437 NEW

- replacement of incandescent bulb: 75 W
- shape: MR16
- luminous flux: 565 lm
- color temperature: 6 500 K
- power: 4,9 W
- luminous efficacy: 115 lm/W
- energy efficiency class: D
- beam angle: 36°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box




GU10 | 565 lm | 4.9 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | ATG D

8 592920 160459

ZQ8D34N 1/-/10/60

15 25 743 438 NEW

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box




GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | ATG E

8 592920 142905

ZQ8E42D 1/-/10/60

15 25 740 236

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box




GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | ATG E

8 592920 142936

ZQ8E44D 1/-/10/60

15 25 730 431

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box




GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 143056

ZQ8E42S 1/-/10/60
15 25 740 237

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box




GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 143087

ZQ8E44S 1/-/10/60
15 25 730 432

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box




GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128428

ZQ8E42 1/-/10/60
15 25 730 225

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 3 pcs, small box




GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 128664

ZQ8E42.3 3/-/15/60
15 25 730 228

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box




GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128459

ZQ8E43 1/-/10/60
15 25 730 419

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 3 pcs, small box



GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 128695

ZQ8E43.3 3/-/15/60

15 25 730 422

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box



GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 128480

ZQ8E44 1/-/10/60

15 25 730 112

- replacement of incandescent bulb: 120 W
- shape: MR16
- luminous flux: 850 lm
- color temperature: 3 000 K
- power: 4.7 W
- luminous efficacy: 181 lm/W
- energy efficiency class: A
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box



GU10 | 850 lm | 4.7 W | Dimmable | 50 000 h | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 162163

ZQ8A46 1/-/10/60

15 25 743 443 NEW

- replacement of incandescent bulb: 120 W
- shape: MR16
- luminous flux: 850 lm
- color temperature: 4 000 K
- power: 4.7 W
- luminous efficacy: 181 lm/W
- energy efficiency class: A
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box



GU10 | 850 lm | 4.7 W | Dimmable | 50 000 h | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 162194

ZQ8A48 1/-/10/60

15 25 743 444 NEW

- replacement of incandescent bulb: 72 W
- shape: MR16
- luminous flux: 1 000 lm
- color temperature: 6 500 K
- power: 7 W
- luminous efficacy: 143 lm/W
- energy efficiency class: D
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box



GU10 | 1 000 lm | 7 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | D

8 592920 152300

ZQ8D64 1/-/10/60

15 25 730 120 NEW

- replacement of incandescent bulb: 72 W
- shape: MR16
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 143 lm/W
- energy efficiency class: D
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 1 000 lm | 7 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E.T.G. D

8 592920 152249

ZQ8D62
15 25 730 238
1/-/10/60
NEW

- replacement of incandescent bulb: 72 W
- shape: MR16
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 143 lm/W
- energy efficiency class: D
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 1 000 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E.T.G. D

8 592920 152270

ZQ8D63
15 25 730 435
1/-/10/60
NEW

- replacement of incandescent bulb: 28 W
- shape: MR16
- luminous flux: 380 lm
- color temperature: 3 000 K
- power: 4.5 W
- luminous efficacy: 84 lm/W
- energy efficiency class: F
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 12 V
- dimensions: 46 × 50 × 50 mm
- packaging: 1 pc, small box





GU5.3 | 380 lm | 4.5 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E.T.G. F

8 592920 056110

ZQ8433
15 25 732 200
1/-/10/60

- replacement of incandescent bulb: 31 W
- shape: MR16
- luminous flux: 380 lm
- color temperature: 4 000 K
- power: 4.5 W
- luminous efficacy: 84 lm/W
- energy efficiency class: F
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 12 V
- dimensions: 46 × 50 × 50 mm
- packaging: 1 pc, small box





GU5.3 | 380 lm | 4.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E.T.G. F

8 592920 056141

ZQ8434
15 25 732 400
1/-/10/60

- replacement of incandescent bulb: 22 W
- shape: JC
- luminous flux: 210 lm
- color temperature: 3 000 K
- power: 1.9 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 46 × 15 × 15 mm
- packaging: 1 pc, small box





G9 | 210 lm | 1.9 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E.T.G. E

8 592920 114490

ZQ9526
15 25 736 207
1/-/10/80

EMOS A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 22 W
- shape: JC
- luminous flux: 210 lm
- color temperature: 4 000 K
- power: 1.9 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 46 × 15 × 15 mm
- packaging: 1 pc, small box





G9 | 210 lm | 1.9 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 114520

ZQ9527 1/-/10/80

15 25 736 407

- replacement of incandescent bulb: 32 W
- shape: JC
- luminous flux: 350 lm
- color temperature: 3 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 47 × 14 × 14 mm
- packaging: 1 pc, small box





G9 | 350 lm | 2.5 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 119006

ZQ9535 1/-/10/80

15 25 736 209 SALE

- replacement of incandescent bulb: 32 W
- shape: JC
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 47 × 14 × 14 mm
- packaging: 1 pc, small box





G9 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 119037

ZQ9536 1/-/10/80

15 25 736 409 SALE

- replacement of incandescent bulb: 32 W
- shape: JC
- luminous flux: 350 lm
- color temperature: 3 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 14 × 14 × 43 mm
- packaging: 1 pc, small box





G9 | 350 lm | 2.5 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 151648

ZQ9D12 1/-/10/80

15 25 736 213

- replacement of incandescent bulb: 32 W
- shape: JC
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 14 × 14 × 43 mm
- packaging: 1 pc, small box





G9 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 151679

ZQ9D13 1/-/10/80

15 25 736 413

- replacement of incandescent bulb: 32 W
- shape: JC
- luminous flux: 350 lm
- color temperature: 6 500 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 300°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 14 × 14 × 43 mm
- packaging: 1 pc, small box





G9 | 350 lm | 2.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E.T.G. D

8 592920 151709

ZQ9D14
15 25 736 101

1/-/10/80
NEW

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 52 × 19 × 19 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E.T.G. E

8 592920 119068

ZQ9544
15 25 736 210

1/-/10/80
SALE

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 52 × 19 × 19 mm
- packaging: 2 pcs, small box





G9 | 470 lm | 4 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E.T.G. E

8 592920 119129

ZQ9544.2
15 25 736 208

2/-/20/160
SALE

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 52 × 19 × 19 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E.T.G. E

8 592920 119099

ZQ9545
15 25 736 410

1/-/10/80
SALE

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 52 × 19 × 19 mm
- packaging: 2 pcs, small box





G9 | 470 lm | 4 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E.T.G. E

8 592920 119150

ZQ9545.2
15 25 736 408

2/-/20/160
SALE

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 18 × 18 × 49 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4.2 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 151730

ZQ9E22
15 25 736 214

1/-/10/80

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 18 × 18 × 49 mm
- packaging: 2 pcs, small box





G9 | 470 lm | 4.2 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 151839

ZQ9E22.2
15 25 736 215

2/-/20/160

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 18 × 18 × 49 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 151761

ZQ9E23
15 25 736 414

1/-/10/80

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 18 × 18 × 49 mm
- packaging: 2 pcs, small box





G9 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 151860

ZQ9E23.2
15 25 736 415

2/-/20/160

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 18 × 18 × 49 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 151792

ZQ9E24
15 25 736 102

1/-/10/80

NEW

EMOS A brand of Legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 18 × 18 × 49 mm
- packaging: 2 pcs, small box





G9 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | E

8 592920 151891

ZQ9E24.2
15 25 736 103

2/-/20/160

NEW

- replacement of incandescent bulb: 40 W
- dimmable
- shape: JC
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4 W | Dimmable | 25 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | E

8 592920 142967

ZQ9E22D
15 25 736 212

1/-/10/80

- replacement of incandescent bulb: 40 W
- dimmable
- shape: JC
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4 W | Dimmable | 25 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | E

8 592920 142998

ZQ9E24D
15 25 736 412

1/-/10/80

- replacement of incandescent bulb: 48 W
- shape: JC
- luminous flux: 600 lm
- color temperature: 3 000 K
- power: 4,3 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box





G9 | 600 lm | 4.3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 150597

ZQ9D32
15 25 766 201

1/-/10/80

- replacement of incandescent bulb: 48 W
- shape: JC
- luminous flux: 600 lm
- color temperature: 4 000 K
- power: 4,3 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box





G9 | 600 lm | 4.3 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 150627

ZQ9D33
15 25 766 202

1/-/10/80

- replacement of incandescent bulb: 48 W
- shape: JC
- luminous flux: 600 lm
- color temperature: 6 500 K
- power: 4,3 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box







8 592920 150658

ZQ9D34 1/-/10/80

15 25 766 203

- replacement of incandescent bulb: 60 W
- shape: JC
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 4,9 W
- luminous efficacy: 164 lm/W
- energy efficiency class: C
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box







8 592920 150689

ZQ9C42 1/-/10/80

15 25 766 204

- replacement of incandescent bulb: 60 W
- shape: JC
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 4,9 W
- luminous efficacy: 164 lm/W
- energy efficiency class: C
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box







8 592920 150719

ZQ9C43 1/-/10/80

15 25 766 205

- replacement of incandescent bulb: 60 W
- shape: JC
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 4,9 W
- luminous efficacy: 164 lm/W
- energy efficiency class: C
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box







8 592920 150740

ZQ9C44 1/-/10/80

15 25 766 206

- replacement of incandescent bulb: 21 W
- shape: JC
- luminous flux: 200 lm
- color temperature: 3 000 K
- power: 1.9 W
- luminous efficacy: 105 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 12 V
- dimensions: 36 × 10 × 10 mm
- packaging: 1 pc, small box







8 592920 046661

ZQ8620 1/-/10/60

15 25 735 201

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 21 W
- shape: JC
- luminous flux: 200 lm
- color temperature: 3 000 K
- power: 1.9 W
- luminous efficacy: 105 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 12 V
- dimensions: 36 × 10 × 10 mm
- packaging: 2 pcs, small box







8 592920 122983

ZQ8620.2 2/-/20/120

15 25 735 202

- replacement of incandescent bulb: 21 W
- shape: JC
- luminous flux: 200 lm
- color temperature: 4 000 K
- power: 1.9 W
- luminous efficacy: 105 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 12 V
- dimensions: 36 × 10 × 10 mm
- packaging: 1 pc, small box







8 592920 046692

ZQ8621 1/-/10/60

15 25 735 401

- replacement of incandescent bulb: 21 W
- shape: JC
- luminous flux: 200 lm
- color temperature: 4 000 K
- power: 1.9 W
- luminous efficacy: 105 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 12 V
- dimensions: 36 × 10 × 10 mm
- packaging: 2 pcs, small box







8 592920 123010

ZQ8621.2 2/-/20/120

15 25 735 402

Basic

- lighting solution with optimal quality at the best price
- available in a wide range of types and shapes
- use: lighting for modern interiors, households, representative spaces, offices and stores



- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box







8 592920 143988

ZL5F47 1/-/10/30

15 25 743 241

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 3 pcs, small box



E27 | 806 lm | 8.8 W | Dimmable

3 000 K WARM WHITE | A F

8 592920 144015

ZL5F47.3 3/-/-/45

15 25 743 244

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 6 pcs, small box



E27 | 806 lm | 8.8 W | Dimmable

3 000 K WARM WHITE | A F

8 592920 144039

ZL5F47.6 6/-/-/48

15 25 743 245

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box



E27 | 806 lm | 8.8 W | Dimmable

4 000 K NEUTRAL WHITE | A F

8 592920 144053

ZL5F48 1/-/10/30

15 25 743 419

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 3 pcs, small box



E27 | 806 lm | 8.8 W | Dimmable

4 000 K NEUTRAL WHITE | A F

8 592920 144084

ZL5F48.3 3/-/-/45

15 25 743 422

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 6 pcs, small box



E27 | 806 lm | 8.8 W | Dimmable

4 000 K NEUTRAL WHITE | A F

8 592920 144107

ZL5F48.6 6/-/-/48

15 25 743 423

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 3 000 K
- power: 11 W
- luminous efficacy: 96 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box






8 592920 144121

ZL5F57 1/-/10/30

15 25 743 242

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 11 W
- luminous efficacy: 96 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box






8 592920 144152


ZL5F58 1/-/10/30

15 25 743 420

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 3 000 K
- power: 15.3 W
- luminous efficacy: 99 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 (max.) mm
- packaging: 1 pc, small box



8 592920 144183

ZL5F67 1/-/10/30

15 25 743 243

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 15.3 W
- luminous efficacy: 99 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 (max.) mm
- packaging: 1 pc, small box






8 592920 144213


ZL5F68 1/-/10/30

15 25 743 421

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box



8 592920 134450

ZL1F22 1/-/10/60

15 25 731 246

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 40 × 40 × 82 mm
- packaging: 1 pc, small box





E14 | 470 lm | 5.5 W | Dimmable

4 000 K NEUTRAL WHITE | A T G F

8 592920 134726

ZL1F23 1/-/10/60

15 25 741 451

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box





E27 | 470 lm | 5.5 W | Dimmable

3 000 K WARM WHITE | A T G F

8 592920 134481

ZL6F22 1/-/10/60

15 25 743 202

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E27 | 470 lm | 5.5 W | Dimmable

4 000 K NEUTRAL WHITE | A T G F

8 592920 134757

ZL6F23 1/-/10/60

15 25 731 451

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box





E14 | 806 lm | 8.8 W | Dimmable

3 000 K WARM WHITE | A T G F

8 592920 144305

ZL1F47 1/-/10/60

15 25 731 262

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 8.8 W
- luminous efficacy: 92 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box





E14 | 806 lm | 8.8 W | Dimmable

4 000 K NEUTRAL WHITE | A T G F

8 592920 144336

ZL1F48 1/-/10/60

15 25 731 458

			Order Code Item Number	Packaging Type
▪ replacement of incandescent bulb: 40 W ▪ shape: Candle ▪ luminous flux: 470 lm ▪ color temperature: 3 000 K ▪ power: 5.5 W ▪ luminous efficacy: 85 lm/W ▪ energy efficiency class: F ▪ beam angle: 180° ▪ color rendering index (CRI): Ra >80	▪ voltage: 230 V~/50 Hz ▪ dimensions: 35 × 35 × 105 (max.) mm ▪ packaging: 1 pc, small box	 	**ZL3F22** 15 25 731 244	1/-/10/60
▪ replacement of incandescent bulb: 40 W ▪ shape: Candle ▪ luminous flux: 470 lm ▪ color temperature: 4 000 K ▪ power: 5.5 W ▪ luminous efficacy: 85 lm/W ▪ energy efficiency class: F ▪ beam angle: 180° ▪ color rendering index (CRI): Ra >80	▪ voltage: 230 V~/50 Hz ▪ dimensions: 35 × 35 × 110 mm ▪ packaging: 1 pc, small box	 	**ZL3F23** 15 25 731 452	1/-/10/60
▪ replacement of incandescent bulb: 40 W ▪ shape: Candle ▪ luminous flux: 470 lm ▪ color temperature: 3 000 K ▪ power: 5.5 W ▪ luminous efficacy: 85 lm/W ▪ energy efficiency class: F ▪ beam angle: 180° ▪ color rendering index (CRI): Ra >80	▪ voltage: 230 V~/50 Hz ▪ dimensions: 35 × 35 × 105 (max.) mm ▪ packaging: 1 pc, small box	 	**ZL4F22** 15 25 743 201	1/-/10/60 SALE
▪ replacement of incandescent bulb: 60 W ▪ shape: Candle ▪ luminous flux: 806 lm ▪ color temperature: 3 000 K ▪ power: 8.8 W ▪ luminous efficacy: 92 lm/W ▪ energy efficiency class: F ▪ beam angle: 180° ▪ color rendering index (CRI): Ra >80	▪ voltage: 230 V~/50 Hz ▪ dimensions: 35 × 35 × 110 (max.) mm ▪ packaging: 1 pc, small box	 	**ZL3F47** 15 25 731 261	1/-/10/60
▪ replacement of incandescent bulb: 60 W ▪ shape: Candle ▪ luminous flux: 806 lm ▪ color temperature: 4 000 K ▪ power: 8.8 W ▪ luminous efficacy: 92 lm/W ▪ energy efficiency class: F ▪ beam angle: 180° ▪ color rendering index (CRI): Ra >80	▪ voltage: 230 V~/50 Hz ▪ dimensions: 35 × 35 × 110 (max.) mm ▪ packaging: 1 pc, small box	 	**ZL3F48** 15 25 731 457	1/-/10/60

EMOS A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 25 W
- shape: MR16
- luminous flux: 250 lm
- color temperature: 3 000 K
- power: 2.9 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 250 lm | 2.9 W | Dimmable | 3 000 K WARM WHITE | A–G F

8 592920 134573

ZL8F02 1/-/10/90

15 25 730 234

- replacement of incandescent bulb: 25 W
- shape: MR16
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 2.9 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 250 lm | 2.9 W | Dimmable | 4 000 K NEUTRAL WHITE | A–G F

8 592920 134603

ZL8F03 1/-/10/90

15 25 730 429

- replacement of incandescent bulb: 40 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 3 000 K
- power: 5.2 W
- luminous efficacy: 87 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 450 lm | 5.2 W | Dimmable | 3 000 K WARM WHITE | A–G F

8 592920 134634

ZL8F22 1/-/10/90

15 25 730 235

- replacement of incandescent bulb: 40 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 4 000 K
- power: 5.2 W
- luminous efficacy: 87 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 450 lm | 5.2 W | Dimmable | 4 000 K NEUTRAL WHITE | A–G F

8 592920 134665

ZL8F23 1/-/10/90

15 25 730 430

- replacement of incandescent bulb: 72 W
- shape: MR16
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- power: 10 W
- luminous efficacy: 100 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 1 000 lm | 10 W | Dimmable | 20 000 h | 3 000 K WARM WHITE | A–G F

8 592920 152393

ZL8F52 1/-/10/90

15 25 730 236

NEW

- replacement of incandescent bulb: 72 W
- shape: MR16
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- power: 10 W
- luminous efficacy: 100 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 1 000 lm | 10 W | Dimmable | 20 000 h | 4 000 K NEUTRAL WHITE | A F G

8 592920 152423

ZL8F53 15 25 730 433 — 1/-/10/90 — NEW

- replacement of incandescent bulb: 72 W
- shape: MR16
- luminous flux: 1 000 lm
- color temperature: 6 500 K
- power: 10 W
- luminous efficacy: 100 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 1 000 lm | 10 W | Dimmable | 20 000 h | 6 500 K COOL WHITE | A F G

8 592920 152454

ZL8F54 15 25 730 117 — 1/-/10/90 — NEW

Deco

- perfect visual alternative to traditional tungsten bulbs
- creates a cozy atmosphere with warm, candle-like light
- suitable for modern and retro fixtures, e.g., with visible bulbs
- available in various types, shapes, and design styles
- use: lighting for modern interiors, households, representative spaces, offices and stores

UV Free | Hg Free | 1 800 K FLAME

- replacement of incandescent bulb: 20 W
- shape: Candle
- luminous flux: 225 lm
- color temperature: 2 200 K
- power: 2.5 W
- luminous efficacy: 90 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 225 lm | 2.5 W | Dimmable | 25 000 h | 2 200 K VINTAGE | 3 YEARS WARRANTY | A F G

8 592920 133828

Z53012 15 25 743 228 — 1/-/10/40

- replacement of incandescent bulb: 40 W
- shape: ST64
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 64 × 64 × 140 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | Dimmable | 25 000 h | 2 200 K VINTAGE | 3 YEARS WARRANTY | A F G

8 592920 133859

Z57032 15 25 743 224 — 1/-/10/20

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- shape: G125
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | Dimmable | 25 000 h | 2 200 K VINTAGE | 3 YEARS WARRANTY | F

8 592920 133880

Z58032 1/-/-/6

15 25 743 225

- replacement of incandescent bulb: 40 W
- shape: G95
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 140 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | Dimmable | 25 000 h | 2 200 K VINTAGE | 3 YEARS WARRANTY | F

8 592920 133903

Z52032 1/-/-/6

15 25 743 226

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | Dimmable | 25 000 h | 2 200 K VINTAGE | 3 YEARS WARRANTY | F

8 592920 133927

Z55032 1/-/10/20

15 25 743 227

- replacement of incandescent bulb: 19 W
- shape: A60
- luminous flux: 180 lm
- color temperature: 1 800 K
- power: 4.5 W
- luminous efficacy: 40 lm/W
- energy efficiency class: G
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 106 mm
- packaging: 1 pc, small box





E27 | 180 lm | 4.5 W | Dimmable | 25 000 h | G

8 592920 149003

Z55311 1/-/10/40

15 25 813 206

- replacement of incandescent bulb: 19 W
- shape: ST64
- luminous flux: 180 lm
- color temperature: 1 800 K
- power: 4.5 W
- luminous efficacy: 40 lm/W
- energy efficiency class: G
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 64 × 64 × 140 mm
- packaging: 1 pc, small box





E27 | 180 lm | 4.5 W | Dimmable | 25 000 h | G

8 592920 149034

Z57311 1/-/10/30

15 25 813 207

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 19 W
- shape: G95
- luminous flux: 180 lm
- color temperature: 1 800 K
- power: 4.5 W
- luminous efficacy: 40 lm/W
- energy efficiency class: G
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 140 mm
- packaging: 1 pc, small box





E27 | 180 lm | 4.5 W | Dimmable | 25 000 h | A G

8 592920 149065

Z52311 1/-/-/10

15 25 813 208

- replacement of incandescent bulb: 19 W
- shape: G125
- luminous flux: 180 lm
- color temperature: 1 800 K
- power: 4.5 W
- luminous efficacy: 40 lm/W
- energy efficiency class: G
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 180 lm | 4.5 W | Dimmable | 25 000 h | A G

8 592920 149089

Z58311 1/-/-/8

15 25 813 209

- replacement of incandescent bulb: 11 W
- shape: T30
- luminous flux: 100 lm
- color temperature: 1 800 K
- power: 2 W
- luminous efficacy: 50 lm/W
- energy efficiency class: G
- beam angle: 330°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 30 × 30 × 187 mm
- packaging: 1 pc, small box





E27 | 100 lm | 2 W | Dimmable | 25 000 h | A G

8 592920 148662

Z5AI01 1/-/10/50

15 25 813 202

- replacement of incandescent bulb: 14 W
- shape: S123
- luminous flux: 130 lm
- color temperature: 1 800 K
- power: 3.5 W
- luminous efficacy: 37 lm/W
- energy efficiency class: G
- beam angle: 330°
- color rendering index (CRI): Ra >80

- voltage: 220-240 V~
- dimensions: 123 × 123 × 163 mm
- packaging: 1 pc, small box





E27 | 130 lm | 3.5 W | Dimmable | 25 000 h | A G

8 592920 148624

Z59D01 1/-/-/8

15 25 813 200

- replacement of incandescent bulb: 16 W
- shape: S123
- luminous flux: 150 lm
- color temperature: 1 800 K
- power: 4 W
- luminous efficacy: 38 lm/W
- energy efficiency class: G
- beam angle: 330°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 123 × 123 × 163 mm
- packaging: 1 pc, small box





E27 | 150 lm | 4 W | Dimmable | 25 000 h | A G

8 592920 148730

Z59G01 1/-/-/8

15 25 813 205

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 22 W
- shape: G130SRA
- luminous flux: 220 lm
- color temperature: 1 800 K
- power: 4 W
- luminous efficacy: 55 lm/W
- energy efficiency class: G
- beam angle: 330°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 130 × 130 × 164 mm
- packaging: 1 pc, small box







8 592920 148716

Z5CS11
15 25 813 204

1/-/-/8

- replacement of incandescent bulb: 24 W
- shape: CG125A
- luminous flux: 240 lm
- color temperature: 1 800 K
- power: 4.5 W
- luminous efficacy: 53 lm/W
- energy efficiency class: G
- beam angle: 330°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 164 mm
- packaging: 1 pc, small box







8 592920 148648

Z50B11
15 25 813 201

1/-/-/8

Light sources

Light bulbs for electrical appliances

- available in energy-saving LED and traditional bulb options
- shaped to fit various household appliances
- oven bulb withstands temperatures up to 300 °C
- use: lighting for kitchen appliances



- replacement of incandescent bulb: 25 W
- shape: ST26
- luminous flux: 255 lm
- color temperature: 4 000 K
- power: 2.3 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 220-240 V~
- dimensions: 25 × 25 × 58 mm
- packaging: 1 pc, small box







8 592920 150221

Z6923
15 24 014 023

1/-/10/80

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 465 lm
- color temperature: 3 000 K
- power: 4.5 W
- luminous efficacy: 103 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 58 × 20 × 20 mm
- packaging: 1 pc, small box







8 592920 068359

ZQ9140

15 25 731 208

1/-/10/60

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 465 lm
- color temperature: 4 000 K
- power: 4.5 W
- luminous efficacy: 103 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 58 × 20 × 20 mm
- packaging: 1 pc, small box







8 592920 068380

ZQ9141

15 25 731 407

1/-/10/60

- type: special lamp for oven
- voltage: 230 V
- power: 15 W
- color temperature: 300 °C
- socket (bulb holder): E14
- luminous flux: 58 lm
- packaging: 1 pc, box
- dimensions: 22 × 49 mm







8 592920 149263

Z6915

15 24 115 012

1/-/10/300

- type: fume hood bulb
- voltage: 230 V
- power: 40 W
- socket (bulb holder): E14
- luminous flux: 400 lm
- packaging: 1 pc, box
- dimensions: 25 × 82 mm







8 595209 900944

C5109

31 32 510 900

1/-/-/100

ECO halogen

- energy-saving replacement for halogen reflector lights
- excellent luminous efficacy, energy saving and long lifespan
- selected models with dimming capability
- use: lighting for indoor and outdoor spaces

- replacement of incandescent bulb: 94 W
- dimmable
- shape: J78
- luminous flux: 1 400 lm
- color temperature: 3 000 K
- power: 80 W
- luminous efficacy: 18 lm/W
- energy efficiency class: G
- beam angle: 360°
- color rendering index (CRI): Ra >99
- voltage: 230 V~/50 Hz
- dimensions: 8 × 78 × 8 mm
- packaging: 1 pc, small box





8 595025 370891

ZE0101 1/10/50/300

15 27 000 800

- replacement of incandescent bulb: 139 W
- dimmable
- shape: J78
- luminous flux: 2 250 lm
- color temperature: 3 000 K
- power: 120 W
- luminous efficacy: 19 lm/W
- energy efficiency class: G
- beam angle: 360°
- color rendering index (CRI): Ra >99
- voltage: 230 V~/50 Hz
- dimensions: 8 × 78 × 8 mm
- packaging: 1 pc, small box





8 595025 370921

ZE0102 1/10/50/300

15 27 001 200

- replacement of incandescent bulb: 161 W
- dimmable
- shape: J118
- luminous flux: 2 680 lm
- color temperature: 3 000 K
- power: 140 W
- luminous efficacy: 19 lm/W
- energy efficiency class: G
- beam angle: 360°
- color rendering index (CRI): Ra >99
- voltage: 230 V~/50 Hz
- dimensions: 10 × 118 × 10 mm
- packaging: 1 pc, small box





8 592920 104026

ZE0203 1/10/50/150

15 27 101 400

- replacement of incandescent bulb: 22 W
- dimmable
- shape: JC
- luminous flux: 220 lm
- color temperature: 2 700 K
- power: 14 W
- luminous efficacy: 11 lm/W
- energy efficiency class: G
- beam angle: 270°
- color rendering index (CRI): 99.9
- voltage: 12 V
- dimensions: 33 × 9 × 9 mm
- packaging: 1 pc, small box





8 592920 150399

ZE0505A 1/10/100/800

15 28 001 402

- replacement of incandescent bulb: 26 W
- dimmable
- shape: JC
- luminous flux: 260 lm
- color temperature: 2 700 K
- power: 25 W
- luminous efficacy: 10 lm/W
- energy efficiency class: G
- beam angle: 270°

- color rendering index (CRI): 99.9
- voltage: 230 V~/50 Hz
- dimensions: 40 × 14 × 14 mm
- packaging: 1 pc, small box









8 592920 149447

ZE0304

15 28 020 000

1/10/100/800

- replacement of incandescent bulb: 31 W
- dimmable
- shape: JC
- luminous flux: 340 lm
- color temperature: 2 700 K
- power: 30 W
- luminous efficacy: 11 lm/W
- energy efficiency class: G
- beam angle: 270°

- color rendering index (CRI): 99.9
- voltage: 230 V~/50 Hz
- dimensions: 40 × 14 × 14 mm
- packaging: 1 pc, small box









8 592920 149478

ZE0305

15 28 021 000

1/10/100/800

- replacement of incandescent bulb: 47 W
- dimmable
- shape: JC
- luminous flux: 580 lm
- color temperature: 2 700 K
- power: 42 W
- luminous efficacy: 13 lm/W
- energy efficiency class: G
- beam angle: 270°

- color rendering index (CRI): 99.9
- voltage: 220-240 V~
- dimensions: 40 × 14 × 14 mm
- packaging: 1 pc, small box









8 592920 149508

ZE0306

15 28 022 000

1/10/100/800

Light sources

LED tubes, tubes

PROFI PLUS

- designed as a professional replacement for fluorescent tubes
- features excellent luminous efficacy and high energy savings
- offers extended lifespan and a 5-year warranty
- use: administrative and industrial spaces

- shape: T8
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- power: 6.5 W
- luminous efficacy: 169 lm/W
- energy efficiency class: C
- beam angle: 250°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 603 × 27 × 27 mm
- packaging: 10 pcs, small box



G13 | 1 100 lm | 6.5 W | 50 000 h

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A to G: C

8 592920 150337

Z73217 | 10/-/-/10

15 35 253 000

- shape: T8
- luminous flux: 1 100 lm
- color temperature: 6 500 K
- power: 6.5 W
- luminous efficacy: 169 lm/W
- energy efficiency class: C
- beam angle: 250°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 603 × 27 × 27 mm
- packaging: 10 pcs, small box



G13 | 1 100 lm | 6.5 W | 50 000 h

6 500 K COOL WHITE | 5 YEARS WARRANTY | A to G: C

8 592920 150344

Z73218 | 10/-/-/10

15 35 254 000

- shape: T8
- luminous flux: 1 100 lm
- color temperature: 6 500 K
- power: 7.3 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 603 × 27 mm
- packaging: 10 pcs, small box



G13 | 1 100 lm | 7.3 W | 50 000 h

6 500 K COOL WHITE | 5 YEARS WARRANTY | A to G: D

8 592920 104200

Z73216 | 10/-/-/10

15 35 236 000

SALE

- shape: T8
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- power: 7.3 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 603 × 27 mm
- packaging: 10 pcs, small box



G13 | 1 100 lm | 7.3 W | 50 000 h | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A T G D

8 592920 104187

Z73215 | 10/-/-/10

15 35 235 000 | SALE

- shape: T8
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- power: 14 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1213 × 27 mm
- packaging: 10 pcs, small box



G13 | 2 100 lm | 14 W | 50 000 h | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A T G D

8 592920 104224

Z73225 | 10/-/-/10

15 35 237 000 | SALE

- shape: T8
- luminous flux: 2 100 lm
- color temperature: 6 500 K
- power: 14 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1213 × 27 mm
- packaging: 10 pcs, small box



G13 | 2 100 lm | 14 W | 50 000 h | 6 500 K COOL WHITE | 5 YEARS WARRANTY | A T G D

8 592920 104248

Z73226 | 10/-/-/10

15 35 238 000 | SALE

- shape: T8
- luminous flux: 2 550 lm
- color temperature: 4 000 K
- power: 15 W
- luminous efficacy: 170 lm/W
- energy efficiency class: C
- beam angle: 250°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 213 × 27 × 27 mm
- packaging: 10 pcs, small box



G13 | 2 550 lm | 15 W | 50 000 h | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A T G C

8 592920 150351

Z73227 | 10/-/-/10

15 35 255 000

- shape: T8
- luminous flux: 2 550 lm
- color temperature: 6 500 K
- power: 15 W
- luminous efficacy: 170 lm/W
- energy efficiency class: C
- beam angle: 250°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 213 × 27 × 27 mm
- packaging: 10 pcs, small box



G13 | 2 550 lm | 15 W | 50 000 h | 6 500 K COOL WHITE | 5 YEARS WARRANTY | A T G C

8 592920 150368

Z73228 | 10/-/-/10

15 35 256 000

EMOS A brand of Legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- shape: T8
- luminous flux: 3 100 lm
- color temperature: 4 000 K
- power: 20.6 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1514 × 27 mm
- packaging: 10 pcs, small box







8 592920 104262

Z73235 | 10/-/-/10

15 35 239 000 | SALE

- shape: T8
- luminous flux: 3 100 lm
- color temperature: 6 500 K
- power: 20.6 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1514 × 27 mm
- packaging: 10 pcs, small box







8 592920 104286

Z73236 | 10/-/-/10

15 35 240 000 | SALE

- shape: T8
- luminous flux: 4 050 lm
- color temperature: 4 000 K
- power: 24 W
- luminous efficacy: 169 lm/W
- energy efficiency class: C
- beam angle: 250°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 514 × 27 × 27 mm
- packaging: 10 pcs, small box







8 592920 150375

Z73237 | 10/-/-/10

15 35 257 000

- shape: T8
- luminous flux: 4 050 lm
- color temperature: 6 500 K
- power: 24 W
- luminous efficacy: 169 lm/W
- energy efficiency class: C
- beam angle: 250°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 514 × 27 × 27 mm
- packaging: 10 pcs, small box







8 592920 150382

Z73238 | 10/-/-/10

15 35 258 000

BASIC

- designed to replace standard fluorescent tubes
- features excellent luminous efficacy
- offers a great price-to-quality ratio
- use: administrative and industrial spaces

- shape: T8
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- power: 9 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 600 × 26 × 26 mm
- packaging: 25 pc, small box







8 592920 139585

Z73115 25/-/-/25

15 35 247 000

- shape: T8
- luminous flux: 1 000 lm
- color temperature: 6 500 K
- power: 9 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 600 × 26 × 26 mm
- packaging: 25 pc, small box







8 592920 139622

Z73116 25/-/-/25

15 35 248 000

- shape: T8
- luminous flux: 1 980 lm
- color temperature: 4 000 K
- power: 18 W
- luminous efficacy: 110 lm/W
- energy efficiency class: E
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 200 × 26 × 26 mm
- packaging: 25 pc, small box







8 592920 139646

Z73125 25/-/-/25

15 35 249 000

- shape: T8
- luminous flux: 1 980 lm
- color temperature: 6 500 K
- power: 18 W
- luminous efficacy: 110 lm/W
- energy efficiency class: E
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 200 × 26 × 26 mm
- packaging: 25 pc, small box







8 592920 139660

Z73126 25/-/-/25

15 35 250 000

- shape: T8
- luminous flux: 2 640 lm
- color temperature: 4 000 K
- power: 24 W
- luminous efficacy: 110 lm/W
- energy efficiency class: E
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 500 × 26 × 26 mm
- packaging: 25 pc, small box







8 592920 139684

Z73135 25/-/-/25

15 35 251 000

- shape: T8
- luminous flux: 2 640 lm
- color temperature: 6 500 K
- power: 24 W
- luminous efficacy: 110 lm/W
- energy efficiency class: E
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 500 × 26 × 26 mm
- packaging: 25 pc, small box







8 592920 139707

Z73136 25/-/-/25

15 35 252 000

Light sources

Car-light bulbs

- premium OSRAM LED car bulbs for front headlights
- available in various socket types for every driver
- up to 150% brighter light than the minimum legal requirement
- up to 150 m longer beam distance than competing brands
- 20% whiter light for better visibility and a more stylish look

C2608.1 2/-/-/10

31 32 260 813

4 062172 388108



- international marking: H1
- use for: front headlamp
- packaging: 2 pcs, small plastic box

C3605.4 2/-/-/10

31 32 360 540

4 062172 387590



- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small plastic box

C3606.3 2/-/-/10

31 32 360 630

4 062172 387477



- international marking: H4
- use for: front headlamp
- packaging: 1 pc, small box

C3607.7 2/-/-/10

31 32 360 770

4 062172 387576



- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small plastic box

C3607.8 2/-/-/10

31 32 360 780

4 062172 387453



- international marking: H4
- use for: front headlamp
- packaging: 2 pcs, small plastic box

C3608.4 2/-/-/10

31 32 360 840

4 062172 387538



- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small box

C3608.5 2/-/-/10

31 32 360 850

4 062172 387415



- international marking: H4
- use for: front headlamp
- packaging: 2 pcs, small plastic box

C2611.4 2/-/-/10

31 32 260 802

4 062172 399555



- international marking: H4
- use for: front headlamp
- packaging: 2 pcs, small plastic box

C2611.5 2/-/-/10

31 32 260 812

4 062172 399579



- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small plastic box

C3613.3 2/-/-/10

31 32 361 330

4 062172 401210



- international marking: P21W
- use for: auxiliary headlight
- packaging: 2 pcs, small plastic box

C3613.2 1/-/-/5

31 32 361 320

4 062172 401159



- international marking: H4
- use for: auxiliary headlight
- packaging: 1 pc, small box

C3613.1 2/-/-/20

31 32 361 310

4 062172 401258



- international marking: W5W
- use for: registration plate, parking lights
- packaging: 2 pcs, small box

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

C2454.3 1/-/-/10

31 32 245 430

4 062172 395014



- international marking: H7
- use for: front headlamp
- packaging: 1 pc, blister

C3454.1 1/-/-/10

31 32 345 410

4 062172 395601



- international marking: H4
- use for: front headlamp
- packaging: 1 pc, small box

C3101.2 2/-/-/10

31 32 310 120

4 062172 387613



- international marking: H7
- use for: main headlight
- packaging: 1 pc, small box

Luminaires

Highbays

PROFI PLUS

ASTER

PROFI PLUS

- offers professional performance and high-quality lighting
- equipped with branded Osram LED chips for high luminosity, efficiency, and long lifespan
- dimmable with compatible accessories
- IP65 guarantees resistance to water and dust
- 5-year warranty
- use: professional industrial installations in high-clearance warehouses, production halls, etc.

- power: 100 W
- luminous flux: 18 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 60°
- dimensions: 265 × 163 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box







8 592920 124413

ZU310.6 1/-/-/1

15 46 139 000

SALE

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 100 W
- luminous flux: 18 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 90°
- dimensions: 265 × 163 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 18 000 lm | IP65 | IK08 | 90° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124406

ZU310.9
15 46 139 100

1/-/-/1

- power: 100 W
- luminous flux: 18 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 265 × 163 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 18 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124390

ZU310.12
15 46 139 200

1/-/-/1

- power: 150 W
- luminous flux: 27 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 60°
- dimensions: 300 × 173 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 27 000 lm | IP65 | IK08 | 60° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124444

ZU315.6
15 46 139 300

1/-/-/1

SALE

- power: 150 W
- luminous flux: 27 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 90°
- dimensions: 300 × 173 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 27 000 lm | IP65 | IK08 | 90° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124437

ZU315.9
15 46 139 400

1/-/-/1

- power: 150 W
- luminous flux: 27 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 300 × 173 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 27 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124420

ZU315.12
15 46 139 500

1/-/-/1

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 200 W
- luminous flux: 36 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 60°
- dimensions: 340 × 178 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 36 000 lm | IP65 | IK08 | 60° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124451

ZU320.6
15 46 139 600

1/-/-/1
SALE

- power: 200 W
- luminous flux: 36 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 90°
- dimensions: 340 × 178 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 36 000 lm | IP65 | IK08 | 90° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124468

ZU320.9
15 46 139 700

1/-/-/1

- power: 200 W
- luminous flux: 36 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 340 × 178 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 36 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124475

ZU320.12
15 46 139 800

1/-/-/1

Luminaires

Highbays

CLASSIC

CIRUS

CLASSIC

- LED technology with luminous efficacy of up to 130 lm/W
- good balance between performance and energy consumption
- IP65 rating guarantees protection against water and dust
- 3-year warranty
- use: installations at great heights, warehouses, production halls

- power: 77 W
- luminous flux: 10 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 120°
- dimensions: 257 × 30 mm in diameter

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





77 W | 10 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 159446

ZU901 | 1/-/-/5

15 46 140 200

NEW

- power: 100 W
- luminous flux: 13 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 120°
- dimensions: 257 × 30 mm in diameter

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 13 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 159460

ZU902 | 1/-/-/5

15 46 140 300

NEW

- power: 150 W
- luminous flux: 19 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 120°
- dimensions: 298 × 30 mm in diameter

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 19 500 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 159484

ZU903 | 1/-/-/2

15 46 140 400

NEW

- power: 200 W
- luminous flux: 26 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 120°
- dimensions: diameter 358 × 30 mm
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 26 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 159507

ZU904 | 1/-/-/2

15 46 140 500

NEW

Luminaires

Highbays

Accesories

- compatible accessories for expansion of the functionality of luminaires
- high-quality converters for industrial luminaires
- ideal for modification and modernization of existing installations
- practical additional mounting brackets

ZU9001 | 1/-/-/144

15 46 009 001

8 592920 096628 | 5 YEARS WARRANTY | Dimmable 0–10 V



product: 0–10 V converter for Highbay ▪ dimensions: 55 × 29 mm in diameter ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ packaging: 1 ks, box

ZU9002 | 1/-/-/144

15 46 009 002

8 592920 096642 | 5 YEARS WARRANTY | DALI COMPATIBLE



product: DALI converter for Highbay ▪ dimensions: 55 × 29 mm in diameter ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ packaging: 1 ks, box

ZU9902 | 1/-/-/20

15 46 009 902

8 592920 109618



product: bracket for Highbay ▪ dimensions: 254 × 115 × 50 mm ▪ material: aluminum ▪ designed for: Highbay line ASTER ▪ color: black ▪ packaging: 1 pc, packet

ZU9003 | 1/-/-/96

15 46 009 003

8 592920 121405 | 5 YEARS WARRANTY | PIR Sensor



product: PIR sensor for highbay ASTER ▪ dimensions: diemeter 55 × 40 mm ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ color: white ▪ packaging: 1 ks, box

www.emos.eu | Order Code Item Number | Packaging Type

ZU9004 1/-/-/144

15 46 009 004



product: MW sensor for highbay ASTER ▪ dimensions: 55 × 29 mm in diameter ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ color: white ▪ packaging: 1 ks, box

ZU9005 1/-/-/81

15 46 009 005



product: sensor settings controler for Highbay ASTER ▪ dimensions: 125 × 70 × 25 mm ▪ material: plastic ▪ designed for: Highbay line ASTER ▪ color: white ▪ packaging: 1 ks, box

Luminaires

Dustproofs

PROFI PLUS

MISTY

PROFI PLUS

- modern design and exceptional luminous efficiency
- designed for professional industrial installations, replacing older fluorescent luminaires
- long lifespan with instant 100% output
- IP66 guarantees resistance to water and dust
- operating cost savings up to 50% vs. fluorescent lights
- 5-year warranty
- use: warehouse buildings, garages, corridors, workshops, etc.

- dimensions: 1 220 × 85 × 80 mm
- power: 21–26–31–35 W
- luminous flux: 3 300–5 600 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C
- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



ZT1521 1/-/-/9

15 46 138 400

- dimensions: 1 220 × 85 × 80 mm
- power: 24–29–34–38 W
- luminous flux: 3 300–5 600 lm
- color temperature: 4 000–6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C
- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- lumen output in emergency mode: 700 lm
- backup time: 3 hours
- battery warranty: 2 years
- packaging: 1 pc, box



ZT1521E 1/-/-/9

15 46 138 401

- dimensions: 1 220 × 85 × 80 mm
- power: 21–26–31–35 W
- luminous flux: 3 300–5 600 lm
- color temperature: 6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C
- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



35 W | 5 600 lm | IP66 | 6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 122822

ZT1531 1/-/-/9

15 46 138 500

- dimensions: 1 520 × 85 × 80 mm
- power: 29–37–45–51 W
- luminous flux: 4 600–8 150 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C
- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



51 W | 8 150 lm | IP66 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 122846

ZT1621 1/-/-/9

15 46 138 600

- dimensions: 1 520 × 85 × 80 mm
- power: 32–40–48–54 W
- luminous flux: 4 600–8 150 lm
- color temperature: 4 000–6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C
- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- lumen output in emergency mode: 700 lm
- backup time: 3 hours
- battery warranty: 2 years
- packaging: 1 pc, box



54 W | 8 150 lm | IP66 | CCT switch | 4 000 K NEUTRAL WHITE | 6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 126189

ZT1621E 1/-/-/9

15 46 138 601

- dimensions: 1 520 × 85 × 80 mm
- power: 29–37–45–51 W
- luminous flux: 4 600–8 150 lm
- color temperature: 6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C
- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



51 W | 8 150 lm | IP66 | 6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 122860

ZT1631 1/-/-/9

15 46 138 700

- dimensions: 670 × 85 × 80 mm
- power: 10–13–16–18 W
- luminous flux: 1 500–2 700 lm
- color temperature: 4 000–6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C
- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



18 W | 1 500–2 700 lm | IP66 | 4 000 K NEUTRAL WHITE | 6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 122884

ZT1040 1/-/-/12

15 46 138 800

Luminaires

Dustproofs

PROFI

FESTY

PROFI

- excellent price-to-performance ratio
- designed for semi-professional industrial installations, replacing older fluorescent luminaires
- long lifespan with instant 100% output
- IP65 guarantees resistance to water and dust
- operating cost savings up to 50% vs. fluorescent lights
- 5-year warranty
- use: warehouse buildings, garages, corridors, workshops, etc.

- dimensions: 670 × 64 × 64 mm
- power: 18 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, box



18 W | 2 200 lm | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 118320

ZT4320 1/-/-/10

15 46 137 700

- dimensions: 1 270 × 64 × 64 mm
- power: 34 W
- luminous flux: 4 100 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, box



34 W | 4 100 lm | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 118344

ZT4420 1/-/-/10

15 46 137 800

- dimensions: 1 570 × 64 × 64 mm
- power: 51 W
- luminous flux: 6 000 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, box



51 W | 6 000 lm | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 118368

ZT4520 1/-/-/10

15 46 137 900

Luminaires

Dustproofs

ESSENTIAL

DUSTY

ESSENTIAL

- modern design, exceptional luminous efficiency, and long lifespan
- designed for industrial installations
- long lifespan with instant 100% output
- IP65 guarantees resistance to water and dust
- operating cost savings up to 50% vs. fluorescent lights
- 3-year warranty
- use: warehouse buildings, garages, corridors, workshops, etc.

- dimensions: 600 × 68 × 48 mm
- power: 18 W
- luminous flux: 2 340 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, blister





18 W | 2 340 lm | IP65 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 141281

ZT3021 1/-/-/12

15 46 139 900

- dimensions: 1 200 × 68 × 48 mm
- power: 36 W
- luminous flux: 4 680 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, blister



36 W | 4 680 lm | IP65 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 141267

ZT3121 1/-/-/12

15 46 140 000

- dimensions: 1 500 × 68 × 48 mm
- power: 50 W
- luminous flux: 6 500 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, blister



50 W | 6 500 lm | IP65 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 141304

ZT3221 1/-/-/12

15 46 140 100

Luminaires

Street Lights

PROFI

SOLIS

PROFI

- elegant solution for outdoor lighting
- the light can be positioned at a suitable angle
- robust construction withstands harsh weather conditions
- IP65 guarantees resistance to water and dust
- high operating cost savings compared to sodium discharge lamps
- 3-year warranty
- use: illumination of outdoor areas, parks, parking lots, etc.

- power: 30 W
- luminous flux: 3 600 lm
- color temperature: 3 000 K
- light color: warm white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 412 × 146 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





30 W | 3 600 lm | IP65 | IK08

3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 124055

Z00303 1/-/-/4

15 36 000 000

- power: 30 W
- luminous flux: 3 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 412 × 146 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





30 W | 3 600 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124079

Z00304 1/-/-/4

15 36 020 000

- power: 50 W
- luminous flux: 6 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 412 × 146 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





50 W | 6 000 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124093

Z00504 1/-/-/4

15 36 020 001

- power: 70 W
- luminous flux: 8 400 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 515 × 175 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





70 W | 8 400 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124116

ZO0704 1/-/-/2

15 36 020 002

Luminaires

Floodlights

PROFI PLUS

AVENO

PROFI PLUS

- combining top performance with a modern look
- well-made aluminum body can withstand harsh conditions
- selected models with an asymmetrical beam angle for focused illumination to a specific area, e.g. advertising spaces
- IP66 protection guarantees resistance to water and dust
- operating cost savings of up to 95% vs. halogen floodlights
- 5-year warranty
- use: permanent illumination of indoor and outdoor areas

- power: 20 W
- luminous flux: 2 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP66
- beam angle: 100°
- dimensions: 175 × 165 × 34 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





20 W | 2 900 lm | IP66 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 130728

ZS2413 1/-/-/10

15 31 241 300

SALE

- power: 30 W
- luminous flux: 4 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP66
- beam angle: 100°
- dimensions: 196 × 183 × 37 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





30 W | 4 500 lm | IP66 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 130742

ZS2423 1/-/-/10

15 31 242 300

- power: 48 W
- luminous flux: 7 200 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP66
- beam angle: 100°
- dimensions: 247 × 183 × 37 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




48 W | 7 200 lm | IP66 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 130766

ZS2433 1/-/-/10

15 31 243 300

- power: 50–70–100 W
- luminous flux: 16 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 294 × 270 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




100 W | 16 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129388

ZS2443 1/-/-/1

15 31 244 300

- power: 50–70–100 W
- luminous flux: 15 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 60° × 135°
- dimensions: 294 × 270 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




100 W | 15 500 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129456

ZS2443A 1/-/-/1

15 31 244 310

- power: 100–120–150 W
- luminous flux: 24 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 294 × 345 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




150 W | 24 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129395

ZS2453 1/-/-/1

15 31 245 300

- power: 100–120–150 W
- luminous flux: 23 250 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 60° × 135°
- dimensions: 294 × 345 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




150 W | 23 250 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129449

ZS2453A 1/-/-/1

15 31 245 310

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 150–170–200 W
- luminous flux: 32 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 368 × 388 × 75 mm
- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 32 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129401

ZS2463 1/-/-/1

15 31 246 300

- power: 150–170–200 W
- luminous flux: 31 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 60° × 135°
- dimensions: 368 × 388 × 70 mm
- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 31 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129432

ZS2463A 1/-/-/1

15 31 246 310

- power: 200–240–300 W
- luminous flux: 48 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 432 × 425 × 75 mm
- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





300 W | 48 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129418

ZS2473 1/-/-/1

15 31 247 300

Luminaires

Floodlights

PROFI

INOVO

PROFI

- professional construction for the most demanding conditions
- easy connection using a cable connector (included)
- selected models with adjustable PIR and twilight sensor
- operating cost savings of up to 70% vs. halogen floodlights
- 5-year warranty
- use: permanent lighting for indoor and outdoor spaces

- power: 10 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 95 × 70 × 28 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





1 100 lm | 10 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105665

ZS2612 1/-/-/30

15 31 242 612

- power: 20 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 135 × 95 × 28 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





2 200 lm | 20 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105689

ZS2622 1/-/-/20

15 31 242 622

- power: 30 W
- luminous flux: 3 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 160 × 110 × 28 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





3 300 lm | 30 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105702

ZS2632 1/-/-/10

15 31 242 632

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 50 W
- luminous flux: 5 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 200 × 145 × 28 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box




5 500 lm | 50 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105726

ZS2642 1/-/-/10

15 31 242 642

- power: 100 W
- luminous flux: 11 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 300 × 220 × 42 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




11 000 lm | 100 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105740

ZS2652 1/-/-/5

15 31 242 652

- power: 150 W
- luminous flux: 16 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 335 × 270 × 43 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




16 500 lm | 150 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105764

ZS2662 1/-/-/3

15 31 242 662

- power: 200 W
- luminous flux: 22 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 390 × 300 × 49 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




22 000 lm | 200 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105788

ZS2672 1/-/-/2

15 31 242 672

- power: 10 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 95 × 70 × 54 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box




1 100 lm | 10 W | IP65 | IK06 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105801

ZS2712 1/-/-/20

15 31 242 712

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 20 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 135 × 95 × 54 mm
- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





2 200 lm | 20 W | IP65 | IK06 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105825

ZS2722

15 31 242 722

1/-/-/20

- power: 30 W
- luminous flux: 3 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 160 × 110 × 55 mm
- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





3 300 lm | 30 W | IP65 | IK06 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105832

ZS2732

15 31 242 732

1/-/-/10

- power: 50 W
- luminous flux: 5 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 200 × 145 × 55 mm
- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





5 500 lm | 50 W | IP65 | IK06 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105849

ZS2742

15 31 242 742

1/-/-/10

Luminaires

Floodlights

CLASSIC

TAMBO

CLASSIC

- offers an ultra-slim design and complete reliability
- milky PC diffuser ensures pleasantly diffused light
- angled mounting bracket allows for easy and secure installation
- selected models with adjustable PIR and twilight sensor
- resistance to water and dust
- operating cost savings of up to 70% vs. halogen floodlights
- 3-year warranty
- use: basic applications in commercial and private spaces

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 105 × 102 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





1 000 lm | 10 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139714

ZS2512 | 1/-/-/14

15 31 251 200 | SALE

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 135 × 101 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2 000 lm | 20 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139738

ZS2522 | 1/-/-/12

15 31 252 200 | SALE

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 165 × 114 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





3 000 lm | 30 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139752

ZS2532 | 1/-/-/10

15 31 253 200 | SALE

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 210 × 142 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box




5 000 lm | 50 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139776

ZS2542 1/-/-/7

15 31 254 200 SALE

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 105 × 143 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box




1 000 lm | 10 W | IP54 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139790

ZS2912 1/-/-/14

15 31 291 200 SALE

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 135 × 165 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box




2 000 lm | 20 W | IP54 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139813

ZS2922 1/-/-/12

15 31 292 200 SALE

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 165 × 185 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box




3 000 lm | 30 W | IP54 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139837

ZS2932 1/-/-/10

15 31 293 200 SALE

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 210 × 217 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box




5 000 lm | 50 W | IP54 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 139851

ZS2942 1/-/-/7

15 31 294 200 SALE

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 105 × 71 × 36 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box




1 000 lm | 10 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156650

ZS2514
15 31 291 000

1/-/-/14
NEW

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 105 × 116 × 39 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box




1 000 lm | 10 W | IP44 | IK07 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156759

ZS2914
15 31 291 010

1/-/-/14
NEW

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 126 × 96 × 38 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box




2 000 lm | 20 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156674

ZS2524
15 31 292 000

1/-/-/12
NEW

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 126 × 138 × 39 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box




2 000 lm | 20 W | IP44 | IK07 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156773

ZS2924
15 31 292 020

1/-/-/12
NEW

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 155 × 130 × 39 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box




3 000 lm | 30 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156698

ZS2534
15 31 293 000

1/-/-/10
NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 155 × 172 × 39 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





3 000 lm | 30 W | IP44 | IK07

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156797

ZS2934

15 31 293 030

1/-/-/10

NEW

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 190 × 148 × 39 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





5 000 lm | 50 W | IP65 | IK07

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156711

ZS2544

15 31 295 000

1/-/-/7

NEW

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 190 × 191 × 39 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





5 000 lm | 50 W | IP44 | IK07

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156810

ZS2944

15 31 295 050

1/-/-/7

NEW

- power: 100 W
- luminous flux: 10 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 275 × 219 × 41 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- lead-in cable type: 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





10 000 lm | 100 W | IP65 | IK07

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 156735

ZS2554

15 31 296 000

1/-/-/7

NEW

VISIO

CLASSIC

- combines exceptionally high luminous efficacy with easy installation and cost savings
- angled mounting bracket allows for easy and secure installation
- selected models with PIR sensor and twilight sensor
- 3-year warranty
- use: non-demanding applications in commercial and private buildings and surrounding outdoor areas

---

- power: 10 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 113 × 137 × 22 mm

- supply cable length: 25 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





1 500 lm | 10 W | IP65 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 141939

ZS2513 1/-/5/30

15 31 251 300

- power: 20 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 137 × 113 × 22 mm

- supply cable length: 25 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





3 000 lm | 20 W | IP65 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 141953

ZS2523 1/-/5/30

15 31 252 300

- power: 30 W
- luminous flux: 4 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 163 × 135 × 22 mm

- supply cable length: 25 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





4 500 lm | 30 W | IP65 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 141977

ZS2533 1/-/-/24

15 31 253 300

- power: 50 W
- luminous flux: 7 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 189 × 163 × 22 mm

- supply cable length: 25 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





7 500 lm | 50 W | IP65 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 141991

ZS2543 1/-/-/20

15 31 254 300

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 100 W
- luminous flux: 15 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 110°
- dimensions: 260 × 226 × 24 mm

- supply cable length: 25 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





15 000 lm | 100 W | IP65

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 142011

ZS2553 1/-/-/10

15 31 255 300

- power: 10 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 110°
- dimensions: 113 × 185 × 55 mm

- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





1 500 lm | 10 W | IP54

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 142035

ZS2913 1/-/5/15

15 31 291 300

- power: 20 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 110°
- dimensions: 185 × 113 × 55 mm

- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





3 000 lm | 20 W | IP54

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 142059

ZS2923 1/-/5/15

15 31 292 300

- power: 30 W
- luminous flux: 4 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 110°
- dimensions: 215 × 135 × 50 mm

- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





4 500 lm | 30 W | IP54

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 142073

ZS2933 1/-/-/12

15 31 293 300

- power: 50 W
- luminous flux: 7 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 110°
- dimensions: 242 × 163 × 50 mm

- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





7 500 lm | 50 W | IP54

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 lm/W HIGHLY EFFICIENT

8 592920 142097

ZS2943 1/-/-/8

15 31 294 300

Luminaires

Floodlights

ESSENTIAL

GLARO

ESSENTIAL

- combines a durable aluminum body with an ultra-slim design
- stands out with an excellent price-to-performance ratio
- angled mounting bracket allows for easy and secure installation
- selected models with adjustable PIR and twilight sensor
- resistance to water and dust
- operating cost savings of up to 90% vs. halogen floodlights
- use: basic applications in commercial and private spaces

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 102 × 98 × 26 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





1 000 lm | 10 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142134

ZS2214B 1/-/5/30

15 31 221 400

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 102 × 98 × 26 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





1 000 lm | 10 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142318

ZS2214W 1/-/5/30

15 31 221 401

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 120 × 112 × 28 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





2 000 lm | 20 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142158

ZS2224B 1/-/5/20

15 31 222 400

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 120 × 112 × 28 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




2 000 lm | 20 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142332

ZS2224W 1/-/5/20

15 31 222 401

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 156 × 139 × 30 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




3 000 lm | 30 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142172

ZS2234B 1/-/5/20

15 31 223 400

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 156 × 139 × 30 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




3 000 lm | 30 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142356

ZS2234W 1/-/5/20

15 31 223 401

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 188 × 165 × 32 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




5 000 lm | 50 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142196

ZS2244B 1/-/4/16

15 31 224 400

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 188 × 165 × 32 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




5 000 lm | 50 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142370

ZS2244W 1/-/4/16

15 31 224 401

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 100 W
- luminous flux: 10 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 242 × 203 × 34 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





10 000 lm | 100 W | IP65 | 4 000 K NEUTRAL WHITE

8 592920 142219

ZS2254B 1/-/4/8

15 31 225 400

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 105 × 134 × 52 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





1 000 lm | 10 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142233

ZS2314B 1/-/5/20

15 31 231 400

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 105 × 134 × 52 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





1 000 lm | 10 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142394

ZS2314W 1/-/5/20

15 31 231 401

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 124 × 149 × 54 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





2 000 lm | 20 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142257

ZS2324B 1/-/5/20

15 31 232 400

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 124 × 149 × 54 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





2 000 lm | 20 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142417

ZS2324W 1/-/5/20

15 31 232 401

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 159 × 178 × 56 mm
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




3 000 lm | 30 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142271

ZS2334B 1/-/4/8

15 31 233 400

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 159 × 178 × 56 mm
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




3 000 lm | 30 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142431

ZS2334W 1/-/4/8

15 31 233 401

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 193 × 204 × 58 mm
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




5 000 lm | 50 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142295

ZS2344B 1/-/4/8

15 31 234 400

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 193 × 204 × 58 mm
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box




5 000 lm | 50 W | IP54 | 4 000 K NEUTRAL WHITE

8 592920 142455

ZS2344W 1/-/4/8

15 31 234 401

Luminaires

Floodlights

Accessories

- wide range of accessories for LED floodlights
- plastic cable connectors for easy connection of two or more three-core cables
- stands for mounting LED floodlights
- practical foldable tripods for mounting up to 2 floodlights

- voltage: 250 V
- IP rating: IP68
- dimensions: 26 × 70 mm in diameter
- body material: plastic (PA66)
- mechanical impact protection: IK08
- packaging: 1 pc, packet





IP68

8 592920 031919

ZS9010 1/-/10/90

15 31 900 010

- voltage: 250 V
- IP rating: IP68
- dimensions: 26 × 90 mm in diameter
- body material: plastic (PA66)
- mechanical impact protection: IK08
- packaging: 1 pc, packet





IP68

8 592920 087718

ZS9020 1/-/10/90

15 31 900 020

- voltage: 250 V
- IP rating: IP68
- dimensions: 26 × 90 × 62 mm
- body material: plastic (PA66)
- mechanical impact protection: IK08
- packaging: 1 pc, packet





IP68

8 592920 087749

ZS9030 1/-/10/80

15 31 900 030

- dimensions: 140 × 120 × 630 mm
- body material: steel
- packaging: 1 pc, box





4 kg max.

8 592920 035160

ZS9510

15 31 950 010

1/-/-/4

SALE

Luminaires

Work Lights

PROFI

CANNO

PROFI

- emits light in all directions and perfectly illuminates the work area
- ideal for non-static work in both indoor and outdoor environments
- robust design with high water and impact resistance
- handle and foldable frame make handling during work easier
- integrated socket enables series connection of multiple luminaires
- IP54 guarantees resistance to water and dust
- 3-year warranty
- use: illumination of workplaces, garages, workshops, auto shops

- power: 70 W
- luminous flux: 7 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 360°
- dimensions: 205 × 160 × 880 mm

- supply cable length: 2 m
- number of adapter plugs: 1
- adapter plug type: FRENCH
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: plastic (ABS)
- mechanical impact protection: IK07
- packaging: 1 pc, box

70 W | 7 000 lm | IP54 | IK07

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY





8 592920 120521

ZS3360F

15 40 233 600

1/-/-/1

- power: 70 W
- luminous flux: 7 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 360°
- dimensions: 205 × 160 × 880 mm

- supply cable length: 2 m
- number of adapter plugs: 1
- adapter plug type: GERMAN
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: plastic (ABS)
- mechanical impact protection: IK07
- packaging: 1 pc, box

70 W | 7 000 lm | IP54 | IK07

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY





8 592920 120545

ZS3360S

15 42 033 601

1/-/-/1

TANNO

PROFI

- emits light in all directions and dims individual segments
- resistance to water and dust
- excellent illumination on the ground, tripod, or hook
- the battery-powered version can operate for up to 12 hours and allows color temperature adjustment (variable CCT)
- 3-year warranty
- use: illumination of construction sites, workshops, garages, etc.

- power: 45 W
- luminous flux: 5 000 lm
- color temperature: 3,000–4,500–6,500 K
- light color: warm white–neutral white-cool white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 360°
- dimensions: 189 × 165 × 436 mm

- battery: Li-Ion 15 000 mAh
- AKU lighting time: 3 – 12 hours
- lead-in cable type: USB C
- body material: plastic
- mechanical impact protection: IK08
- packaging: 1 pc, box





45 W | 5 000 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 160831

ZS3362 | 1/-/-/3

15 42 304 500 | NEW

- power: 60 W
- luminous flux: 6 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 360°
- dimensions: 189 × 165 × 436 mm

- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: plastic
- mechanical impact protection: IK08
- packaging: 1 pc, box





60 W | 6 500 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 160817

ZS3361 | 1/-/-/3

15 42 306 000 | NEW

ELION

PROFI

- floodlights with battery offer maximum variability
- robust design suitable for work in harsh environments
- no need for a nearby power socket
- folding stand for easy transportation and storage
- high IP rating ensures water resistance
- 120° lighting angle
- 5-year warranty
- use: construction, garage, workshop, auto shop, camping

- power: 20 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 110°
- dimensions: 212 × 143 × 248 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





3 000 lm | 20 W | IP65 | IK07

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | 150 cm

8 592920 156834

ZS3323 | 1/-/-/6

15 31 251 011 | NEW

- power: 30 W
- luminous flux: 4 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 110°
- dimensions: 252 × 280 × 169 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





4 800 lm | 30 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | 150 cm

8 592920 156858

ZS3333 15 31 251 021 | 1/-/-/4 | NEW

- power: 50 W
- luminous flux: 8 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 110°
- dimensions: 281 × 182 × 297 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





8 000 lm | 50 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | 150 cm

8 592920 156872

ZS3343 15 31 251 031 | 1/-/-/4 | NEW

- power: 100 W
- luminous flux: 16 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 110°
- dimensions: 398 × 349 × 247 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





16 000 lm | 100 W | IP65 | IK07 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | 150 cm

8 592920 156896

ZS3353 15 31 251 041 | 1/-/-/2 | NEW

- power: 2× 30 W
- luminous flux: 2× 4 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 110°
- dimensions: 1 153 × 1 075 × 1 686 mm

- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F 3G1.0 mm²
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 4 800 lm | 2× 30 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | +50% HIGHER INTENSITY

8 592920 158760

ZS3333.2 15 31 251 051 | 1/-/-/2 | NEW

- power: 2× 50 W
- luminous flux: 2× 8 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 110°
- dimensions: 1 153 × 1 075 × 1 705 mm

- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 8 000 lm | 2× 50 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | +50% HIGHER INTENSITY

8 592920 158784

ZS3343.2 15 31 251 061 | 1/-/-/2 | NEW

Luminaires

Work Lights

CLASSIC

ILIO

CLASSIC

- portable LED floodlights powered from the mains with a wide beam angle
- feature a robust construction with high impact resistance
- cleverly designed handle and foldable frame for easy handling
- IP44 guarantees resistance to water and dust
- use: suitable for work in demanding conditions e.g. on construction sites, in workshops, garages, auto shops, etc.

- power: 21 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 215 × 185 × 250 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK10
- packaging: 1 pc, box





1 900 lm | 21 W | IP44 | IK10 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 cm

8 592920 104835

ZS3322 | 1/-/-/6

15 42 033 220

SALE

- power: 31 W
- luminous flux: 2 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 240 × 185 × 275 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK10
- packaging: 1 pc, box





2 800 lm | 31 W | IP44 | IK10 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 cm

8 592920 104859

ZS3332 | 1/-/-/4

15 42 033 320

SALE

- power: 51 W
- luminous flux: 4 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 270 × 185 × 275 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK10
- packaging: 1 pc, box





4 600 lm | 51 W | IP44 | IK10 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 cm

8 592920 104873

ZS3342 | 1/-/-/4

15 42 033 420

SALE

HOBBY SLIM

CLASSIC

- practical LED floodlights on a foldable steel tripod
- suitable for illumination of both indoor and outdoor areas
- withstands rough handling, low outdoor temperatures and rain
- practical stand allows for better adjustment of the light direction
- integrated socket enables series connection of multiple luminaires
- IP65 guarantees resistance to water and dust
- use: illumination of workplaces, garages, workshops, auto shops

- power: 2× 20,5 W
- luminous flux: 2× 1 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 860 × 860 × 1 850 mm

- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 1 600 lm | 2× 20.5 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 m

8 592920 067543

ZS2221.2 | 1/-/-/2

15 31 222 120 | SALE

- power: 2× 30 W
- luminous flux: 2× 2 400 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 860 × 860 × 1 850 mm

- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 2 400 lm | 2× 30 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 m

8 592920 067567

ZS2231.2 | 1/-/-/2

15 31 223 120 | SALE

ACCO

CLASSIC

- offers greater flexibility thanks to an integrated battery
- does not require connection to the power grid
- robust design for demanding environments
- practical stand allows for better adjustment of the light direction
- IP54 guarantees resistance to water and dust
- 3-year warranty
- use: illumination of workplaces, garages, workshops, auto shops

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC 220–240 V AC
- IP rating: IP54
- beam angle: 120°
- dimensions: 212 × 177 × 224 mm

- battery: Li-Ion 4 400 mAh
- AKU lighting time: 3 – 10 hours
- body material: aluminum
- packaging: 1 pc, box





1 000 lm | 10 W | IP54 | IK05 | Li-Ion 4 400 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEPS DIMMING

8 592920 108123

ZS2812 | 1/-/-/5

15 31 281 200 | SALE

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC 220–240 V AC
- IP rating: IP54
- beam angle: 120°
- dimensions: 266 × 220 × 273 mm
- battery: Li-Ion 6 600 mAh
- AKU lighting time: 3 – 10 hours
- body material: aluminum
- packaging: 1 pc, box




2 000 lm | 20 W | IP54 | IK05 | Li-Ion 6 600 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEPS DIMMING

8 592920 108147

ZS2822 1/-/-/4

15 31 282 200 SALE

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC 220–240 V AC
- IP rating: IP54
- beam angle: 120°
- dimensions: 292 × 219 × 273 mm
- battery: Li-Ion 10 000 mAh
- AKU lighting time: 3 – 10 hours
- body material: aluminum
- packaging: 1 pc, box




3 000 lm | 30 W | IP54 | IK05 | Li-Ion 10 000 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEPS DIMMING

8 592920 108161

ZS2832 1/-/-/2

15 31 283 200 SALE

- power: 20 W
- luminous flux: 1 650 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC
- IP rating: IP54
- beam angle: 120°
- dimensions: 212 × 177 × 227 mm
- battery: Li-Ion 5 000 mAh
- AKU lighting time: 3 – 12 hours
- lead-in cable type: USB C
- body material: aluminum
- mechanical impact protection: IK05
- packaging: 1 pc, box




1 650 lm | 20 W | IP54 | IK05 | Li-Ion 5 000 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEP DIMMABLE

8 592920 154137

ZS2813 1/-/-/5

15 42 032 000 NEW

- power: 35 W
- luminous flux: 3 300 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC
- IP rating: IP54
- beam angle: 120°
- dimensions: 266 × 220 × 276 mm
- battery: Li-Ion 10 000 mAh
- AKU lighting time: 3 – 12 hours
- lead-in cable type: USB C
- body material: aluminum
- mechanical impact protection: IK05
- packaging: 1 pc, box




3 300 lm | 35 W | IP54 | IK05 | Li-Ion 10 000 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEP DIMMABLE

8 592920 154151

ZS2823 1/-/-/4

15 42 033 000 NEW

- power: 50 W
- luminous flux: 4 950 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC
- IP rating: IP54
- beam angle: 120°
- dimensions: 292 × 219 × 276 mm
- battery: Li-Ion 15 000 mAh
- AKU lighting time: 3 – 12 hours
- lead-in cable type: USB C
- body material: aluminum
- mechanical impact protection: IK05
- packaging: 1 pc, box




4 950 lm | 50 W | IP54 | IK05 | 4 950 lm | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEP DIMMABLE

8 592920 154175

ZS2833 1/-/-/2

15 42 035 000 NEW

Luminaires

Work Lights

ESSENTIAL

GLARO

ESSENTIAL

- IP65/44 rating for maximum performance in demanding environments
- portability provides high flexibility for all models
- adjustable light direction
- durable metal construction
- foldable for transportation and storage
- use: construction sites, workshops, auto shops, etc.

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 120°
- dimensions: 215 × 57 × 229 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





3 000 lm | 30 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 100 lm/W HIGHLY EFFICIENT | 150 cm

8 592920 158951

ZS3213 | 1/-/-/8

15 31 223 500 | NEW

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 120°
- dimensions: 248 × 59 × 255 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





5 000 lm | 50 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 100 lm/W HIGHLY EFFICIENT | 150 cm

8 592920 158975

ZS3214 | 1/-/-/8

15 31 224 500 | NEW

- power: 100 W
- luminous flux: 10 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 120°
- dimensions: 297 × 59 × 290 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





10 000 lm | 100 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 100 lm/W HIGHLY EFFICIENT | 150 cm

8 592920 158999

ZS3215 | 1/-/-/4

15 31 225 500 | NEW

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 2× 30 W
- luminous flux: 2× 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 120°
- dimensions: 732 × 630 × 1 723 mm
- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 3 000 lm | 2× 30 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 100 lm/W HIGHLY EFFICIENT | 3 m

8 592920 159026

ZS3213.2

15 31 223 502

1/-/-/2

NEW

- power: 2× 50 W
- luminous flux: 2× 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 120°
- dimensions: 732 × 630 × 1 748 mm
- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 5 000 lm | 2× 50 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 100 lm/W HIGHLY EFFICIENT | 3 m

8 592920 159040

ZS3214.2

15 31 224 502

1/-/-/2

NEW

- power: 2× 100 W
- luminous flux: 2× 10 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65/IP44
- beam angle: 120°
- dimensions: 732 × 630 × 1 784 mm
- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 10 000 lm | 2× 100 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 100 lm/W HIGHLY EFFICIENT | 3 m

8 592920 159064

ZS3215.2

15 31 225 402

1/-/-/2

NEW

Luminaires

Linear Luminaires

PROFI PLUS

ORTO

PROFI PLUS

- modern linear luminaires for indoor spaces
- made from high-quality aluminum
- supports linear connection of individual light fixtures
- allows for surface-mounted, recessed, or suspended installation
- 5-year warranty
- use: illumination of offices, retail areas, indoor spaces

- power: 8 W
- luminous flux: 800 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 151 × 151 × 58 mm
- body colour: white

- line: ORTO
- warranty period: 5 years
- UGR<: 22





800 lm | 8 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114438

ZALL 1/-/-/12

15 43 081 000 SALE

- power: 12 W
- luminous flux: 1 200 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 252 × 151 × 58 mm
- body colour: white

- line: ORTO
- warranty period: 5 years
- UGR<: 22





1 200 lm | 12 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114414

ZALT 1/-/-/8

15 43 121 000 SALE

- power: 15 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 252 × 252 × 58 mm
- body colour: white

- line: ORTO
- warranty period: 5 years
- UGR<: 22





1 500 lm | 15 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114391

ZALX 1/-/-/6

15 43 151 000 SALE

- power: 19 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 600 × 49 × 58 mm
- body colour: white
- line: ORTO
- warranty period: 5 years
- UGR<: 22




2 000 lm | 19 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114353

ZAL192 1/-/-/6

15 43 191 000

SALE

- power: 38 W
- luminous flux: 4 200 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 1 200 × 49 × 58 mm
- body colour: white
- line: ORTO
- warranty period: 5 years
- UGR<: 22




4 200 lm | 38 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114377

ZAL382 1/-/-/6

15 43 381 000

- product: wire set
- dimensions: 150 cm (cable length)
- designed for: linear luminaires
- packaging: 1 ks, box




8 592920 114452

ZALAP 1/-/-/100

15 43 999 000

- product: hook set
- designed for: linear luminaires
- packaging: 1 ks, box




8 592920 114476

ZALAR 1/-/-/36

15 43 999 001

SALE

- product: power supply box
- material: metal
- designed for: linear luminaires




8 592920 115473

ZALAS 1/-/-/24

15 43 999 002

Luminaires

LED Panels

PROFI PLUS

PROXO

PROFI PLUS

- represents an efficient solution for indoor lighting
- available in square or rectangular shape
- offers high efficiency and energy savings
- light-guiding panels prevent yellowing caused by UV radiation
- 5-year warranty
- use: offices, classrooms, indoor spaces, etc.

- power: 40 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 3 700 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 95
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 19





3 700 lm | 40 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | REAL COLORS CRI>95

8 592920 083291

ZR1433 | 1/-/-/5

15 44 104 032

- power: 19 W
- replacement of incandescent bulb: 2× 18 W CFL
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 295 × 10,4 mm

- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22



1 800 lm | 19 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 034095

ZR2212 | 1/-/-/8

15 41 181 200

SALE

- power: 33 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 360 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22





4 360 lm | 33 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 131954

ZB1114 | 1/-/-/4

15 44 103 320

SALE

- power: 33 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 19





8 592920 131978

ZB1124
15 44 103 321
1/-/-/4
SALE

- power: 33 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 360 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 295 × 1 195 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22





8 592920 131992

ZB3114
15 44 203 320
1/-/-/4
SALE

- power: 33 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 295 × 1 195 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 19





8 592920 132012

ZB3124
15 44 203 321
1/-/-/4

PIXXO

PROFI PLUS

- designed for illumination of spaces with higher humidity
- light-guiding panels prevent yellowing caused by UV radiation
- IP65 guarantees resistance to water and dust
- 5-year warranty
- use: offices, classrooms, swimming pools, or corridors

- power: 48 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 800 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22





8 592920 067826

ZR1532
15 44 104 820
1/-/-/4

LEXXO

PROFI PLUS

- offers uniform light distribution and higher luminous efficiency
- backlit technology
- uniform light creates a more pleasant atmosphere
- combines high efficiency with energy savings
- 5-year warranty
- use: offices, classrooms, indoor spaces, etc.

- power: 30 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 200 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 25 mm

- body colour: white
- line: LEXXO
- warranty period: 5 years
- UGR<: 22





4 200 lm | 30 W | IP20/IP44 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 125465

ZB2154 1/-/-/4

15 44 103 027

VEXXO

PROFI PLUS

- combines high luminous efficiency with a very low glare index
- available in square or rectangular shape
- offers high efficiency and energy savings
- integrated frame allows for surface-mounted installation
- light-guiding panels prevent yellowing caused by UV radiation
- 5-year warranty
- use: offices, classrooms, indoor spaces, etc.

- power: 33 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: surface
- dimensions: 601 × 601 × 37 mm

- body colour: white
- line: VEXXO
- warranty period: 5 years
- UGR<: 19





4 000 lm | 33 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 132920

ZB1524 1/-/-/4

15 44 103 322

- power: 33 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: surface
- dimensions: 1 201 × 301 × 37 mm

- body colour: white
- line: VEXXO
- warranty period: 5 years
- UGR<: 19



4 000 lm | 33 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 132944

ZB3524 1/-/-/4

15 44 203 322

LUXXO

PROFI PLUS

- provides an efficient solution for indoor lighting
- available in square or rectangular design
- offers high efficiency with an energy class A light source
- 5-year warranty
- application: offices, classrooms, indoor spaces

- power: 22 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 32 mm

- body colour: white
- line: LUXXO
- warranty period: 5 years
- UGR<: 22



4 000 lm | 22 W | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 152874

ZB2110 | 1/-/-/5

15 44 102 220 | NEW

- power: 22 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 3 800 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 32 mm

- body colour: white
- line: LUXXO
- warranty period: 5 years
- UGR<: 19





3 800 lm | 22 W | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 152898

ZB2120 | 1/-/-/5

15 44 102 221 | NEW

- power: 22 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 295 × 1 195 × 32 mm

- body colour: white
- line: LUXXO
- warranty period: 5 years
- UGR<: 22



4 000 lm | 22 W | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 152911

ZB4110 | 1/-/-/5

15 44 202 220 | NEW

- power: 22 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 3 800 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 295 × 1 195 × 32 mm

- body colour: white
- line: LUXXO
- warranty period: 5 years
- UGR<: 19





3 800 lm | 22 W | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 152935

ZB4120 | 1/-/-/5

15 44 202 221 | NEW

Luminaires

LED Panels

PROFI

MAXXO

PROFI

- represents an economical option for lighting solutions (especially office spaces)
- available in square or rectangular shape
- offers high efficiency and energy savings
- selected models feature low glare
- 5-year warranty
- use: offices, classrooms, indoor spaces, etc.

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 100 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 19







8 592920 124659

ZB1223 1/-/-/5

15 44 103 610 SALE

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 22







8 592920 124635

ZB1214 1/-/-/5

15 44 103 628 SALE

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 19







8 592920 124673

ZB1224 1/-/-/5

15 44 103 629 SALE

- power: 36 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 1 195 × 295 × 10 mm
- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 22



4 320 lm | 36 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124697

ZB3214
15 44 103 630
1/-/-/5
SALE

REXXO

PROFI

- offers more uniform light distribution and higher luminous efficiency
- backlit technology
- uniform light creates a more pleasant atmosphere
- combines high efficiency and excellent performance
- 5-year warranty
- use: offices, classrooms, indoor spaces, etc.

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 24 mm
- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: 22



4 000 lm | 36 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 121368

ZB2214
15 44 103 622
1/-/-/4
SALE

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 24 mm
- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: 19



4 000 lm | 36 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 121382

ZB2224
15 44 103 623
1/-/-/4
SALE

- power: 30 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 200 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 28 mm
- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: 22



4 200 lm | 30 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 159347

ZB2210
15 44 103 656
1/-/-/6
NEW

- power: 30 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 28 mm
- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: 19





8 592920 159361

ZB2220
15 44 103 657
1/-/-/6
NEW

- power: 40 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 6 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 30 mm
- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: 23





8 592920 159408

ZB221H
15 44 104 052
1/-/-/5
NEW

- power: 40 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 5 700 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 30 mm
- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: <20





8 592920 159422

ZB222H
15 44 104 053
1/-/-/5
NEW

BAXXO

PROFI

- offers more uniform light distribution and higher luminous efficiency
- backlit technology
- integrated frame allows for surface-mounted installation
- selected models with very low glare
- combines high efficiency and excellent performance
- 5-year warranty
- use: offices, classrooms, indoor spaces etc.

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 600 × 600 × 50 mm
- body colour: white
- line: BAXXO
- warranty period: 5 years
- UGR<: 22





8 592920 143124

ZB1614
15 44 103 643
1/-/-/2

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: surface
- dimensions: 600 × 600 × 50 mm
- body colour: white
- line: BAXXO
- warranty period: 5 years
- UGR<: 19





4 320 lm | 36 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 143148

ZB1624
15 44 103 644

1/-/-/2

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 1 200 × 300 × 50 mm
- body colour: white
- line: BAXXO
- warranty period: 5 years
- UGR<: 22



4 320 lm | 36 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 143186

ZB3614
15 44 203 620

1/-/-/2

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: surface
- dimensions: 1 200 × 300 × 50 mm
- body colour: white
- line: BAXXO
- warranty period: 5 years
- UGR<: 19





4 320 lm | 36 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 143162

ZB3624
15 44 203 621

1/-/-/2

Luminaires

LED Panels

CLASSIC

DIXXO

CLASSIC

- represents an economical option for indoor lighting
- simple, elegant design with high-quality light, suitable mainly for classrooms and offices
- 5-year warranty
- use: offices, classrooms, indoor spaces, etc.

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 28 mm

- body colour: white
- line: DIXXO
- warranty period: 5 years
- UGR<: 22





8 592920 149102

ZB2410 | 1/-/-/6

15 44 103 645

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 28 mm

- body colour: white
- line: DIXXO
- warranty period: 5 years
- UGR<: 19





8 592920 152843

ZB2420 | 1/-/-/6

15 44 103 655

NEW

Luminaires

LED Panels

Accessories

- practical solutions for various LED panel installation methods
- supports recessed, suspended or surface-mounted installation
- ensures safe, stable, and aesthetically pleasing fixture mounting

ZR9001 4/-/-/400

15 42 009 001

8 592920 034415



product: spring set ▪ material: metal ▪ designed for: LED panel 60 × 60 (30) (PROXO, MAXXO) ▪ packaging: 4 pcs, bag

ZR9002 1/-/-/100

15 42 009 002

8 592920 034439



product: spring set ▪ material: metal ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ packaging: 6 pcs, bag

ZR9010 1/-/-/100

15 42 009 010

SALE

8 592920 034453



product: hook set ▪ material: metal ▪ designed for: LED panel 60 × 60 (30) (PROXO, MAXXO) ▪ packaging: 4 pcs, bag

ZR9011 1/-/-/100

15 42 009 011

SALE

8 592920 034477



product: hook set ▪ material: metal ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ packaging: 6 pcs, bag

ZR9020 4/-/-/400

15 42 009 020

8 592920 034491



product: wire set ▪ dimensions: 5 – 145 cm (cable length) ▪ material: metal ▪ designed for: LED panel 60 × 60 (30) (PROXO, MAXXO) ▪ packaging: 4 pcs, bag

ZR9021 6/-/-/600

15 42 009 021

8 592920 034514



product: wire set ▪ dimensions: 5 – 145 cm (cable length) ▪ material: metal ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ packaging: 6 pcs, bag

ZR9034 1/-/-/20

15 42 009 034





product: frame for surface installation ▪ dimensions: 600 × 600 × 45 mm ▪ material: aluminum ▪ designed for: LED panel 60 × 60 (PROXO, MAXXO) ▪ color: white ▪ packaging: 1 ks, box

ZR9035 1/-/-/15

15 42 009 035





product: frame for surface installation ▪ dimensions: 1 200 × 300 × 45 mm ▪ material: aluminum ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ color: white ▪ packaging: 1 ks, box

ZR9036 1/-/-/20

15 44 100 000





product: frame for surface installation ▪ dimensions: 600 × 600 × 70 mm ▪ material: aluminum ▪ designed for: Backlit panel 60 × 60 ▪ color: white ▪ packaging: 1 ks, box

Luminaires

Drivers

- external power supplies for controlling LED lights
- ensure optimal functionality and energy efficiency
- protection against LED damage
- 5-year warranty
- use: for household and industrial use

ZZ1435T 1/-/-/50

15 60 014 350







- voltage input: 220–240 V AC
- frequency: 50/60 Hz
- output voltage: 25–42 V DC
- output current: 200–350 mA
- power: 14 W
- dimensions: 122 × 40 × 25 mm
- type: TRIAK
- warranty period: 5 years

ZZ2055T 1/-/-/50

15 60 020 550







- voltage input: 220–240 V AC
- frequency: 50/60 Hz
- output voltage: 25–42 V DC
- output current: 400–550 mA
- power: 20 W
- dimensions: 122 × 40 × 25 mm
- type: TRIAK
- warranty period: 5 years

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

ZZ3070T 1/-/-/50

15 60 030 700



30 W

5 YEARS WARRANTY

- voltage input: 220–240 V AC
- frequency: 50/60 Hz
- output voltage: 25–42 V DC
- output current: 550-750 mA
- power: 30 W
- dimensions: 145 × 46 × 27.5 mm
- type: TRIAK
- warranty period: 5 years

ZZ409BD 1/-/-/48

15 60 040 900



40 W

5 YEARS WARRANTY

- voltage input: 200–240 V AC
- frequency: 50/60 Hz
- output voltage: 6–42 V DC
- output current: 600–1 100 mA
- power: 40 W
- dimensions: 103 × 68 × 30 mm
- type: DALI 2.0, PUSH DIM
- warranty period: 5 years

Luminaires

Surface Luminaires

EXCLUSIVE

RIVI

EXCLUSIVE

- modern luminaires of premium quality for the right atmosphere
- ability to create and easily control groups of luminaires
- allows for smooth dimming and light color setting
- low glare rating protection against eye discomfort
- 3-year warranty
- use: illumination of interiors in households, office spaces or hotels

- power: 40 W
- luminous flux: 380–3 800 lm
- color temperature: 2 700–6 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 595 × 595 × 52 mm
- dimming function
- body colour: white
- line: RIVI
- warranty period: 3 years
- UGR<: 22

380–3 800 lm | 40 W | IP20 | Dimmable 10 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY





ZM5173 1/-/-/4

15 44 103 603

- power: 25 W
- luminous flux: 210–2 100 lm
- color temperature: 2 700–6 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 295 × 595 × 52 mm
- dimming function
- body colour: white
- line: RIVI
- warranty period: 3 years
- UGR<: 22

210–2 100 lm | 25 W | IP20 | Dimmable 10 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY





ZM5172 1/-/-/4

15 44 102 400

SALE

ALVI

EXCLUSIVE

- luminaires in a circular shape with economical LEDs
- timer function and smooth dimming
- ability of color setting, and pleasant night lighting
- illumination of the ceiling above the luminaire creates a pleasant halo effect
- 3-year warranty
- use: illumination of interiors in households, office spaces or hotels

- power: 24 W
- replacement of incandescent bulb: 120 W
- luminous flux: 80–1 920 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 360 × 58 mm in diameter
- dimming function
- body colour: white
- line: ALVI
- warranty period: 3 years





8 592920 089484

ZM5165 1/-/-/5

15 39 084 002

- power: 36 W
- replacement of incandescent bulb: 170 W
- luminous flux: 140–2 880 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 500 × 60 mm in diameter
- dimming function
- body colour: white
- line: ALVI
- warranty period: 3 years





8 592920 089507

ZM5166 1/-/-/5

15 39 084 003

ILVI

EXCLUSIVE

- luminaires in a circular shape with very economical LED
- timer function and smooth dimming
- ability of color setting, and pleasant night lighting
- illumination of the ceiling above the luminaire creates a pleasant halo effect
- 3-year warranty
- use: illumination of interiors in households, office spaces or hotels

- power: 30 W
- replacement of incandescent bulb: 115 W
- luminous flux: 180–1 800 lm
- color temperature: 2 700–6 500 K
- body material: plastic (PS) + steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter
- dimming function
- body colour: white
- line: ILVI
- warranty period: 3 years





8 592920 105924

ZM5168 1/-/-/5

15 39 094 300

EMOS A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging / Type

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 270–2 700 lm
- color temperature: 2 700–6 500 K
- body material: plastic (PS) + steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter
- dimming function
- body colour: white
- line: ILVI
- warranty period: 3 years




270–2 700 lm | 45 W | IP20 | Dimmable 10 %...100 % | 120° | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 3 YEARS WARRANTY

8 592920 105900

ZM5169 1/-/-/5

15 39 094 450

- power: 30 W
- replacement of incandescent bulb: 115 W
- luminous flux: 180–1 800 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter
- dimming function
- body colour: white/wood
- line: ILVI
- warranty period: 3 years




180–1 800 lm | 30 W | IP20 | Dimmable 10 %...100 % | 120° | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 3 YEARS WARRANTY

8 592920 157350

ZM5114 1/-/-/5

15 39 095 300 NEW

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 270–2 700 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter
- dimming function
- body colour: white/wood
- line: ILVI
- warranty period: 3 years




270–2 700 lm | 45 W | IP20 | Dimmable 10 %...100 % | 120° | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 3 YEARS WARRANTY

8 592920 157435

ZM5115 1/-/-/5

15 39 095 450 NEW

- power: 30 W
- replacement of incandescent bulb: 115 W
- luminous flux: 180–1 800 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter
- dimming function
- body colour: black/wood
- line: ILVI
- warranty period: 3 years




180–1 800 lm | 30 W | IP20 | Dimmable 10 %...100 % | 120° | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 3 YEARS WARRANTY

8 592920 157374

ZM5116 1/-/-/5

15 39 096 300 NEW

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 270–2 700 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter
- dimming function
- body colour: black/wood
- line: ILVI
- warranty period: 3 years




270–2 700 lm | 45 W | IP20 | Dimmable 10 %...100 % | 120° | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 3 YEARS WARRANTY

8 592920 157459

ZM5117 1/-/-/5

15 39 096 450 NEW

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 30 W
- replacement of incandescent bulb: 115 W
- luminous flux: 180–1 800 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter
- dimming function
- body colour: black/champagne
- line: ILVI
- warranty period: 3 years




180–1 800 lm | 30 W | IP20 | Dimmable 10 %...100 % | 120° | 3 YEARS WARRANTY

8 592920 157398

ZM5118 | 1/-/-/5

15 39 097 300 | NEW

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 270–2 700 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter
- dimming function
- body colour: black/champagne
- line: ILVI
- warranty period: 3 years




270–2 700 lm | 45 W | IP20 | Dimmable 10 %...100 % | 120° | 3 YEARS WARRANTY

8 592920 157473

ZM5119 | 1/-/-/5

15 39 097 450 | NEW

- power: 30 W
- replacement of incandescent bulb: 115 W
- luminous flux: 180–1 800 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter
- dimming function
- body colour: dřevo
- line: ILVI
- warranty period: 3 years




180–1 800 lm | 30 W | IP20 | Dimmable 10 %...100 % | 120° | 3 YEARS WARRANTY

8 592920 157411

ZM5160 | 1/-/-/5

15 39 098 300 | NEW

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 270–2 700 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter
- dimming function
- body colour: dřevo
- line: ILVI
- warranty period: 3 years




270–2 700 lm | 45 W | IP20 | Dimmable 10 %...100 % | 120° | 3 YEARS WARRANTY

8 592920 157497

ZM5161 | 1/-/-/5

15 39 098 450 | NEW

SABI

EXCLUSIVE

- control via remote control
- adjustable light intensity and color temperature
- option to save favorite settings for quick light scene changes
- timer and night-light function
- easy installation
- 3-year warranty

- power: 30 W
- replacement of incandescent bulb: 110 W
- luminous flux: 180–1 800 lm
- color temperature: 2 700–6 500 K
- body material: plastic (PS) + steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 400 × 60 mm
- dimming function
- body colour: white
- line: SABI
- warranty period: 3 years





8 592920 150139

ZM5111 1/-/-/5

15 39 087 303

- power: 45 W
- replacement of incandescent bulb: 170 W
- luminous flux: 270 - 2 700 lm
- color temperature: 2 700–6 500 K
- body material: plastic (PS) + steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 500 × 70 mm
- dimming function
- body colour: white
- line: SABI
- warranty period: 3 years





8 592920 150153

ZM5112 1/-/-/5


15 39 087 452

REMI

EXCLUSIVE

- control via remote control
- adjustable light intensity and color temperature
- option to save favorite settings for quick light scene changes
- timer and night-light function
- easy installation
- 3-year warranty

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 270–2 700 lm
- color temperature: 2 700–6 500 K
- body material: plastic (PS) + steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 510 × 70 mm
- dimming function
- body colour: white
- line: REMI
- warranty period: 3 years





8 592920 150177

ZM5113 1/-/-/5

15 39 087 453

Luminaires

Surface Luminaires

PROFI

NEXXO

PROFI

- economical surface-mounted luminaires in combination with high quality workmanship
- circular or square shape
- milky diffuser and IP44 degree of protection
- easy installation
- 3-year warranty
- use: corridors in houses, garages, utility rooms

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 40 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109212

ZM5123 1/-/-/8

15 39 087 070

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 40 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124130

ZM5125 1/-/-/8

15 39 085 070 SALE

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109250

ZM5133 1/-/-/8

15 39 087 120

Order Code Item Number	Packaging Type

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 124154

ZM5135 1/-/-/8

15 39 085 120

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 109281

ZM5143 1/-/-/8

15 39 087 210

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 124178

ZM5145 1/-/-/8

15 39 085 210

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 109328

ZM5153 1/-/-/4

15 39 087 280

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 124192

ZM5155 1/-/-/4

15 39 085 280

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter

- body colour: black
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109410

ZM5333 1/-/-/8

15 39 087 122

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 42 mm in diameter

- body colour: black
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109380

ZM5343 1/-/-/8

15 39 087 212

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 42 mm in diameter

- body colour: black
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109342

ZM5353 1/-/-/4

15 39 087 282

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 120 × 40 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109298

ZM6123 1/-/-/8

15 39 087 071

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 120 × 40 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124215

ZM6125 1/-/-/8

15 39 085 071

SALE

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years




1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109243

ZM6133 1/-/-/8

15 39 087 123

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years




1 100 lm | 12.5 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124239

ZM6135 1/-/-/8

15 39 085 121

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 225 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years




1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109205

ZM6143 1/-/-/8

15 39 087 213

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 225 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years




1 900 lm | 21 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124253

ZM6145 1/-/-/8

15 39 085 211

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 300 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years




2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109144

ZM6153 1/-/-/4

15 39 087 283

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 300 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124277

ZM6155 1/-/-/4

15 39 085 281

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm

- body colour: black
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108949

ZM6333 1/-/-/8

15 39 087 125

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 225 × 42 mm

- body colour: black
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108901

ZM6343 1/-/-/8

15 39 087 215

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 300 × 42 mm

- body colour: black
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108864

ZM6353 1/-/-/4

15 39 087 285

TIVI

PROFI

- ceiling lamps with a light source of energy efficiency class A
- light source class B for warm white models
- high luminous efficacy and simple design
- IP44 enclosure ensures water resistance
- easy installation
- use: indoor and outdoor environment of premises and houses

- power: 5.2 W
- replacement of incandescent bulb: 60 W
- luminous flux: 790 lm
- color temperature: 3 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 280 × 80 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



790 lm | 5.2 W | IP44 | Dimmable | 120° | 3 000 K WARM WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 137192

ZM3415 1/-/-/2

15 39 084 050 SALE

- power: 8.6 W
- replacement of incandescent bulb: 90 W
- luminous flux: 1 300 lm
- color temperature: 3 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 325 × 90 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



1 300 lm | 8.6 W | IP44 | Dimmable | 120° | 3 000 K WARM WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 137215

ZM3416 1/-/-/2

15 39 084 080 SALE

- power: 12.5 W
- replacement of incandescent bulb: 130 W
- luminous flux: 1 875 lm
- color temperature: 3 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 100 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



1 875 lm | 12.5 W | IP44 | Dimmable | 120° | 3 000 K WARM WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 137253

ZM3418 1/-/-/2

15 39 084 120 SALE

- power: 5.2 W
- replacement of incandescent bulb: 60 W
- luminous flux: 880 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 280 × 95 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



880 lm | 5.2 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 124819

ZM3405 1/-/-/2

15 39 085 050

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 8.6 W
- replacement of incandescent bulb: 90 W
- luminous flux: 1 440 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 325 × 90 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



1 440 lm | 8.6 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 124833

ZM3406
15 39 085 080

1/-/-/2

- power: 11 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 840 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 100 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



1 840 lm | 11 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 124857

ZM3407
15 39 085 110

1/-/-/2

SALE

- power: 12.5 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 100 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



2 100 lm | 12.5 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 124871

ZM3408
15 39 085 122

1/-/-/2

- power: 19 W
- replacement of incandescent bulb: 170 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 100 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



3 000 lm | 19 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 149249

ZM3409
15 39 085 190

1/-/-/2

- power: 8.6 W
- replacement of incandescent bulb: 90 W
- luminous flux: 1 440 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 325 × 90 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



1 440 lm | 8.6 W | IP44 | Dimmable | 120° | MW Sensor | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 149218

ZM3406M
15 39 085 900

1/-/-/2

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 12.5 W
- replacement of incandescent bulb: 135 W
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 380 × 100 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years



2 100 lm | 12.5 W | IP44 | Dimmable | 120° | MW Sensor | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | ULTRA EFFICIENT

8 592920 149225

ZM3408M 1/-/-/2

15 39 085 130

DIONI

PROFI

- designer luminaire made of high quality plastic
- possibility to change the light colour temperature and light output during installation
- energy efficient
- high IP rating ensuring water resistance
- 2 colour variants
- possibility of hanging installation with optional accessories
- use: indoor and outdoor environment

- power: 15 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 725 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: přisazené/závěsné
- dimensions: diameter 280 × 62 mm
- body colour: white
- line: DIONI
- warranty period: 3 years





1 725 lm | 15 W | IP55 | Dimmable | 110° | 3 000 K 4 000 K 5 700 K | 3 YEARS WARRANTY

8 592920 132999

ZM7150 1/-/-/3

15 39 087 150

- power: 15 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 725 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: přisazené/závěsné
- dimensions: diameter 280 × 62 mm
- body colour: black
- line: DIONI
- warranty period: 3 years





1 725 lm | 15 W | IP55 | Dimmable | 110° | 3 000 K 4 000 K 5 700 K | 3 YEARS WARRANTY

8 592920 133057

ZM7153 1/-/-/3

15 39 087 151

- power: 18 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 160 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: přisazené/závěsné
- dimensions: diameter 360 × 65 mm
- body colour: white
- line: DIONI
- warranty period: 3 years





2 160 lm | 18 W | IP55 | Dimmable | 110° | 3 000 K 4 000 K 5 700 K | 3 YEARS WARRANTY

8 592920 133019

ZM7151 1/-/-/3

15 39 087 180

- power: 18 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 160 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: přisazené/závěsné
- dimensions: diameter 360 × 65 mm
- body colour: black
- line: DIONI
- warranty period: 3 years





8 592920 133071

ZM7154 1/-/-/3

15 39 087 181

- power: 32 W
- replacement of incandescent bulb: 200 W
- luminous flux: 3 520 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: přisazené/závěsné
- dimensions: diameter 410 × 65 mm
- body colour: white
- line: DIONI
- warranty period: 3 years





8 592920 133033

ZM7152 1/-/-/3

15 39 087 320

- power: 32 W
- replacement of incandescent bulb: 200 W
- luminous flux: 3 520 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: přisazené/závěsné
- dimensions: diameter 410 × 65 mm
- body colour: black
- line: DIONI
- warranty period: 3 years





8 592920 133095

ZM7155 1/-/-/3

15 39 087 321

FLERI

PROFI

- modern, durable luminaires for indoor and outdoor areas
- the luminaire features a power switch and color temperature change function
- modular design allows for installation of additional accessories
- option to add a motion sensor and an emergency module
- 5-year warranty
- use: illumination of corridors, basements, common areas, etc.

- power: 8–12–16–20 W
- replacement of incandescent bulb: 120 W
- luminous flux: 2 000 lm
- color temperature: 3 000/4 000/6 500 K
- body material: plastic (ABS)
- color rendering index (CRI): Ra > 80
- motion sensor: optional
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 77 mm in diameter
- body colour: white
- line: FLERI
- warranty period: 5 years
- other functions: P&P MW sensor or EMG kit





8 592920 160855

ZM3012 1/-/-/6

15 39 402 000

NEW

- product: motion sensor
- detection angle: 180°/360°
- detection distance: 8 m
- switching time: 30 s, 1 min, 5 min, 10 min
- IP rating: IP20
- sensor type: microwave
- power source: 12V DC
- packaging: 1 pc, small box
- compatibility: ZM3012
- transmission frequency: 5,8 GHz ±75 MHz
- mounting type: recessed





8 592920 160879

ZM3013 1/-/-/60

15 39 402 010

NEW

- type of emergency operation test: autotest
- IP rating: IP20
- power voltage: 220–240 V AC
- input power: 1 W
- dimensions: 130 × 32 × 23 mm
- mounting type: recessed
- warranty period: 5 years
- backup time: 3 h
- battery type: 18650/3,8 V/ 2 000 mAh
- type of emergency light operation: non-maintained





8 592920 160893

ZM3014 1/-/-/50

15 39 402 020

NEW

Luminaires

Surface Luminaires

CLASSIC

TORI

CLASSIC

- economical surface-mounted luminaires in combination with high quality workmanship
- easy installation thanks to a mounting bracket
- hight luminous efficacy
- easy installation
- 3-year warranty
- use: corridors in houses, garages, utility rooms

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 53 mm in diameter
- body colour: white
- line: TORI
- warranty period: 3 years







8 592920 094082

ZM4121 1/-/-/6

15 39 081 150

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 53 mm in diameter
- body colour: white
- line: TORI
- warranty period: 3 years





1 500 lm | 15 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094167

ZM4321 1/-/-/6

15 39 082 150

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 53 mm in diameter
- body colour: white
- line: TORI
- warranty period: 3 years



2 400 lm | 24 W | IP54 | Dimmable | 120° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 094105

ZM4122 1/-/-/4

15 39 081 240

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 53 mm in diameter
- body colour: white
- line: TORI
- warranty period: 3 years



2 400 lm | 24 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094181

ZM4322 1/-/-/4

15 39 082 240

- power: 36 W
- replacement of incandescent bulb: 215 W
- luminous flux: 3 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years



3 800 lm | 36 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108185

ZM4325 1/-/-/4

15 39 085 360

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 220 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years



1 500 lm | 15 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094204

ZM4323 1/-/-/6

15 39 082 151

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 330 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years



2 400 lm | 24 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094228

ZM4324 1/-/-/4

15 39 082 241

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 220 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years





1 500 lm | 15 W | IP54 | Dimmable | 120° | MW Sensor | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108208

ZM4328 1/-/-/6

15 39 085 150

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 330 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years





2 400 lm | 24 W | IP54 | Dimmable | 120° | MW Sensor | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108222

ZM4329 1/-/-/4

15 39 085 240

DORI

CLASSIC

- ceiling or wall-mounted round/square shaped luminaires
- high luminous efficacy and simple design
- two shapes (round and square)
- IP54 enclosure ensures water resistance
- easy installation
- use: indoor and outdoor environment of premises and houses

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 280 × 55 mm
- body colour: white
- line: DORI
- warranty period: 2 years





1 800 lm | 18 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040546

ZM4311 1/-/-/8

15 39 043 050

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 24.5 W
- replacement of incandescent bulb: 150 W
- luminous flux: 2 450 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 55 mm in diameter
- body colour: white
- line: DORI
- warranty period: 2 years





2 450 lm | 24.5 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040560

ZM4312 | 15 39 043 060 | 1/-/-/8 | SALE

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 280 × 55 mm
- body colour: white
- line: DORI
- warranty period: 2 years



1 800 lm | 18 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040584

ZM4313 | 15 39 043 070 | 1/-/-/8

- power: 24.5 W
- replacement of incandescent bulb: 150 W
- luminous flux: 2 450 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 280 × 55 mm
- body colour: white
- line: DORI
- warranty period: 2 years



2 450 lm | 24.5 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040607

ZM4314 | 15 39 043 080 | 1/-/-/8 | SALE

- power: 18–24 W
- replacement of incandescent bulb: 120 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 280 × 280 × 62 mm
- body colour: white
- line: DORI EVO
- warranty period: 3 years



2 400 lm | 24 W (18/24 W) | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | POWER SWITCH

8 592920 160930

ZM4316 | 15 39 102 420 | 1/-/-/8 | NEW

- power: 18–24 W
- replacement of incandescent bulb: 120 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: diameter 280 × 62 mm
- body colour: white
- line: DORI EVO
- warranty period: 3 years



2 400 lm | 24 W (18/24 W) | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | POWER SWITCH

8 592920 160916

ZM4315 | 15 39 402 420 | 1/-/-/8 | NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 18–24 W
- replacement of incandescent bulb: 150 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 8 m
- type of mounting: surface
- dimensions: diameter 280 × 62 mm
- body colour: white
- line: DORI EVO
- warranty period: 3 years



2 400 lm | 24 W (18/24 W) | IP65 | Dimmable | 120° | MW Sensor | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | POWER SWITCH

8 592920 160954

ZM4317
15 39 402 421

1/-/-/8

NEW

ZURI

CLASSIC

- made of high-quality plastic
- 2in1 - possibility to change the colour of the luminaire body
- energy efficient
- IP54 protection guarantees water resistance
- use: indoor and outdoor environment of premises and houses

- power: 14 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years





1 000 lm | 14 W | IP54 | Dimmable | 120° | 3 000 K WARM WHITE

8 592920 057117

ZM3130
15 39 071 140

1/-/-/6

- power: 14 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years





1 100 lm | 14 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 057155

ZM3230
15 39 072 141

1/-/-/6

- power: 14 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: PIR
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years





1 000 lm | 14 W | IP54 | Dimmable | 120° | PIR Sensor | 3 000 K WARM WHITE

8 592920 057131

ZM3131
15 39 071 240

1/-/-/6

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 14 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: PIR
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years







8 592920 057179

ZM3231
15 39 072 240

1/-/-/6

QARI

CLASSIC

- made of high-quality plastic
- circular and oval design
- energy efficient
- IP65 enclosure ensures water resistance
- use: indoor and outdoor environment of premises and houses

- power: 20 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 78 mm in diameter
- body colour: white
- line: QARI
- warranty period: 2 years







8 592920 062098

ZM3010
15 39 722 000

1/-/-/6

- power: 20 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 270 × 145 × 81 mm
- body colour: white
- line: QARI
- warranty period: 2 years







8 592920 062135

ZM3020
15 39 722 010

1/-/-/8

RORI

CLASSIC

- residential luminaire with night light function - change function via wall switch
- possibility of changing the colour temperature during installation
- energy efficient
- 2 colour variants - white and black
- use: interiors

- power: 17 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 400 lm
- color temperature: 2 700/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 310 × 75 mm
- body colour: white
- line: RORI
- warranty period: 3 years





8 592920 133156

ZM4400
15 39 087 170

1/-/-/3
SALE

- power: 17 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 100 lm
- color temperature: 2 700/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 310 × 75 mm
- body colour: black
- line: RORI
- warranty period: 3 years





8 592920 133170

ZM4401
15 39 087 171

1/-/-/3
SALE

Luminaires

Surface Luminaires

ESSENTIAL

RUBIC

ESSENTIAL

- made of high-quality plastic
- long service life with minimal loss of luminosity
- built-in or surface mounted installation possibility
- high luminous efficiency
- integrated driver
- conservative design
- use: interior lighting in households

- power: 9 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 42 mm in diameter

- body colour: white
- line: RUBIC
- warranty period: 2 years





900 lm | 9 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108505

ZM5432 1/-/-/36

15 39 085 092

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter

- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108468

ZM5442 1/-/-/24

15 39 085 182

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 42 mm in diameter

- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108413

ZM5452 1/-/-/12

15 39 085 242

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm

- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108338

ZM6442 1/-/-/24

15 39 085 183

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 220 × 42 mm

- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108307

ZM6452 1/-/-/12

15 39 085 243

FIONI

ESSENTIAL

- LED luminaire with 12 W, 18 W and 24 W
- neutral white light colour
- energy efficient
- easy installation
- luminous efficacy 100 lm/W

- power: 12 W
- replacement of incandescent bulb: 80 W
- luminous flux: 1 200 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 255 × 63 mm in diameter

- body colour: white
- line: FIONI
- warranty period: 2 years



1 200 lm | 12 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 124574

ZM1120 1/-/-/4

15 39 085 123

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 75 mm in diameter

- body colour: white
- line: FIONI
- warranty period: 2 years



1 800 lm | 18 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 124598

ZM1121 1/-/-/2

15 39 085 184

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 24 W
- replacement of incandescent bulb: 150 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 390 × 80 mm in diameter
- body colour: white
- line: FIONI
- warranty period: 2 years



2 400 lm | 24 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 124611

ZM1122 1/-/-/2

15 39 085 245

FLORI

ESSENTIAL

- quality luminaire with ceiling illumination
- two different designs and two different sizes
- 2 colour variants - white and black
- energy efficient
- easy installation
- use: home interiors

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 293 × 29 mm in diameter
- body colour: white
- line: FLORI
- warranty period: 2 years





1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132340

ZM1400 1/-/-/6

15 39 085 186

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 420 × 29 mm
- body colour: white
- line: FLORI
- warranty period: 2 years





2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132364

ZM1401 1/-/-/6

15 39 085 220

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 293 × 293 × 29 mm
- body colour: white
- line: FLORI
- warranty period: 2 years



1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132388

ZM1402 1/-/-/6

15 39 085 187

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 420 × 420 × 29 mm
- body colour: white
- line: FLORI
- warranty period: 2 years



2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132401

ZM1403 1/-/-/6

15 39 085 221

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 293 × 29 mm in diameter
- body colour: black
- line: FLORI
- warranty period: 2 years





1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132425

ZM1404 1/-/-/6

15 39 085 188

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 420 × 29 mm
- body colour: black
- line: FLORI
- warranty period: 2 years





2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132449

ZM1405 1/-/-/6

15 39 085 222

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 293 × 293 × 29 mm
- body colour: black
- line: FLORI
- warranty period: 2 years





1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132463

ZM1406 1/-/-/6

15 39 085 189

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 420 × 420 × 29 mm
- body colour: black
- line: FLORI
- warranty period: 2 years





2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132487

ZM1407 1/-/-/6

15 39 085 223

Luminaires

Surface Luminaires

Others

- suspension accessories for DIONI luminaires
- easy installation, adjustable height
- possibility to adjust the luminaire height according to ceiling heigh
- available in white and black versions

ZM9000 1/-/-/2

15 90 900 001

8 592920 133118



- product: hanging kit
- material: plastic (PC) + metal
- designed for: LED luminaires
- color: white
- packaging: 1 ks, box

ZM9001 1/-/-/2

15 90 900 002

8 592920 133132



- product: hanging kit
- material: plastic (PC) + metal
- designed for: LED luminaires
- color: black
- packaging: 1 ks, box

Luminaires

Recessed Luminaires

EXCLUSIVE

SIMMI

EXCLUSIVE

- elegant LED spotlights with tilt option
- integrated driver
- in white or with a brushed nickel surface finish
- top-quality and exclusive appearance
- 3-year warranty
- use: indoor and outdoor environment of premises and houses

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 90 × 25 mm in diameter

- mounting hole: 68 mm
- body colour: white
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 054482

ZD3121 1/-/6/60

15 40 115 510

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 90 × 25 mm in diameter

- mounting hole: 68 mm
- body colour: white
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 054512

ZD3122 1/-/6/60

15 40 115 570

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 80 × 25 mm in diameter

- mounting hole: 68 mm
- body colour: brushed nickel
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 054543

ZD3221 1/-/6/60

15 40 125 510

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 80 × 25 mm in diameter
- mounting hole: 68 mm
- body colour: brushed nickel
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 054574

ZD3222 1/-/6/60

15 40 125 570

Luminaires

Recessed Luminaires

PROFI

NEXXO

PROFI

- made of cast aluminium and acrylic glass
- suitable for surface mounting
- high-quality LIFUD drivers
- LGP - PMMA - pleasantly diffused light
- easy installation thanks to the installation console
- 3-year warranty
- use: interior lighting in homes, offices, hotels

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 120 × 21 mm
- mounting hole: 105 × 105 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109120

ZD2323 1/-/-/8

15 40 240 670

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 170 × 21 mm
- mounting hole: 155 × 155 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 050 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109151

ZD2333 1/-/-/8

15 40 241 270

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 225 × 21 mm
- mounting hole: 205 × 205 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 600 lm | 18 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109182

ZD2343 1/-/-/8

15 40 241 870

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 120 × 21 mm
- mounting hole: 105 × 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108772

ZD2125 1/-/-/8

15 40 210 622

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 120 × 21 mm
- mounting hole: 105 × 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





450 lm | 7 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108741

ZD2124 1/-/-/8

15 40 210 612

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 170 × 21 mm
- mounting hole: 155 × 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 050 lm | 12.5 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108840

ZD2135 1/-/-/8

15 40 211 223

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 170 × 21 mm
- mounting hole: 155 × 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 000 lm | 12.5 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108802

ZD2134 1/-/-/8

15 40 211 213

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 225 × 21 mm

- mounting hole: 205 × 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 600 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108918

ZD2145 1/-/-/8

15 40 211 823

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 225 × 21 mm

- mounting hole: 205 × 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 500 lm | 18 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108871

ZD2144 1/-/-/8

15 40 211 813

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 300 × 21 mm

- mounting hole: 280 × 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 100 lm | 25 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108994

ZD2155 1/-/-/4

15 40 212 424

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 300 × 21 mm

- mounting hole: 280 × 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 000 lm | 25 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108956

ZD2154 1/-/-/4

15 40 212 413

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 21 mm in diameter

- mounting hole: 105 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | CCT switch | 3 000 K 3 500 K 4 000 K | 3 YEARS WARRANTY

8 592920 108659

ZD1323 1/-/-/8

15 40 140 670

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 21 mm in diameter

- mounting hole: 155 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





8 592920 108680

ZD1333 1/-/-/8

15 40 141 270

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 21 mm in diameter

- mounting hole: 205 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





8 592920 108710

ZD1343 1/-/-/8

15 40 141 870

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 21 mm in diameter

- mounting hole: 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 108284

ZD1125 1/-/-/8

15 40 110 623

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 21 mm in diameter

- mounting hole: 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 108260

ZD1124 1/-/-/8

15 40 110 613

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 21 mm in diameter

- mounting hole: 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





8 592920 108376

ZD1135 1/-/-/8

15 40 111 224

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 21 mm in diameter
- mounting hole: 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

1 000 lm | 12.5 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY




8 592920 108321

ZD1134 1/-/-/8

15 40 111 214

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 21 mm in diameter
- mounting hole: 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

1 600 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY




8 592920 108444

ZD1145 1/-/-/8

15 40 111 823

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 21 mm in diameter
- mounting hole: 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

1 500 lm | 18 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY




8 592920 108406

ZD1144 1/-/-/8

15 40 111 813

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 21 mm mm in diameter
- mounting hole: 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

2 100 lm | 25 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY



8 592920 108529

ZD1155 1/-/-/4

15 40 112 423

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 21 mm mm in diameter
- mounting hole: 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

2 000 lm | 25 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY



8 592920 108482

ZD1154 1/-/-/4

15 40 112 413

VIXXO

PROFI

- thin, attractive, frameless LED luminaires
- high quality aluminium alloy with white exterior finish
- easy horizontal and vertical installation
- IP65 enclosure ensures water resistance
- 3-year warranty
- use: bathrooms and toilets, kitchen

- power: 6 W
- replacement of incandescent bulb: 42 W
- luminous flux: 500 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 75 × 75 × 20 mm

- mounting hole: 55 × 55 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years







8 592920 068021

ZV2112 1/-/4/20

15 40 210 621

- power: 7,5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 650 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 100 × 100 × 20 mm

- mounting hole: 80 × 80 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years







8 592920 068045

ZV2122 1/-/4/20

15 40 210 820

- power: 10 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 125 × 125 × 20 mm

- mounting hole: 105 × 105 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years







8 592920 068083

ZV2132 1/-/4/16

15 40 211 120

- power: 13.5 W
- replacement of incandescent bulb: 85 W
- luminous flux: 1 250 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 155 × 155 × 20 mm

- mounting hole: 135 × 135 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years







8 592920 068106

ZV2142 1/-/-/10

15 40 211 520

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 19 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 700 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 185 × 185 × 20 mm
- mounting hole: 165 × 165 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





1 700 lm | 19 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 068120

ZV2152 1/-/-/12

15 40 212 220

- power: 6 W
- replacement of incandescent bulb: 42 W
- luminous flux: 500 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 70 × 20 mm in diameter
- mounting hole: 55 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





500 lm | 6 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067888

ZV1112 1/-/4/20

15 40 110 621

- power: 19 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 700 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 185 × 20 mm in diameter
- mounting hole: 165 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





1 700 lm | 19 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067987

ZV1152 1/-/-/12

15 40 112 220

- power: 7,5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 650 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 100 × 20 mm in diameter
- mounting hole: 80 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





650 lm | 7.5 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067901

ZV1122 1/-/4/20

15 40 110 820

- power: 10 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 125 × 20 mm in diameter
- mounting hole: 105 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





900 lm | 10 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067949

ZV1132 1/-/4/16

15 40 111 120

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 13.5 W
- replacement of incandescent bulb: 85 W
- luminous flux: 1 250 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 155 × 20 mm in diameter
- mounting hole: 135 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





1 250 lm | 13.5 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067963

ZV1142 1/-/-/10

15 40 111 520

GERI

PROFI

- ability to tilt up to 90 degrees
- two colour variants
- easy installation
- 3-year warranty
- use: illumination of walls, shelves, paintings

- power: 6.5 W
- replacement of incandescent bulb: 60 W
- luminous flux: 780 lm
- color temperature: 2 700/4 000/6 500 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 36°
- type of mounting: recessed
- dimensions: 105 × 40 mm in diameter
- mounting hole: 87 mm
- dimming function: yes – Triac
- body colour: white
- line: GERI
- warranty period: 3 years





780 lm | 6.5 W | IP20 | Dimmable TRIAC | 36° | 2 700 K 4 000 K 6 500 K | 3 YEARS WARRANTY

8 592920 133194

ZV1160 1/-/-/20

15 40 116 500

- power: 6.5 W
- replacement of incandescent bulb: 55 W
- luminous flux: 700 lm
- color temperature: 2 700/4 000/6 500 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 36°
- type of mounting: recessed
- dimensions: 105 × 40 mm in diameter
- mounting hole: 87 mm
- dimming function: yes – Triac
- body colour: black
- line: GERI
- warranty period: 3 years





700 lm | 6.5 W | IP20 | Dimmable TRIAC | 36° | 2 700 K 4 000 K 6 500 K | 3 YEARS WARRANTY

8 592920 133217

ZV1161 1/-/-/20

15 40 146 500

LORI

PROFI

- IP65 rating ensures water and dust resistance
- equipped with integrated driver
- two color variants
- premium quality and exclusive appearance
- 3-year warranty
- use: bathrooms

- power: 4.5 W
- replacement of incandescent bulb: 30 W
- luminous flux: 345 lm
- color temperature: 2 700/4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: diameter 85 × 29 mm

- mounting hole: 72 mm
- body colour: white
- warranty period: 3 years





345 lm | 4.5 W | IP65 | CCT switch | 2 700 K / 4 000 K | 3 YEARS WARRANTY

8 592920 139349

ZV1163

15 40 116 900

1/-/6/24

SALE

- power: 4.5 W
- replacement of incandescent bulb: 30 W
- luminous flux: 345 lm
- color temperature: 2 700/4 000 K
- body material: plast
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: diameter 85 × 29 mm

- mounting hole: 72 mm
- body colour: black
- warranty period: 3 years





345 lm | 4.5 W | IP65 | CCT switch | 2 700 K / 4 000 K | 3 YEARS WARRANTY

8 592920 139370

ZV1164

15 40 117 000

1/-/6/24

SALE

Luminaires

Recessed Luminaires

ESSENTIAL

RUBIC

ESSENTIAL

- made of high-quality plastic
- designed to be recessed into a plasterboard
- long service life with minimal loss of luminosity
- high luminous efficiency
- conservative design
- integrated driver
- use: interior lighting in households

- power: 9 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 120 × 26 mm in diameter

- mounting hole: 90–110 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





900 lm | 9 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108819

ZD1432 1/-/-/48

15 39 085 090

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 170 × 26 mm in diameter

- mounting hole: 140–160 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108765

ZD1442 1/-/-/32

15 39 085 180

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 220 × 26 mm in diameter

- mounting hole: 190–210 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108703

ZD1452 1/-/-/16

15 39 085 244

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 170 × 170 × 26 mm

- mounting hole: 140–160 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108604

ZD2442 1/-/-/32

15 39 085 181

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 220 × 220 × 26 mm

- mounting hole: 190–210 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108550

ZD2452 1/-/-/16

15 39 085 241

Luminaires

Emergency Luminaires

PROFI

CESSI

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egres from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for functionality testing
- 4-year warranty
- use: industrial buildings, garages, hallways, offices

type of emergency operation test: manual button ▪ light color: cold white ▪ IP rating: IP20 ▪ body material: plastic (PC) ▪ power voltage: 220–240 V AC ▪ input power: 3 W max. ▪ dimensions: 315 × 223 × 45 mm ▪ luminous flux: 30 lm ▪ color temperature: 5 000 K ▪ mounting type: surface-mounted ▪ warranty period: 4 years ▪ backup time: 3 h ▪ battery type: Ni-Cd ▪ battery capacity: 900 mAh ▪ type of emergency light operation: maintained/non-maintained





30 lm | 3 W | IP20 | 5 000 K COOL WHITE | 4 YEARS WARRANTY

8 592920 091043

ZN1210 1/-/-/6

15 48 121 000

type of emergency operation test: autotest ▪ light color: cold white ▪ IP rating: IP20 ▪ body material: plastic (PC) ▪ power voltage: 220–240 V AC ▪ input power: 3 W max. ▪ dimensions: 313 × 212 × 42 mm ▪ luminous flux: 20 lm ▪ color temperature: 6 500 K ▪ mounting type: surface-mounted ▪ warranty period: 4 years ▪ backup time: 3 h ▪ battery type: LiFePo4 ▪ battery capacity: 1 100 mAh ▪ type of emergency light operation: maintained/non-maintained



20 lm | 3 W | IP20 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 159385

ZN1220 | 1/-/-/10

15 48 122 000

NEW

NESSI

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egress from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for testing functionality
- 4-year warranty
- use: industrial buildings, garages, hallways, offices

▪ type of emergency operation test: manual button
▪ light color: cold white
▪ IP rating: IP65
▪ body material: plastic (ABS)
▪ power voltage: 220–240 V AC
▪ input power: 3 W
▪ dimensions: 351 × 111 × 63 mm
▪ luminous flux: 150 lm
▪ color temperature: 6 500 K
▪ mounting type: surface-mounted
▪ warranty period: 4 years
▪ backup time: 3 h
▪ battery type: LiFePo4
▪ battery capacity: 1 500 mAh
▪ type of emergency light operation: maintained/non-



150 lm | 3 W | IP65 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 090640

ZN1110 | 1/-/-/10

15 48 111 000

▪ type of emergency operation test: autotest
▪ light color: cold white
▪ IP rating: IP66
▪ body material: plastic (ABS)
▪ power voltage: 220–240 V AC
▪ input power: 6/10 W max.
▪ dimensions: 321 × 167 × 83 mm
▪ luminous flux: 1 500 lm
▪ color temperature: 6 500 K
▪ mounting type: surface-mounted
▪ warranty period: 4 years
▪ backup time: 3 h
▪ battery type: LiFePo4
▪ battery capacity: 6 600 mAh
▪ type of emergency light operation: non-maintained



1 500 lm | 6/10 W | IP66 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 140727

ZN1120 | 1/-/-/4

15 48 112 000

▪ type of emergency operation test: autotest
▪ light color: cold white
▪ IP rating: IP66
▪ body material: plastic (PC)
▪ power voltage: 220–240 V AC
▪ input power: 3 W max.
▪ dimensions: 252 × 123 × 65 mm
▪ luminous flux: 150 lm
▪ color temperature: 6 500 K
▪ mounting type: surface-mounted
▪ warranty period: 4 years
▪ backup time: 3 h
▪ battery type: LiFePo4
▪ battery capacity: 1 500 mAh
▪ type of emergency light operation: maintained/non-



150 lm | 3 W | IP66 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 140888

ZN2120 | 1/-/-/12

15 48 212 000

- type of emergency operation test: autotest
- light color: cold white
- IP rating: IP66
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 4 W max.
- dimensions: 252 × 123 × 65 mm
- luminous flux: 300 lm
- color temperature: 6 500 K
- mounting type: surface-mounted
- warranty period: 4 years
- backup time: 3 h
- battery type: LiFePo4
- battery capacity: 3 000 mAh
- type of emergency light operation: maintained/non-



300 lm | 4 W | IP66 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 140901

ZN2130 1/-/-/12

15 48 213 000

- body material: steel sheet
- dimensions: 387 × 147 × 30 mm
- mounting type: recessed
- warranty period: 4 years



4 YEARS WARRANTY

8 592920 090817

ZN1111 1/-/-/10

15 48 111 100

SALE

- IP rating: IP65
- body material: plastic (PC)
- dimensions: 351 × 111 × 185 mm
- warranty period: 4 years



IP65 | 4 YEARS WARRANTY

8 592920 090831

ZN1112 1/-/-/8

15 48 111 200

ORSU

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egress from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for testing functionality
- 4-year warranty
- use: industrial and warehouse buildings, corridors, offices

- type of emergency operation test: manual button
- light color: cold white
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 3 W
- dimensions: 140 × 55 mm in diameter
- luminous flux: 240 lm
- color temperature: 6 500 K
- mounting type: recessed
- warranty period: 4 years
- backup time: 3 h
- battery type: LiFePo4
- battery capacity: 1 500 mAh
- type of emergency light operation: non-maintained



240 lm | 3 W | IP20 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 091081

ZN1310 1/-/-/12

15 48 131 000

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- type of emergency operation test: manual button
- light color: cold white
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 6 W max.
- dimensions: 140 × 55 mm in diameter
- luminous flux: 450 lm
- color temperature: 5 000 K
- mounting type: recessed
- warranty period: 4 years
- backup time: 3 h
- battery type: LiFePo4
- battery capacity: 1 500 mAh
- type of emergency light operation: non-maintained





450 lm | 6 W | IP20 | 5 000 K COOL WHITE | 4 YEARS WARRANTY

8 592920 140802

ZN1320 1/-/-/12

15 48 132 000

- type of emergency operation test: autotest
- light color: cold white
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 1 W
- dimensions: diameter 50 × 17 mm
- luminous flux: 130 lm
- color temperature: 6 500 K
- mounting type: recessed
- warranty period: 4 years
- backup time: 3 h
- battery type: LiFePo4
- battery capacity: 1 500 mAh
- type of emergency light operation: non-maintained





130 lm | 1 W | IP20 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 140826

ZN1330 1/-/-/20

15 48 133 000

- type of emergency operation test: autotest
- light color: cold white
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 2 W max.
- dimensions: diameter 95 × 31 mm
- luminous flux: 330 lm
- color temperature: 6 500 K
- mounting type: recessed
- warranty period: 4 years
- backup time: 3 h
- battery type: LiFePo4
- battery capacity: 3 300 mAh
- type of emergency light operation: non-maintained





330 lm | 2 W | IP20 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 140840

ZN1340 1/-/-/8

15 48 134 000

Luminaires

Emergency Luminaires

Emergency conversion kit

- ensuring lighting during a power outage
- automatic switching to emergency mode
- suitable for commercial and industrial spaces
- compatible with selected types of luminaires

- type of emergency operation test: manual button
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 6 W max.
- dimensions: 212 × 73 × 28 mm
- warranty period: 3 years
- backup time: 1 h
- battery type: LiFePo4
- battery capacity: 1 500 mAh



8 592920 086001

ZR9310 1/-/-/20

15 48 931 000

Luminaires

Garden Lighting

EXCLUSIVE

Garden Lighting GoSmart

EMOS GoSmart

- aluminium body and glass milk diffuser
- minimal power consumption, superior durability
- IP65 protection guarantees water resistance
- applications: staircases, outdoor facades, walls
- connection to home network via WiFi
- compatible with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store Google Play

- protocol: WIFI + BLE
- power: 4 W
- luminous flux: 330 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 82 lm/W
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android

- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 25,5 mm
- width: 102 mm
- supply line length: 1.5 m
- number of segments: 1
- maximum number of segments: 6





Wi Fi | IP65 | 20 000 h | 30° | $R_a \geq 80$ | DIMMABLE | CCT | RGB

8 592920 136959

ZIW181R | 1/-/-/8

15 54 181 000 | SALE

- protocol: WIFI + BLE
- power: 14 W
- luminous flux: 990 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 70 lm/W
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android

- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 25,5 mm
- width: 102 mm
- supply line length: 1.5 m
- number of segments: 3
- maximum number of segments: 6





Wi Fi | IP65 | 20 000 h | 30° | $R_a \geq 80$ | DIMMABLE | CCT | RGB

8 592920 136935

ZIW184R | 1/-/-/4

15 54 184 000 | SALE

- protocol: WIFI + BLE
- power: 1.5 W
- luminous flux: 100 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 66 lm/W
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android

- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 57 mm
- width: 57 mm
- supply line length: 1.5 m
- number of segments: 1
- maximum number of segments: 8





Wi Fi | IP65 | 20 000 h | 30° | $R_a \geq 80$ | DIMMABLE | CCT | RGB

8 592920 136911

ZIW191R | 1/-/-/12

15 54 191 000 | SALE

- protocol: WIFI + BLE
- power: 7 W
- luminous flux: 400 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 57 lm/W
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 57 mm
- width: 57 mm
- supply line length: 1.5 m
- number of segments: 4+0+0
- maximum number of segments: 8





Wi Fi | IP65 | 20 000 h | 30° | DIMMABLE | CCT | RGB

8 592920 136898

ZIW194R 1/-/-/6

14 54 194 000

SALE

Luminaires

Garden Lighting

CLASSIC

BRIXO

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 2 light modes
- IP65 rating ensures water and dust resistance
- use: permanent outdoor lighting

- luminous flux: 350 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 138 × 90 × 35 mm
- battery: Li-Ion 1 200 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box





350 lm | IP65 | Outdoor | PIR sensor 120°/max 6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING

8 592920 132647

ZG161S 1/-/4/16

15 53 161 000

- luminous flux: 350 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 138 × 90 × 35 mm
- battery: Li-Ion 1 200 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box





350 lm | IP65 | Outdoor | PIR sensor 120°/max 6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING

8 592920 132661

ZG162S 1/-/4/16

15 53 162 000

- luminous flux: 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 230 × 97 × 43 mm
- battery: Li-Ion 3 000 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 7 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box



900 lm | IP65 | Outdoor | PIR sensor 120°/max 6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING

8 592920 132685

ZG165S 1/-/4/12

15 53 165 000

- luminous flux: 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 230 × 97 × 43 mm
- battery: Li-Ion 3 000 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 7 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box



900 lm | IP65 | Outdoor | PIR sensor 120°/max 6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING

8 592920 132708

ZG166S 1/-/4/12

15 53 166 000

SOLO

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 3 light modes
- IP54 rating ensures water resistance
- use: permanent outdoor lighting

- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 100°
- dimensions: 145 × 136 × 26 mm
- battery: Li-Ion 2 000 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box



1 000 lm | IP54 | Outdoor | PIR sensor 120°/4–6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING | 3 YEARS WARRANTY

8 592920 132548

ZG121S 1/-/4/16

15 52 121 000

- luminous flux: 1 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 100°
- dimensions: 190 × 184 × 28 mm
- battery: Li-Ion 3 600 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box



1 600 lm | IP54 | Outdoor | PIR sensor 120°/4–6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING | 3 YEARS WARRANTY

8 592920 132562

ZG122S 1/-/4/8

15 52 122 000

SPILO

CLASSIC

- remote control operation
- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- multiple installation methods
- use: permanent outdoor lighting

- luminous flux: 1 500 lm
- color temperature: 3 000 K
- light color: warm white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 110°
- dimensions: 180 × 146 × 122 mm
- battery: Li-Ion 3 600 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box





1 500 lm | IP54 | Outdoor | PIR sensor L20°/4–6 m | 3 000 K WARM WHITE | SOLAR CHARGING | 3 YEARS WARRANTY

8 592920 132586

ZG131S 1/-/-/6

15 52 131 000

- luminous flux: 1 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 110°
- dimensions: 180 × 146 × 122 mm
- battery: Li-Ion 3 600 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box





1 500 lm | IP54 | Outdoor | PIR sensor L20°/4–6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING | 3 YEARS WARRANTY

8 592920 132609

ZG132S 1/-/-/6

15 52 132 000

SUNNO

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 3 light modes
- IP54 rating ensures water resistance
- use: permanent outdoor lighting

- luminous flux: 1 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 100°
- dimensions: 181 × 180 × 70 mm
- supply cable length: 1.8 m
- battery: Li-Ion 2 500 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box





1 300 lm | IP54 | Outdoor | PIR sensor L20°/4–6 m | 4 000 K NEUTRAL WHITE | SOLAR CHARGING | 3 YEARS WARRANTY

8 592920 132524

ZG112S 1/-/4/8

15 52 112 000

LUNIS

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- integrated hook for hanging
- IP65 rating ensures water and dust resistance
- use: permanent outdoor lighting

- luminous flux: 220 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 120° × 60°
- dimensions: 139 × 104 × 70 mm
- battery: Li-Ion 1 200 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box







8 592920 132623

ZG151S 1/-/-/6

15 53 151 000

SALVIA

CLASSIC

- wall and pendant lights
- E27 socket (bulb not included)
- steel body in black color
- modern design
- plastic diffuser
- use: suitable for terraces, pergolas, house facades

- colour: black
- dimensions: 208 × 160 × 285 mm
- IP rating: IP44
- power source: 230 V AC
- material: steel
- socket (bulb holder): E27







8 592920 143209

ZGD010P 1/-/-/2

15 54 000 000

- colour: black
- dimensions: 160 × 160 × 760 mm
- IP rating: IP44
- power source: 230 V AC
- material: steel
- socket (bulb holder): E27







8 592920 143223

ZGD070P 1/-/-/2

15 54 001 000

ARTEO

CLASSIC

- wall and post lights
- specific models available with PIR sensor version
- E27 socket (bulb not included)
- stainless steel body in anthracite color
- elegant plastic diffuser
- use: suitable for gardens, terraces, driveways and building facade

---

- colour: anthracite
- dimensions: 164 × 120 × 230 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143247

ZGA010P 1/-/-/4

15 54 000 001

- colour: anthracite
- dimensions: 120 × 120 × 330 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143261

ZGA020P 1/-/-/4

15 54 000 002

- colour: anthracite
- dimensions: 164 × 120 × 295 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- twilight switch
- PIR sensor
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor | PIR sensor

8 592920 143285

ZGA040P 1/-/-/4

15 54 000 003

- colour: anthracite
- dimensions: 120 × 120 × 500 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143308

ZGA0A0P 1/-/-/2

15 54 002 000

- colour: anthracite
- dimensions: 120 × 120 × 800 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143322

ZGA0C0P 1/-/-/2

15 54 002 001

ADENIA

CLASSIC

- wall lights
- specific models available with PIR sensor version
- E27 socket (bulb not included)
- modern aluminum body in black color
- plastic diffuser with lantern appearance
- use: suitable for walls, terraces and building facades

- colour: black
- dimensions: 198 × 150 × 278 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143346

ZGB010P 1/-/-/2

15 54 000 004

- colour: black
- dimensions: 180 × 150 × 245 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143360

ZGB020P 1/-/-/2

15 54 000 005

- colour: black
- dimensions: 198 × 150 × 298 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- twilight switch
- PIR sensor
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor | PIR sensor

8 592920 143384

ZGB040P 1/-/-/2

15 54 000 006

ZALA

CLASSIC

- wall and post lights
- specific models available with PIR sensor version
- E27 socket (bulb not included)
- oval stainless steel body in anthracite color
- plastic diffuser
- use: suitable for building facades, driveways and garden paths

---

- colour: anthracite
- dimensions: 128 × 80 × 230 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143407

ZGC010P 1/-/-/6

15 54 000 007

- colour: anthracite
- dimensions: 128 × 80 × 280 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- twilight switch
- PIR sensor
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor | PIR sensor

8 592920 143421

ZGC040P 1/-/-/3

15 54 000 008

- colour: anthracite
- dimensions: 140 × 140 × 500 mm
- IP rating: IP44
- power source: 230 V AC
- material: stainless steel
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143445

ZGC0A0P 1/-/-/2

15 54 002 002

NIKA

CLASSIC

- wall and post lights
- warm white LED light
- specific models available with PIR sensor version
- anthracite aluminum light body
- square plastic diffuser with rotating joint
- light output up to 900 lm

- colour: anthracite
- dimensions: 120 × 120 × 200 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- luminous flux: 900 lm
- color temperature: 3000 K
- light color: Warm White





8 592920 143469

ZGE014L 1/-/-/6

15 54 112 000

- colour: anthracite
- dimensions: 120 × 120 × 200 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- twilight switch
- luminous flux: 900 lm
- PIR sensor
- color temperature: 3000 K
- light color: Warm White





8 592920 143483

ZGE044L 1/-/-/6

15 54 112 001

- colour: anthracite
- dimensions: 120 × 120 × 500 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- luminous flux: 900 lm
- color temperature: 3000 K
- light color: Warm White





8 592920 143506

ZGE0A4L 1/-/-/2

15 54 112 200

- colour: anthracite
- dimensions: 120 × 120 × 800 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- luminous flux: 900 lm
- color temperature: 3000 K
- light color: Warm White





8 592920 143520

ZGE0C4L 1/-/-/2

15 54 112 201

OCULUS

CLASSIC

- wall lights
- 1 or 2 bulbs with GU10 socket (bulbs not included)
- solid plastic body in black color
- use: modern, minimalist look for all house facades

- colour: black
- dimensions: 88 × 67 × 80 mm
- IP rating: IP44
- power source: 230 V AC
- material: plastic
- socket (bulb holder): GU10





IP44 GU10 Outdoor

8 592920 143544

ZGF010P 1/-/-/16

15 54 020 000

- colour: black
- dimensions: 88 × 67 × 153 mm
- IP rating: IP44
- power source: 230 V AC
- material: plastic
- socket (bulb holder): GU10





IP44 GU10 Outdoor

8 592920 143568

ZGF020P 1/-/-/8

15 54 020 001

CASSIA

CLASSIC

- wall lights
- E27 socket (bulb not included)
- oval aluminum body in anthracite color
- glass diffuser
- use: suitable for building facades

- colour: anthracite
- dimensions: 126 × 95 × 222 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP44 E27 Outdoor Metal body

8 592920 143582

ZGG010P 1/-/-/3

15 54 000 009

MALVA

CLASSIC

- wall lights
- specific models available with PIR sensor version
- E27 socket (bulb not included)
- aluminium body frame in black color
- rectangular plastic diffuser
- use: suitable for modern building facades

- colour: black
- dimensions: 130 × 120 × 250 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143605

ZGH010P 1/-/-/4

15 54 000 010

- colour: black
- dimensions: 130 × 125 × 280 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- twilight switch
- PIR sensor
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor | PIR sensor

8 592920 143629

ZGH040P 1/-/-/4

15 54 000 011

TILLIA

CLASSIC

- wall lights
- E27 socket (bulb not included)
- aluminium body frame in black color
- oval plastic diffuser
- use: suitable for modern building facades

- colour: black
- dimensions: 128 × 110 × 270 mm
- IP rating: IP44
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP44 | Metal body | E27 | Outdoor

8 592920 143643

ZGI010P 1/-/-/3

15 54 000 012

TERION

CLASSIC

- wall and post lights
- integrated PIR sensor
- solar power without the need for electrical connection
- warm white light color
- solid oval metal body in anthracite color
- plastic oval diffuser
- lasts all night

- colour: anthracite
- dimensions: 147 × 125 × 146 mm
- IP rating: IP44
- power source: Li-Ion battery 3,7 V/1 200 mAh
- material: stainless steel
- twilight switch
- photovoltaic cell: 0,88 W
- luminous flux: max. 200 lm
- PIR sensor
- color temperature: 3000 K
- light color: Warm White







8 592920 143667

ZGJ044S 1/-/-/4

15 54 202 000

- colour: anthracite
- dimensions: 125 × 125 × 500 mm
- IP rating: IP44
- power source: Li-Ion battery 3,7 V/1 200 mAh
- material: stainless steel
- twilight switch
- photovoltaic cell: 0,88 W
- luminous flux: max. 200 lm
- PIR sensor
- color temperature: 3000 K
- light color: Warm White







8 592920 143681

ZGJ0B4S 1/-/-/2

15 54 202 200

- colour: anthracite
- dimensions: 125 × 125 × 805 mm
- IP rating: IP44
- power source: Li-Ion battery 3,7 V/1 200 mAh
- material: stainless steel
- twilight switch
- photovoltaic cell: 0,88 W
- luminous flux: max. 200 lm
- PIR sensor
- color temperature: 3000 K
- light color: Warm White







8 592920 143100

ZGJ0F4S 1/-/-/2

15 54 202 201

VEREA

CLASSIC

- wall and post lights
- integrated PIR sensor
- warm white light color
- post light to be stuck into the ground
- solar power without the need for electrical connection
- solid modern metal body in black color
- lasts all night

- colour: black
- dimensions: 154 × 107 × 130 mm
- IP rating: IP44
- power source: Li-Ion battery 3.7 V/2 200 mAh
- material: aluminium (Al)
- twilight switch
- photovoltaic cell: 2.1 W
- luminous flux: max. 460 lm
- PIR sensor
- color temperature: 3000 K
- light color: Warm White



460 lm | IP44 | Metal body | Outdoor | 3 Lighting modes | PIR sensor | SOLAR CHARGING | 3 000 K WARM WHITE

8 592920 143711

ZGK044S 1/-/-/4

15 54 204 000

- colour: black
- dimensions: 154 × 107 × 500 mm
- IP rating: IP44
- power source: Li-Ion battery 3.7 V/2 200 mAh
- material: aluminium (Al)
- twilight switch
- photovoltaic cell: 2.1 W
- luminous flux: max. 460 lm
- PIR sensor
- color temperature: 3000 K
- light color: Warm White



460 lm | IP44 | Metal body | Outdoor | 3 Lighting modes | PIR sensor | SOLAR CHARGING | 3 000 K WARM WHITE

8 592920 143735

ZGK0B4S 1/-/-/4

15 54 204 200

LANA

CLASSIC

- wall and post lights
- E27 socket (bulb not included)
- solid aluminum body in anthracite color
- durable plastic diffuser
- highly waterproof and dustproof
- use: suitable for driveways, garages and house facades

- colour: anthracite
- dimensions: 119 × 106 × 218 mm
- IP rating: IP54
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27



IP54 | Metal body | E27 | Outdoor

8 592920 143827

ZGL010P 1/-/-/8

15 54 000 013

- colour: anthracite
- dimensions: 106 × 88 × 286 mm
- IP rating: IP54
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP54 | Metal body | E27 | Outdoor

8 592920 143841

ZGL020P
15 54 000 014

1/-/-/8

- colour: anthracite
- dimensions: 154 × 133 × 450 mm
- IP rating: IP54
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP54 | Metal body | E27 | Outdoor

8 592920 143865

ZGL0A0P
15 54 002 003

1/-/-/2

- colour: anthracite
- dimensions: 154 × 133 × 750 mm
- IP rating: IP54
- power source: 230 V AC
- material: aluminum
- socket (bulb holder): E27





IP54 | Metal body | E27 | Outdoor

8 592920 143889

ZGL0C0P
15 54 002 004

1/-/-/2

Luminaires

Garden Lighting

ESSENTIAL

LUMI

ESSENTIAL

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 2 light modes
- IP54 rating ensures water resistance
- use: permanent outdoor lighting

- luminous flux: 240 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 120°
- dimensions: 105 × 130 × 80 mm
- battery: Li-Ion 1 200 mAh

- AKU lighting time: 10 hours
- detection range of PIR Sensor: 5 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box









8 592920 132722

ZG172S 1/-/-/12

15 53 172 000

Luminaires

Orientation Luminaires

CLASSIC

AMAL

CLASSIC

- orientation luminaires in brushed aluminium
- designed for recessed mounting
- aluminium body and glass milk diffuser
- superior service life
- minimal power consumption
- IP65 protection guarantees water resistance
- in neutral or warm white color temperature
- use: stairs, exterior facades, walls

- colour: stainless steel
- light color: warm white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 113 × 43 × 65 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 1.5 W

- dimensions: 123 × 53 × 61 mm
- luminous flux: 60 lm
- color temperature: 3 000 K
- source of light: LED
- lifetime: 30 000 hours



60 lm | 1.5 W | IP65 | Dimmable | 3 000 K WARM WHITE

8 592920 037348

ZC0108 | 1/-/-/24

15 45 000 080 | SALE

- colour: stainless steel
- light color: neutral white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 113 × 43 × 65 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2 W

- dimensions: 123 × 53 × 61 mm
- luminous flux: 65 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 30 000 hours



65 lm | 2 W | IP65 | Dimmable | 4 000 K NEUTRAL WHITE

8 592920 054789

ZC0110 | 1/-/-/24

15 45 000 100 | SALE

- colour: stainless steel
- light color: warm white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 75 × 70 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2 W

- dimensions: 80 × 80 × 61 mm
- luminous flux: 65 lm
- color temperature: 3 000 K
- source of light: LED
- lifetime: 30 000 hours



65 lm | 2 W | IP65 | Dimmable | 3 000 K WARM WHITE

8 592920 037355

ZC0109 | 1/-/-/24

15 45 000 090 | SALE

- colour: stainless steel
- light color: neutral white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 75 × 70 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2 W

- dimensions: 80 × 80 × 61 mm
- luminous flux: 65 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 30 000 hours



65 lm | 2 W | IP65 | Dimmable | 4 000 K NEUTRAL WHITE

8 592920 054796

ZC0111 1/-/-/24

15 45 000 110

SALE

ADEL

CLASSIC

- luminaires designed for recessed installation
- minimal electricity consumption
- IP65 protection ensures water resistance
- available in neutral or warm color
- application: illumination of staircases, walls, facades, etc.

- colour: grey
- light color: warm white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 32 mm diameter
- luminous flux: 50 lm
- color temperature: 2 700 K
- source of light: LED
- lifetime: 20 000 hours



50 lm | 2.5 W | IP65 | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY

8 592920 160800

ZCA0313 1/-/-/40

15 45 000 180

NEW

- colour: grey
- light color: neutral white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 32 mm diameter
- luminous flux: 50 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 20 000 hours



50 lm | 2.5 W | IP65 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 160657

ZCA0316 1/-/-/40

15 45 000 190

NEW

- colour: white
- light color: warm white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 80 × 32 mm
- luminous flux: 90 lm
- color temperature: 2 700 K
- source of light: LED
- lifetime: 20 000 hours



90 lm | 2.5 W | IP65 | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY

8 592920 160664

ZCA0123 1/-/-/40

15 45 000 200

NEW


EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- colour: grey
- light color: warm white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 80 × 32 mm
- luminous flux: 50 lm
- color temperature: 2 700 K
- source of light: LED
- lifetime: 20 000 hours





50 lm | 2.5 W | IP65 | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY

8 592920 160671

ZCA0323 1/-/-/40

15 45 000 210 NEW

- colour: white
- light color: neutral white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 80 × 32 mm
- luminous flux: 90 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 20 000 hours





90 lm | 2.5 W | IP65 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY


8 592920 160688

ZCA0126 1/-/-/40

15 45 000 220 NEW

- colour: grey
- light color: neutral white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 80 × 32 mm
- luminous flux: 50 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 20 000 hours





50 lm | 2.5 W | IP65 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 160695

ZCA0326 1/-/-/40

15 45 000 230 NEW

- colour: white
- light color: warm white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 80 × 32 mm
- luminous flux: 90 lm
- color temperature: 2 700 K
- source of light: LED
- lifetime: 20 000 hours





90 lm | 2.5 W | IP65 | Dimmable | PIR Sensor | 2 700 K WARM WHITE | 3 YEARS WARRANTY

8 592920 160701

ZCD0123 1/-/-/40

15 45 000 240 NEW

- colour: grey
- light color: warm white
- IP rating: IP65
- material of the diffuser: plastic (PC)
- body material: aluminum
- mounting hole: 60 - 68 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2.5 W

- dimensions: 80 × 80 × 32 mm
- luminous flux: 50 lm
- color temperature: 2 700 K
- source of light: LED
- lifetime: 20 000 hours





50 lm | 2.5 W | IP65 | Dimmable | PIR Sensor | 2 700 K WARM WHITE | 3 YEARS WARRANTY

8 592920 160718

ZCD0323 1/-/-/40

15 45 000 250 NEW

Luminaires

Cabinet Luminaires

CLASSIC

TIGO

CLASSIC

- energy-saving LED bars for embellishing a closet or kitchen unit
- lenghts from 300 mm to 1 150 mm
- option to interconnect different lenghts
- neutral white colour temperature
- simple installation

- power: 5 W
- length: 300 mm
- luminous flux: 500 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 300 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box





4 000 K NEUTRAL WHITE

8 592920 017913

ZS2110 15 31 211 010 | 1/-/-/30

- power: 10 W
- length: 600 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 600 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box





4 000 K NEUTRAL WHITE

8 592920 017937

ZS2120 15 31 211 020 | 1/-/-/30

- power: 15 W
- length: 860 mm
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 860 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box





4 000 K NEUTRAL WHITE

8 592920 017951

ZS2130 15 31 211 030 | 1/-/-/30

- power: 20 W
- length: 1 150 mm
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 1 150 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°
- packaging: 1 pc, small box



2 000 lm | 20 W | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 017975

ZS2140 1/-/-/30

15 31 211 040

GLASO

CLASSIC

- functional accessory for any bathroom
- combines lighting and decorative function
- available in 3 colors – white, black and silver
- neutral white light color
- easy installation – 4 different mounting options
- IP44 rating for damp environments

- power: 6 W
- length: 300 mm
- luminous flux: 700 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al)
- dimensions: 300 × 128 × 38 mm
- lifetime: 25 000 hours
- beam angle: 120°
- packaging: 1 pc, small box



700 lm | 6 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 151945

ZS2160 1/-/-/6

15 39 300 621

NEW

- power: 10 W
- length: 500 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al)
- dimensions: 500 × 128 × 38 mm
- lifetime: 25 000 hours
- beam angle: 120°
- packaging: 1 pc, small box



1 000 lm | 10 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 151969

ZS2161 1/-/-/6

15 39 301 021

NEW

- power: 6 W
- length: 300 mm
- luminous flux: 700 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al)
- dimensions: 300 × 128 × 38 mm
- lifetime: 25 000 hours
- beam angle: 120°
- packaging: 1 pc, small box



700 lm | 6 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 151983

ZS2163 1/-/-/6

15 39 300 622

NEW

- power: 10 W
- length: 500 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al)
- dimensions: 500 × 128 × 38 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box



1 000 lm | 10 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 152003

ZS2164
15 39 301 022
1/-/-/6
NEW

- power: 6 W
- length: 300 mm
- luminous flux: 700 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al)
- dimensions: 300 × 128 × 38 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box



700 lm | 6 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 152027

ZS2166
15 39 300 623
1/-/-/6
NEW

- power: 10 W
- length: 500 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al)
- dimensions: 500 × 128 × 38 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box



1 000 lm | 10 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 152041

ZS2167
15 39 301 023
1/-/-/6
NEW

Luminaires

Lamps and desk lamps

Floor lamps GoSmart

EMOS GoSmart

- smart control via a mobile application
- ability to adjust light intensity and color
- modern design suitable for any interior
- support for voice control
- energy-efficient operation thanks to LED technology
- ideal for creating a pleasant atmosphere

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

- protocol: WIFI + BLE
- power: 24 W
- luminous flux: 1 000 lm
- color temperature: 2 700 K
- light color: warm white, RGB
- luminous efficacy: 50 lm/W
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android

- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 24 mm
- width: 24 mm
- supply line length: 1.5 m
- number of segments: 4+0+0
- maximum number of segments: 4+0+0





Wi Fi | 24 W | IP20 | Dimmable 10 %...100 % | Timer | 20 000 h | DIMMABLE | CCT | RGB

8 592920 136997

ZCW34BR 1/-/-/2

15 55 034 000

SALE

Desk lamps

- energy-saving and powerful LED lamps as well as classic bulb models
- powered from the mains, via USB, or fully rechargeable models
- practical extras – pencil holder, phone stand or flexible neck
- smart features – memory, dimming, phone charging, color temperature adjustment, enhanced IP44 protection
- ideal for a study, kids' room, or as a modern decorative interior piece

- model: POPPY
- power: 25 W
- colour: white
- supply cable length: 1.5 m
- power adaptor: 220–230 V
- dimensions: 150 × 150 × 400 mm
- packaging: 1 pc, box





E27 | Dimmable

150 cm | max. 25 W

8 592920 149997

Z7640W 1/-/-/3

15 38 201 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: POPPY
- power: 25 W
- colour: pink
- supply cable length: 1.5 m
- power adaptor: 220–230 V
- dimensions: 150 × 150 × 400 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm | max. 25 W

8 592920 150016

Z7640P 1/-/-/3

15 38 201 100

- model: POPPY
- power: 25 W
- colour: green
- supply cable length: 1.5 m
- power adaptor: 220–230 V
- dimensions: 150 × 150 × 400 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm | max. 25 W

8 592920 150030

Z7640GR 1/-/-/3

15 38 201 200

- model: NINA
- power: 25 W
- colour: black
- supply cable length: 1.5 m
- power adaptor: 220–240 V
- dimensions: 150 × 150 × 385 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm | max. 25 W | 3 YEARS WARRANTY

8 592920 150092

Z7642B 1/-/-/2

15 38 201 500

- model: NINA
- power: 25 W
- colour: gold
- supply cable length: 1.5 m
- power adaptor: 220–240 V
- dimensions: 150 × 150 × 400 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm | max. 25 W | 3 YEARS WARRANTY

8 592920 150115

Z7642GL 1/-/-/2

15 38 201 600

- model: TARA
- power: 4.5 W
- luminous flux: 280 lm
- colour: white
- supply cable length: 1.6 m
- power adaptor: 220–240 V
- number of LED: 14
- color temperature: 4 000 K
- dimensions: 130 × 130 × 360 mm
- color rendering index (CRI): Ra > 85
- packaging: 1 pc, box





280 lm | 4.5 W | NEUTRAL WHITE | 160 cm

8 592920 150054

Z7641W 1/-/-/8

15 38 201 400

Order Code Item Number	Packaging Type

- model: TARA
- power: 4.5 W
- luminous flux: 280 lm
- colour: black
- supply cable length: 1.6 m
- power adaptor: 220–240 V
- number of LED: 14
- color temperature: 4 000 K
- dimensions: 130 × 130 × 360 mm
- color rendering index (CRI): Ra > 85
- packaging: 1 pc, box




280 lm | 4.5 W | NEUTRAL WHITE | 160 cm

8 592920 150078

Z7641B 1/-/-/8

15 38 201 300

- model: HENRY
- power: 6.5 W
- luminous flux: 220 lm
- colour: white
- supply cable length: 2 m
- power adaptor: 5 V/1 A
- number of LED: 16
- color temperature: 3 000–6 500 K
- dimensions: 58 × 120 × 505 mm
- color rendering index (CRI): Ra > 85
- packaging: 1 pc, box




220 lm | 6.5 W | Dimmable | max. 4 cm | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 200 cm

8 592920 162316

Z7643W 1/-/-/20

15 38 202 200

NEW

- model: HENRY
- power: 6.5 W
- luminous flux: 220 lm
- colour: black
- supply cable length: 2 m
- power adaptor: 5 V/1 A
- number of LED: 16
- color temperature: 3 000–6 500 K
- dimensions: 58 × 120 × 505 mm
- color rendering index (CRI): Ra > 85
- packaging: 1 pc, box




220 lm | 6.5 W | Dimmable | max. 4 cm | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 200 cm

8 592920 162330

Z7643B 1/-/-/20

15 38 202 300

NEW

- model: ALEX
- power: 9.2 W
- luminous flux: 720 lm
- colour: white
- supply cable length: 1.6 m
- power adaptor: 12 V/650 mA
- number of LED: 88
- color temperature: 3 000–6 000 K
- dimensions: 155 × 155 × 280 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




720 lm | 9.2 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 160 cm

8 592920 162255

Z7644W 1/-/-/4

15 38 201 700

NEW

- model: ALEX
- power: 9.2 W
- luminous flux: 720 lm
- colour: pink
- supply cable length: 1.6 m
- power adaptor: 12 V/650 mA
- number of LED: 88
- color temperature: 3 000–6 000 K
- dimensions: 155 × 155 × 280 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




720 lm | 9.2 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 160 cm

8 592920 162231

Z7644P 1/-/-/4

15 38 201 800

NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: ALEX
- power: 9.2 W
- luminous flux: 720 lm
- colour: blue
- supply cable length: 1.6 m
- power adaptor: 12 V/650 mA
- number of LED: 88
- color temperature: 3 000–6 000 K
- dimensions: 155 × 155 × 280 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

720 lm | 9.2 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 160 cm





8 592920 162279

Z7644BL
15 38 201 900

1/-/-/4
NEW

- model: ALEX
- power: 9.2 W
- luminous flux: 720 lm
- colour: dark grey
- supply cable length: 1.6 m
- power adaptor: 12 V/650 mA
- number of LED: 88
- color temperature: 3 000–6 000 K
- dimensions: 155 × 155 × 280 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

720 lm | 9.2 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 160 cm





8 592920 162293

Z7644G
15 38 202 000

1/-/-/4
NEW

- model: CHASE
- power: 7,2 W
- luminous flux: 450 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 12 V/500 mA
- color temperature: 2 700/4 000/6 500 K
- dimensions: 370 × 340 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

450 lm | 7.2 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm





8 592920 113004

Z7619W
15 38 183 000

1/-/-/8

- model: CHASE
- power: 7,2 W
- luminous flux: 450 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 12 V/500 mA
- color temperature: 2 700/4 000/6 500 K
- dimensions: 370 × 340 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

450 lm | 7.2 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm





8 592920 112984

Z7619B
15 38 182 000

1/-/-/8

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: white
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- number of LED: 12
- color temperature: 4 000 K
- dimensions: 160 × 550 × 345 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

400 lm | 6.5 W | Dimmable | NEUTRAL WHITE | 170 cm





8 592920 079843

Z7602W
15 38 154 000

1/-/-/4

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: black
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- number of LED: 12
- color temperature: 4 000 K
- dimensions: 160 × 550 × 345 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





400 lm | 6.5 W | Dimmable | NEUTRAL WHITE | 170 cm

8 592920 079867

Z7602B 1/-/-/4

15 38 155 000

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: blue
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- number of LED: 12
- color temperature: 4 000 K
- dimensions: 160 × 550 × 345 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





400 lm | 6.5 W | Dimmable | NEUTRAL WHITE | 170 cm

8 592920 079881

Z7602BL 1/-/-/4

15 38 157 000

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: pink
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- number of LED: 12
- color temperature: 4 000 K
- dimensions: 160 × 550 × 345 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





400 lm | 6.5 W | Dimmable | NEUTRAL WHITE | 170 cm

8 592920 079904

Z7602P 1/-/-/4

15 38 156 000

- model: EDDY
- power: 6 W
- luminous flux: 480 lm
- colour: white
- supply cable length: 1.8 m
- power adaptor: 12 V/0.36 A
- number of LED: 24
- color temperature: 3 000/4 500/6 800 K
- dimensions: 170 × 105 × 350 mm
- color rendering index (CRI): Ra > 83
- packaging: 1 pc, box





480 lm | 6 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 180 cm

8 592920 048788

Z7599W 1/-/-/6

15 38 150 201

- model: EDDY
- power: 6 W
- luminous flux: 480 lm
- colour: black
- supply cable length: 1.8 m
- power adaptor: 12 V/0.36 A
- number of LED: 24
- color temperature: 3 000/4 500/6 800 K
- dimensions: 170 × 105 × 350 mm
- color rendering index (CRI): Ra > 83
- packaging: 1 pc, box





480 lm | 6 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 180 cm

8 592920 048764

Z7599B 1/-/-/6

15 38 150 200

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: MOLLY
- power: 12 W
- luminous flux: 650 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 10 V/1 A
- color temperature: 3 000/4 000/6 500 K
- dimensions: 30 cm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




650 lm | 12 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm

8 592920 137895

Z7638W 1/-/-/4

15 38 200 800

- model: MOLLY
- power: 12 W
- luminous flux: 650 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 10 V/1 A
- color temperature: 3 000/4 000/6 500 K
- dimensions: 30 cm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




650 lm | 12 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm

8 592920 137871

Z7638B 1/-/-/4

15 38 200 700

- model: LUCY
- power: 2 W
- luminous flux: 100 lm
- colour: white
- supply cable length: 1 m
- power adaptor: USB
- color temperature: 5 000 K
- dimensions: 80 × 80 × 300 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




100 lm | 2 W | Dimmable | NEUTRAL WHITE | 96 h BATTERY LIFE | 100 cm USB

8 592920 122419

Z7626 1/-/-/6

15 38 190 000

SALE

- model: EMILY
- power: 2 W
- luminous flux: 100 lm
- colour: white
- supply cable length: 1 m
- power adaptor: USB
- color temperature: 5 000 K
- dimensions: 80 × 80 × 300 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




100 lm | 2 W | Dimmable | NEUTRAL WHITE | 96 h BATTERY LIFE | 100 cm USB

8 592920 122426

Z7627 1/-/-/16

15 38 191 000

- model: KATIE
- power: 4 W
- luminous flux: 250 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 5 V/1 A
- color temperature: 3 000/4 000/5 000 K
- dimensions: 330 × 130 × 150 mm
- packaging: 1 pc, box




250 lm | 4 W | Dimmable | IP44 | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 96 h BATTERY LIFE | 150 cm USB

8 592920 122488

Z7630W 1/-/-/2

15 38 196 000

SALE

- model: KATIE
- power: 4 W
- luminous flux: 250 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 5 V/1 A
- color temperature: 3 000/4 000/5 000 K
- dimensions: 330 × 130 × 150 mm
- packaging: 1 pc, box











Z7630B 1/-/-/2

15 38 197 000

SALE

- model: AMY
- power: 6 W
- luminous flux: 200 lm
- colour: white
- supply cable length: 1.2 m
- power adaptor: USB
- color temperature: 3 000–6 500 K
- dimensions: 250 × 240 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box









Z7631 1/-/-/8

15 38 198 000

- model: JASON
- power: 2.2 W
- luminous flux: 180 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: USB
- color temperature: 3 000/4 000/5 000 K
- dimensions: 270 × 130 mm
- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box











Z7633 1/-/-/2

15 38 199 000

- model: GRACE
- power: 4.2 W
- luminous flux: 80 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: USB
- color temperature: 4 000 K
- dimensions: 350 × 130 mm
- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box











Z7634 1/-/-/4

15 38 200 000

- model: SOPHIE
- power: 4.2 W
- luminous flux: 200 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: USB
- color temperature: 4 000 K
- dimensions: 400 × 110 mm
- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box











Z7635W 1/-/-/10

15 38 200 200

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: SOPHIE
- power: 4.2 W
- luminous flux: 200 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: USB
- color temperature: 4 000 K
- dimensions: 400 × 110 mm
- USB port

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





200 lm | 4.2 W | Dimmable | 4 in 1

NEUTRAL WHITE | 33 h BATTERY LIFE | 150 cm USB

8 592920 137758

Z7635B
15 38 200 100

1/-/-/10

- model: ABBIE
- power: 6 W
- luminous flux: 300 lm
- colour: white
- supply cable length: 1,3 m
- power adaptor: USB
- color temperature: 3 000/4 000/6 500 K
- dimensions: 250 × 100 mm
- USB port

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





300 lm | 6 W | Dimmable | 4 in 1

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 10 h BATTERY LIFE | 130 cm USB

8 592920 137796

Z7636W
15 38 200 300

1/-/-/8

- model: ABBIE
- power: 6 W
- luminous flux: 300 lm
- colour: black
- supply cable length: 1,3 m
- power adaptor: USB
- color temperature: 3 000/4 000/6 500 K
- dimensions: 250 × 100 mm
- USB port

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





300 lm | 6 W | Dimmable | 4 in 1

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 10 h BATTERY LIFE | 130 cm USB

8 592920 137819

Z7636B
15 38 200 400

1/-/-/8

- model: KAREN
- power: 9.2 W
- luminous flux: 640 lm
- colour: dark grey
- supply cable length: 1,3 m
- power adaptor: 13,5 V/1 500 mA
- color temperature: 3 000/4 000/6 500 K
- dimensions: 200 × 550 × 700 mm
- USB port: no + wireless charging

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





640 lm | 9.2 W | Dimmable | Wireless charging

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 130 cm

8 592920 097892

Z7615
15 38 176 000

1/-/-/5

- model: OSCAR
- power: 5.5 W
- luminous flux: 360 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 12 V/2 A
- color temperature: 3 000/4 000/5 700 K
- dimensions: 30 cm
- color rendering index (CRI): Ra > 90

- packaging: 1 pc, box





360 lm | 5.5 W | Dimmable | Wireless charging

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm USB | REAL COLORS CRI>90

8 592920 137833

Z7637W
15 38 200 600

1/-/-/2

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: OSCAR
- power: 5.5 W
- luminous flux: 360 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 12 V/2 A
- color temperature: 3 000/4 000/5 700 K
- dimensions: 30 cm
- color rendering index (CRI): Ra > 90
- packaging: 1 pc, box





360 lm | 5.5 W | Dimmable | Wireless charging | Warm White / Neutral White / Cool White | 150 cm USB | Real Colors CRI>90

8 592920 137857

Z7637B 1/-/-/2

15 38 200 500

- model: KYLE
- power: 5.5 W
- luminous flux: 300 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 10 V/3 000 mA
- color temperature: 2 700–4 500 K
- dimensions: 350 mm
- USB port: yes + wireless connection
- color rendering index (CRI): Ra > 90
- packaging: 1 pc, box





300 lm | 5.5 W | Dimmable | 4 Coloured backlight | Wireless charging | Warm White / Neutral White / Cool White | 150 cm | Real Colors CRI>90

8 592920 137918

Z7639 1/-/-/2

15 38 200 900

- model: LEON
- power: 7,1 W
- luminous flux: 240 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 5 V/1 A
- number of LED: 100
- color temperature: 3,000/4,000/5,000/6,300 K
- dimensions: 510 × 71 × 81 mm
- color rendering index (CRI): Ra >95
- packaging: 1 pc, box





240 lm | 7.1 W | Dimmable | 0.7–3.5 cm | Light sensor | Warm White / Neutral White / Cool White | 150 cm USB | Real Colors CRI>95

8 592920 162408

Z7645 1/-/-/8

15 38 202 100

NEW

- model: AVA
- power: 5.6 W
- luminous flux: 200 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: USB
- color temperature: 3 000/4 000/5 000 K
- dimensions: 460 × 105 × 53 mm
- color rendering index (CRI): Ra >95
- packaging: 1 pc, box





200 lm | 5.6 W | Dimmable | Warm White / Neutral White / Cool White | 150 cm USB | Real Colors CRI>95

8 592920 101070

Z7617 1/-/-/10

15 38 179 000

Grow lamps

- growth lamps for germination, seedling development and plant vitality
- effectively replace sunlight on cloudy days and in shaded areas
- timer ensures plants receive exactly the amount of light they need

---

- model: EM101
- power: 5 W
- luminous flux: 235 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: USB-A cable
- number of LED: 15
- color temperature: 3 500 K
- dimensions: 110 × 110 × 220 mm
- color rendering index (CRI): Ra > 85
- packaging: 1 pc, box







8 592920 151266

Z7901 15 38 900 010 | 1/-/-/20 | NEW

- model: EM102
- power: 8 W
- luminous flux: 300 lm
- colour: white
- supply cable length: 1.7 m
- power adaptor: USB-A cable
- number of LED: 39
- color temperature: 3 100 K
- dimensions: 120 × 120 ×195 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box







8 592920 151280

Z7902 15 38 900 020 | 1/-/-/20 | NEW

- model: EM103
- power: 15 W
- luminous flux: 800 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 24 V DC/1000 mA, included
- number of LED: 28
- color temperature: 3 900 K
- dimensions: 536 × 180 × 215 mm
- color rendering index (CRI): Ra >95
- packaging: 1 pc, box







8 592920 151303

Z7903 15 38 900 030 | 1/-/-/10 | NEW

- model: EM104
- power: 7 W
- luminous flux: 300 lm
- colour: white
- supply cable length: 1.7 m
- power adaptor: USB-A cable
- number of LED: 30
- color temperature: 3 200 K
- dimensions: 318 × 134 × 186 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box







8 592920 151327

Z7904 15 38 900 040 | 1/-/-/6 | NEW

- model: EM105
- power: 7 W
- luminous flux: 450 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 24 V DC/1000 mA, included
- number of LED: 21
- color temperature: 3 800 K
- dimensions: 210 × 210 × 517 mm
- color rendering index (CRI): Ra >95
- packaging: 1 pc, box







8 592920 151341

Z7905
15 38 900 050

1/-/-/6
NEW


Luminaires

Sensors

Sensors GoSmart

EMOS GoSmart

- home security and monitoring of surroundings
- motion detection with app notifications
- protection of windows and doors against unauthorized entry
- detection of unusual situations in real time
- connection via ZigBee protocol
- compatible with EMOS GoSmart products and TUYA devices
- voice control support via Google Assistant and Amazon Alexa

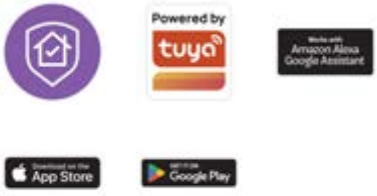

- product: motion sensor
- detection angle: 90°
- detection distance: 8 m
- IP rating: IP20
- sensor type: PIR
- power source: 1× CR123A (3 V)
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- transmission frequency: 2.4 GHz (2 405–2 480 MHz)
- notifications to the mobile app







8 592920 128749

H5020
30 69 052 010

1/-/-/40
SALE

- product: motion sensor
- detection angle: 60°
- detection distance: 8 m
- IP rating: IP20
- sensor type: PIR
- power source: 1× CR123A (3 V)
- packaging: 1 pc, paper box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- transmission frequency: 2,4 GHz ZigBee (IEEE 802.15
- notifications to the mobile app
- mounting type: surface-mounted







8 592920 156490

H5024
30 69 052 040

1/-/-/72
NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: door/window sensor
- IP rating: IP20
- sensor type: magnetic
- power source: 1× CR2032 (3 V)
- packaging: 1 pc, paper box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- transmission frequency: 2,4 GHz ZigBee (IEEE 802.1
- notifications to the mobile app

ZigBee 3.0





8 592920 156506

H5025
30 69 052 050

1/-/-/96
NEW

PIR sensors

- practical solution for automatic lighting control
- reliable detection of people
- high resistance to interference
- helps reduce electricity consumption
- suitable for corridors, staircases, entrances and technical rooms
- easy installation and simple setup
- modern and discreet design

- product: motion sensor
- detection angle: 360°
- detection distance: 3 m
- switching time: 5 s, 30 s, 1 min, 3 min, 5 min, 8 min
- IP rating: IP20
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 800 W
- packaging: 1 pc, small box

5 s – 8 min
PIR Sensor





8 592920 025109

G1110
14 54 007 100

1/-/-/80

- product: motion sensor
- detection angle: 180°
- detection distance: 12 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP44
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: surface-mounted

10 s – 15 min
PIR Sensor





8 592920 032817

G1120
14 54 007 200

1/-/-/40

- product: motion sensor
- detection angle: 180°
- detection distance: 12 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP44
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: surface-mounted

10 s – 15 min
PIR Sensor





8 592920 032831

G1125
14 54 007 250

1/-/-/40

EMOS A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- product: motion sensor
- detection angle: 360°
- detection distance: 3 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 2 000 W
- packaging: 1 pc, small box
- mounting type: surface-mounted




8 592920 025147

G1150 1/-/-/20

14 54 009 200

- product: motion sensor
- detection angle: 360°
- detection distance: 3 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: surface-mounted




8 592920 152089

GS11111 1/-/-/20

14 54 008 200

- product: motion sensor
- detection angle: 180°
- detection distance: 12 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP65
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: surface-mounted




8 592920 152065

GS11151 1/-/-/40

14 54 015 200

NEW

- product: motion sensor
- detection angle: 360°
- detection distance: 10 m
- switching time: min. 30 seconds - max. 60 minutes
- IP rating: IP54
- sensor type: PIR
- power source: 220–240 V~
- packaging: 1 pc, small box
- compatibility: DALI
- protocol: DALI
- mounting type: attached/recessed
- mounting hole: 56–60 mm




8 592920 157152

GS13142 1/-/-/30

14 54 000 100

NEW

- product: motion sensor
- detection angle: 360°
- detection distance: 4 m
- switching time: min. 10 seconds – max. 30 minutes
- IP rating: IP65
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 2 000 W
- packaging: 1 pc, small box
- mounting type: surface-mounted




8 592920 157213

GS11A51 1/-/-/40

14 54 000 400

NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: motion sensor
- detection angle: 360°
- detection distance: 4 m
- switching time: min. 10 seconds – max. 30 minutes
- IP rating: IP65
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 2 000 W
- packaging: 1 pc, small box
- mounting type: surface-mounted





10 s – 30 min | PIR Sensor | 5 YEARS WARRANTY

8 592920 157237

GS11B51
14 54 000 500

1/-/-/40
NEW

- product: motion sensor
- detection angle: 180°/360°
- detection distance: 12 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP65
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: surface-mounted





10 s – 15 min | PIR Sensor | 5 YEARS WARRANTY

8 592920 157251

GS14151
14 54 000 600

1/-/-/40
NEW

- product: motion sensor
- detection angle: 180°/360°
- detection distance: 12 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP65
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: surface-mounted





10 s – 15 min | PIR Sensor | 5 YEARS WARRANTY

8 592920 157275

GS14251
14 54 000 700

1/-/-/40
NEW

- product: motion sensor
- detection angle: 160°
- detection distance: 9 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: recessed





10 s – 15 min | PIR Sensor | 5 YEARS WARRANTY

8 592920 157299

GS15117
14 54 000 800

1/-/-/40
NEW

- product: motion sensor
- detection angle: 360°
- detection distance: 3 m
- switching time: min. 10 seconds – max. 15 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 1 200 W
- packaging: 1 pc, small box
- mounting type: recessed
- mounting hole: 63–66 mm





10 s – 15 min | PIR Sensor | 5 YEARS WARRANTY

8 592920 153680

GS12111
14 54 016 100

1/-/-/36

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- product: motion sensor
- detection angle: 190°
- detection distance: 10 m
- switching time: min. 10 seconds – max. 7 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 220–240 V~
- max. resistive load: 500 W
- packaging: 1 pc, small box

10 s – 7 min | PIR Sensor | 5 YEARS WARRANTY





8 592920 157312

GS15114 | 1/-/-/40

15 45 000 900 | NEW

Microwave sensors

- automatically switch lights on at dusk and turn off at dawn
- ensure convenient and worry-free control of outdoor lighting
- helps to reduce electricity consumption
- ideal for gardens, driveways, entrances and parking areas
- reliable operation under all lighting conditions
- easy installation and simple setup
- practical solution for residential and commercial spaces

- product: motion sensor
- detection angle: 360°
- detection distance: 8 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 230 V~/50 Hz
- max. resistive load: 1 200 W
- packaging: 1 pc, small box

10 s – 12 min | MW Sensor





8 592920 025192

G1210 | 1/-/-/80

14 54 014 100

- product: motion sensor
- detection angle: 360°
- detection distance: 8 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 220–240 V~
- max. resistive load: 1 200 W
- packaging: 1 pc, small box

- mounting type: recessed
- mounting hole: 63–66 mm

10 s – 12 min | MW Sensor | 5 YEARS WARRANTY





8 592920 152102

GS22111 | 1/-/-/24

14 54 013 200

- product: motion sensor
- detection angle: 360°
- detection distance: 3 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 220–240 V~
- max. resistive load: 2 000 W
- packaging: 1 pc, small box

- mounting type: surface-mounted

10 s – 12 min | MW Sensor | 5 YEARS WARRANTY





8 592920 157176

GS31111 | 1/-/-/40

14 54 000 200 | NEW

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- product: motion sensor
- detection angle: 360°
- detection distance: 6 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 220–240 V~
- max. resistive load: 2 000 W
- packaging: 1 pc, small box
- mounting type: recessed
- mounting hole: 63–66 mm





10 s – 12 min | MW Sensor | 5 YEARS WARRANTY

8 592920 157190

GS32111

14 54 000 300

1/-/-/30

NEW

- product: motion sensor
- detection angle: 360°
- detection distance: 8 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 220–240 V~
- max. resistive load: 2 000 W
- packaging: 1 pc, small box
- mounting type: surface-mounted





10 s – 12 min | MW Sensor | 5 YEARS WARRANTY

8 592920 153666

GS21111

14 54 017 100

1/-/-/36

Twilight sensors

- reliability in demanding environments
- instant response – extremely fast detection with no delay
- suitable for automated systems
- universal use in residential and commercial areas
- modern design

- product: dusk sensor
- switching time: 1 hour - 9 hours
- IP rating: IP65
- sensor type: twilight sensor
- power source: 220–240 V~
- max. resistive load: 1 800 W
- packaging: 1 pc, small box
- mounting type: surface-mounted





1 h–9 h | Twilight sensor | 5 YEARS WARRANTY

8 592920 157336

GS41151

14 54 000 110

1/-/-/50

NEW

Luminaires

LED strips

LED strips GoSmart

EMOS GoSmart

- remote control or mobile app operation
- dimming and RGB color change options
- use: illumination of modern interiors and representative spaces
- connection to home network via WiFi
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa


Powered by tuya

Works with Amazon Alexa Google Assistant

App Store Google Play

- protocol: WIFI + BLE
- power: 11 W
- luminous flux: 750 lm
- color temperature: 2 700–6 500 K
- light color: warm white–cool white
- luminous efficacy: 63 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi

- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20/IP44
- length: 2 m
- width: 12 mm
- supply line length: 1.5 m
- number of segments: 10
- maximum number of segments: 10





Wi Fi | 750 lm | 2 m | 11 W | 3 YEARS WARRANTY | DIMMABLE | CCT | RGB


8 592920 120446

ZPW218R 1/-/4/12

15 51 021 800

- protocol: WIFI + BLE
- power: 21 W
- luminous flux: 1 400 lm
- color temperature: 2 700–6 500 K
- light color: warm white–cool white
- luminous efficacy: 62 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi

- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20/IP44
- length: 5 m
- width: 12 mm
- supply line length: 1.5 m
- number of segments: 25
- maximum number of segments: 25





Wi Fi | 1 400 lm | 5 m | 21 W | 3 YEARS WARRANTY | DIMMABLE | CCT | RGB

8 592920 120460

ZPW518R 1/-/4/8

15 51 051 800

- protocol: WIFI + BLE
- power: 23 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20

- length: 3 000 mm
- width: 18 mm
- supply line length: 1.6 m





Wi Fi | 16 milion + colors | RGB IC | Segmented colors | Various shapes | Sound sync | Smart scenarios | DIMMABLE | RGB

8 592920 139448

ZPW313I 1/-/-/5

15 55 313 000

SALE

- protocol: WIFI + BLE
- power: 33 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 5 000 mm
- width: 18 mm
- supply line length: 1.6 m





Wi Fi · 16 million + colors · RGB IC · Segmented colors · Various shapes · Sound sync · Smart scenarios · DIMMABLE · RGB

8 592920 139462

ZPW513I 1/-/-/4

15 55 513 000 SALE

Luminaires

Ambient Lighting

Ambient Lighting GoSmart

EMOS GoSmart

- creating ambient lighting according to mood
- wide range of colors and lighting effects
- control via app or smart assistants
- suitable for interiors as well as decorative lighting
- easy installation and use
- energy-efficient operation thanks to LED technology

Powered by tuya · Works with Amazon Alexa Google Assistant · App Store · Google Play

- protocol: WIFI + BLE
- power: 24 W
- luminous flux: 660 lm
- light color: RGB
- luminous efficacy: 27.5 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- width: 1610 mm
- supply line length: 2.5 m
- number of segments: 120





Wi Fi · Optical sync · Sound sync · Easy to install · Color match · Voice control

8 592920 138847

ZTV75 1/-/-/3

15 51 750 000

- protocol: WIFI + BLE
- power: 24 W
- luminous flux: 610 lm
- light color: RGB
- luminous efficacy: 25.4 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- width: 1390 mm
- supply line length: 2.5 m
- number of segments: 96





Wi Fi · Optical sync · Sound sync · Easy to install · Color match · Voice control

8 592920 138823

ZTV65 1/-/-/3

15 51 650 000

- protocol: WIFI + BLE
- power: 24 W
- luminous flux: 450 lm
- light color: RGB
- luminous efficacy: 18.75 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- width: 1170 mm
- supply line length: 2.5 m
- number of segments: 72




Wi Fi, Optical sync, Sound sync, Easy to install, Color match, Voice control

8 592920 138809

ZTV55 1/-/-/3

15 51 550 000

- protocol: WIFI + BLE
- power: 5.5 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1 m
- number of segments: 6
- maximum number of segments: 6




Wi Fi, 16 milion + colors, RGB IC, Segmented colors, Various shapes, Sound sync, Smart scenarios, DIMMABLE, RGB

8 592920 139523

ZIW426R 1/-/-/6

15 55 426 000

SALE

- protocol: WIFI + BLE
- power: 34 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1.5 m
- number of segments: 18
- maximum number of segments: 18




Wi Fi, 16 milion + colors, RGB IC, Segmented colors, Various shapes, Sound sync, Smart scenarios, DIMMABLE, RGB

8 592920 139547

ZIW269R 1/-/-/6

15 55 269 000

SALE

- protocol: WIFI + BLE
- power: 34 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1.5 m
- number of segments: 18
- maximum number of segments: 18




Wi Fi, 16 milion + colors, RGB IC, Segmented colors, Various shapes, Sound sync, Smart scenarios, DIMMABLE, RGB

8 592920 139561

ZIW249R 1/-/-/6

15 55 249 000

SALE

- protocol: WIFI + BLE
- power: 19 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1.5 m
- number of segments: 10
- maximum number of segments: 19



Wi Fi, 16 milion + colors, RGB IC, Segmented colors, Various shapes, Sound sync, Smart scenarios, DIMMABLE, RGB

8 592920 139486

ZIW22AR 1/-/-/2

15 55 022 000

SALE

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- protocol: WIFI + BLE
- power: 1.8 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- number of segments: 3
- maximum number of segments: 19





Wi Fi | 16 milion + colors | RGB IC | Segmented colors | Various shapes | Sound sync | Smart scenarios | DIMMABLE | RGB

8 592920 139509

ZIW223R
15 55 223 000

1/-/-/10
SALE

- protocol: WIFI + BLE
- power: 12 W
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- supply line length: 1.5 m
- number of segments: 15
- maximum number of segments: 15





Wi Fi | 15× | 12 W | V A Function | Dimmable 10 %...100 % | Timer | 20 000 h | RGB

8 592920 136973

ZIW17FR
15 55 017 000

1/-/-/8
SALE

- protocol: WIFI + BLE
- power: 7 W
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 2 550 mm
- supply line length: 2 m
- number of segments: 12
- maximum number of segments: 24





Wi Fi | 16 milion + colors | RGB IC | Segmented colors | Various shapes | Sound sync | Smart scenarios | DIMMABLE | CCT | RGB

8 592920 139400

ZIW15CR
15 55 015 000

1/-/-/4
SALE

- protocol: WIFI + BLE
- power: 1.9 W
- color temperature: 3 000–6 500 K
- light color: RGBIC
- colour settings (RGB)
- colour settings (RGBIC)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 850 mm
- number of segments: 4+0+0
- maximum number of segments: 24





Wi Fi | 16 milion + colors | RGB IC | Segmented colors | Various shapes | Sound sync | Smart scenarios | DIMMABLE | CCT | RGB

8 592920 139424

ZIW154R
15 55 154 000

1/-/-/16
SALE

- protocol: WIFI + BLE
- power: 7 W
- luminous flux: 330 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 47 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 92 mm
- width: 175 mm
- supply line length: 1.5 m





Wi Fi | 7 W | IP20 | Dimmable | 330 lm | 20 000 h | R$_a$ ≥ 80 | DIMMABLE | CCT | RGB

8 592920 133767

ZCW11WR
15 55 111 000

1/-/-/4

www.emos.eu | Order Code Item Number | Packaging Type

- protocol: WIFI + BLE
- power: 7 W
- luminous flux: 330 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 47 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 92 mm
- width: 175 mm
- supply line length: 1.5 m



Wi Fi | 7 W | IP20 | Dimmable | 330 lm | 20 000 h | DIMMABLE | CCT | RGB

8 592920 133743

ZCW11BR 1/-/-/4

15 55 110 000

Luminaires

Batten luminaires

PROFI PLUS

PANO

PROFI PLUS

- option for surface mounting
- easy connection thanks to a separate driver
- ready for continuous installation in linear connection
- high light efficiency 140 lm/W
- 5-year warranty
- use: illumination of corridors, supermarkets and warehouses

- dimensions: 600 × 65 × 66 mm
- power: 10–13–16–20 W
- luminous flux: 2 700 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- through-wiring
- working temperature range: -20 °C to +40 °C
- material: plastic/metal
- clip material: no clips
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



2 700 lm | 20 W | IP20 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 140741

ZAB101 1/-/-/12

15 46 101 000

- dimensions: 1 200 × 65 × 66 mm
- power: 20–25–35–40 W
- luminous flux: 5 600 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- through-wiring
- working temperature range: -20 °C to +40 °C
- material: plastic/metal
- clip material: no clips
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



5 600 lm | 40 W | IP20 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 140765

ZAB102 1/-/-/6

15 46 102 001

- dimensions: 1 500 × 65 × 66 mm
- power: 25–35–40–50 W
- luminous flux: 7 000 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- through-wiring
- working temperature range: -20 °C to +40 °C
- material: plastic/metal
- clip material: no clips
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box




7 000 lm | 50 W | IP20 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 140789

ZAB103 1/-/-/6

15 46 103 000

Luminaires

Batten luminaires

ESSENTIAL

MINO

ESSENTIAL

- option for surface mounting
- easy connection thanks to a separate driver
- body and diffuser made of plastic
- use: illumination of corridors, supermarkets, and warehouses

- dimensions: 600 × 75.5 × 24.5 mm
- power: 20 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- working temperature range: -20 °C to +40 °C
- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V~
- protection class: II
- packaging: 1 pc, box




20 W | 2 200 lm | IP20 | 25 000 h | 4 000 K NEUTRAL WHITE

8 592920 141793

ZAB901 1/-/-/30

15 46 901 000

- dimensions: 1 200 × 75.5 × 24.5 mm
- power: 40 W
- luminous flux: 4 400 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- working temperature range: -20 °C to +40 °C
- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V~
- protection class: II
- packaging: 1 pc, box



40 W | 4 400 lm | IP20 | 25 000 h | 4 000 K NEUTRAL WHITE

8 592920 141809

ZAB902 1/-/-/30

15 46 902 000

- dimensions: 1 500 × 75.5 × 24.5 mm
- power: 50 W
- luminous flux: 5 500 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- working temperature range: -20 °C to +40 °C
- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V~
- protection class: II
- packaging: 1 pc, box



50 W | 5 500 lm | IP20 | 25 000 h | 4 000 K NEUTRAL WHITE

8 592920 141823

ZAB903 1/-/-/30

15 46 903 000

MANO

ESSENTIAL

- option for surface mounting
- easy connection thanks to a separate driver
- ready for continuous installation in linear connection
- use: lighting for corridors, supermarkets, and warehouses

- dimensions: 600 × 62 × 55 mm
- power: 20 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- through-wiring
- working temperature range: -20 °C to +40 °C
- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V~
- protection class: II
- packaging: 1 pc, blister



2 200 lm | 20 W | IP20 | 25 000 h | 4 000 K NEUTRAL WHITE

8 592920 147481

ZAB911 1/-/-/15

15 46 911 000

- dimensions: 1 200 × 62 × 55 mm
- power: 40 W
- luminous flux: 4 400 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- through-wiring
- working temperature range: -20 °C to +40 °C
- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V~
- protection class: II
- packaging: 1 pc, blister



4 400 lm | 40 W | IP20 | 25 000 h | 4 000 K NEUTRAL WHITE

8 592920 147504

ZAB912 1/-/-/15

15 46 912 000

- dimensions: 1 500 × 62 × 55 mm
- power: 60 W
- luminous flux: 6 600 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP20
- through-wiring
- working temperature range: -20 °C to +40 °C
- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V~
- protection class: II
- packaging: 1 pc, blister



6 600 lm | 60 W | IP20 | 25 000 h | 4 000 K NEUTRAL WHITE

8 592920 147528

ZAB913 1/-/-/15

15 46 913 000

Decorations

Nano chains

Nano battery chains

- subtle LED diodes gently enliven any space
- thin wire can be shaped exactly the way you need
- various colors of light and wire

D3ZW01 1/-/-/40

15 50 030 032

8 592920 135280





- product: nano chain
- light color: warm white
- dimensions: 12 m
- area of use: both outdoor and indoor
- timer
- function: glowing
- number of LED: 120
- supply line length: 3 m
- cable colour: copper
- power: 2.4 W
- IP rating: IP44
- lifetime: 10 000 hours

D3ZC01 1/-/-/40

15 50 032 009

8 592920 135303





- product: nano chain
- light color: cool white
- dimensions: 12 m
- area of use: both outdoor and indoor
- timer
- function: glowing
- number of LED: 120
- supply line length: 3 m
- cable colour: silver
- power: 2.4 W
- IP rating: IP44
- lifetime: 10 000 hours

Decorations


Cherry chains

Cherry chains 25 mm

- ideal for decorating indoor and outdoor spaces
- timer function for scheduled on/off
- length 4 m, various color lighting options

D5AC01 1/-/-/16

15 50 052 004



- product: chain
- light color: cool white
- dimensions: 4 m
- area of use: both outdoor and indoor
- timer
- function: glowing
- number of LED: 40
- supply line length: 5 m
- cable colour: white
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AW01 1/-/-/16

15 50 050 004



- product: chain
- light color: warm white
- dimensions: 4 m
- area of use: both outdoor and indoor
- timer
- function: glowing
- number of LED: 40
- supply line length: 5 m
- cable colour: white
- power: 2.6 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AM01 1/-/-/16

15 50 054 006



- product: chain
- light color: multicolor
- dimensions: 4 m
- area of use: both outdoor and indoor
- timer
- function: glowing
- number of LED: 40
- supply line length: 5 m
- cable colour: white
- power: 2.5 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AP01 1/-/-/16

15 50 055 002



- product: chain
- light color: pink
- dimensions: 4 m
- area of use: both outdoor and indoor
- timer
- function: glowing
- number of LED: 40
- supply line length: 5 m
- cable colour: white
- power: 2.5 W
- IP rating: IP44
- lifetime: 10 000 hours

Decorations

Decorations

Party

- suitable for indoor and outdoor use
- high IP44 rating withstands bad weather
- wide color selection for every occasion
- brightens up any garden or terrace

DCPV01

15 50 001 023

8 592920 099070

1/-/-/8

SALE

230 V AC/ 5 V DC

IN/OUT



- product: garland
- light color: vintage
- dimensions: 4.5 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 100
- supply line length: 5 m
- power: 5 W
- IP rating: IP44
- lifetime: 10 000 hours
- packaging: 1 pc, box

DCPW01

15 50 000 000

8 592920 093207

1/-/-/6

SALE

230 V AC/ 24 V DC

IN/OUT



- product: garland
- light color: warm white
- dimensions: 5 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 50
- supply line length: 5 m
- power: 5 W
- IP rating: IP44
- lifetime: 10 000 hours
- packaging: 1 pc, box

DCPW02

15 50 000 001

8 592920 093214

1/-/-/6

SALE

230 V AC/ 24 V DC

IN/OUT



- product: garland
- light color: warm white
- dimensions: 5 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 50
- supply line length: 5 m
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours
- packaging: 1 pc, box

DCPZ01

15 50 005 000

8 592920 094020

1/-/-/2

SALE

230 V AC

IN/OUT



- dimensions: 7.35 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- supply line length: 5 m
- power: 750 W max.
- IP rating: IP44
- lifetime: 10 000 hours
- packaging: 1 pc, box

Lantern

- practical power supply using commonly available batteries
- suitable for indoor use – IP20 protection rating
- pleasant vintage-style light ideal for relaxation
- lanterns include a practical timer function, so you don't have to think about switching them on or off every day

DCLV01 1/-/-/15

15 50 001 013

8 592920 093771

3× AAA Indoor



- product: lantern
- light color: vintage
- dimensions: 10.5 × 24 cm
- area of use: indoor
- timer
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 1 pc, box

DCLV02 1/-/-/15

15 50 001 014

8 592920 093788

3× AAA Indoor



- product: lantern
- light color: vintage
- dimensions: 10.5 × 24 cm
- area of use: indoor
- timer
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 1 pc, box

LED candles

- decorative and tealight candles for indoor use, graveyard candles for outdoor use
- modern features – flame effect, remote control, dusk sensor or timer
- the timer ensures the candle turns on automatically and switches off after the set time
- practical power supply using commonly available batteries

DCCV25 1/-/-/6

15 50 000 196

NEW

8 592920 159255

6× AA Indoor



- product: candle
- light color: warm white
- dimensions: 7,5 × 10 cm/12,5 cm
- area of use: indoor
- timer
- remote control: yes (1× CR2025, include
- number of LED: 2× 1
- power: 0.006 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 2 pcs, small box

DCCW05 1/-/-/8

15 50 000 181

8 592920 147436

6× AA Indoor



- product: candle
- light color: warm white
- dimensions: 7.5 × 10/12.5/15 cm
- area of use: indoor
- timer
- remote control: no
- number of LED: 3× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 3 pcs, small box

DCCV07 1/-/-/8

15 50 001 006

SALE

8 592920 093702

3× 3 AAA Indoor



- product: candle
- light color: vintage
- dimensions: 7.5 × 10/12.5/15 cm
- area of use: indoor
- timer
- remote control: yes (1× CR2032, include
- number of LED: 3× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 3 pcs, small box

DCCV17 2/-/-/8

15 50 001 032

8 592920 135105

2× 2 AAA Indoor



- product: candle
- light color: warm white
- dimensions: 7.5 × 7.5 × 17 cm
- area of use: indoor
- timer
- remote control: no
- number of LED: 2× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 2 pcs, small box

EMOS

www.emos.eu

Order Code
Item Number

Packaging
Type

DCCV11

6/-/-/216

15 50 001 010

8 592920 093740



- product: candle
- light color: vintage
- dimensions: 3.8 × 3.8 cm
- area of use: indoor
- timer: no
- remote control: no
- number of LED: 6× 1
- power: 0,015 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 6 pcs, small box

DCCV12

6/-/-/216

15 50 001 011

8 592920 093757



- product: candle
- light color: vintage
- dimensions: 3.8 × 3.8 cm
- area of use: indoor
- timer: no
- remote control: no
- number of LED: 6× 1
- power: 0,015 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 6 pcs, small box

DCCV13

6/-/-/216

15 50 001 012

8 592920 093764



- product: candle
- light color: vintage
- dimensions: 3.8 × 3.8 cm
- area of use: indoor
- timer: no
- remote control: no
- number of LED: 6× 1
- power: 0,015 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 6 pcs, small box

DCCV16

4/-/-/96

15 50 001 031

8 592920 122082



- product: candle
- light color: vintage
- dimensions: 5,8 × 4,8 cm
- area of use: indoor
- timer: no
- remote control: no
- number of LED: 4× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours
- packaging: 4 pcs, small box

DCCV19

1/-/-/35

15 50 000 056

8 592920 098295



- product: grave candle
- light color: warm white
- dimensions: 7 × 12.5 cm
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 1
- power: 0,02 W
- IP rating: IP44
- lifetime: 10 000 hours
- packaging: 1 pc, box

DCCV20

1/-/-/35

15 50 000 057

8 592920 098318



- product: grave candle
- light color: warm white
- dimensions: 7 × 12.5 cm
- area of use: both outdoor and indoor
- timer: sensor
- remote control: no
- number of LED: 1
- power: 0,02 W
- IP rating: IP44
- lifetime: 10 000 hours
- packaging: 1 pc, box

DCCV21

1/-/-/24

15 50 001 024

8 592920 099094



- product: grave candle
- light color: vintage
- dimensions: 7 × 12.5 cm
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 1
- power: 0,02 W
- IP rating: IP44
- lifetime: 10 000 hours
- packaging: 1 pc, box

DCCV22

1/-/-/24

15 50 001 029

SALE

8 592920 111383



- product: grave candle
- light color: vintage
- dimensions: 7.5 × 25 cm
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP44
- lifetime: 1 500 hours
- packaging: 1 pc, box

Decorations

Accesories

- practical accessories make your work easier
- adhesive hooks can be used throughout the entire household

DCH001 10/-/-/960

15 50 090 001

8 592920 149539

IN/OUT



- material: plastic
- colour: transparent
- type of mounting: gluing
- using: indoor
- packaging: 10 pcs, packet

DCH002 10/-/-/480

15 50 090 002

8 592920 149553

IN/OUT

- material: plastic
- colour: transparent
- type of mounting: gluing, screwing
- using: indoor
- packaging: 10 pcs, packet

Weather stations, thermometers, scales, others



Weather stations

Weather stations GoSmart

EMOS GoSmart

- can evaluate current weather and predict its further development
- display temperature and humidity and exact date and time
- wireless communication with up to 3 sensors
- large color display, LED backlight (perm/temp)
- connection to home network via WiFi
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

LED backlight display ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ possible additional sensor: up to 3 sensors (E00387, E05018, E00032) ▪ main unit size: 205 × 29 × 127 mm ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ other functions: USB-A power output ▪ protocol: Wi-Fi ▪ notifications to the mobile app





Wi Fi | Comfort view | °C IN/OUT | % IN/OUT | Wifi controlled | 5 days Forecast | Temperature alarm | Graph history | 5 V DC/ 1 000 mA | 1× USB-A

8 592920 136089

E8610 1/-/-/10

26 06 183 000

LED backlight display ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ barometer ▪ rain gauge ▪ anemometer ▪ moon phase ▪ main unit size: 189 × 21 × 119 mm ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ notifications to the mobile app





Wi Fi | Comfort view | °C IN/OUT | % IN/OUT | Wifi controlled | hPa | Temperature alarm | 5 V/1.2 A USB C port | 3× AA

8 592920 150481

E6001 1/-/-/2

26 06 187 000

NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

outdoor temperature: 1. -40 °C to +70 °C, resolution 0.1 °C; 2. -40 °C to +70 °C, resolution 0,1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ weather forecast: yes – only in app ▪ temperature warning: yes - only in the application ▪ rain gauge ▪ anemometer ▪ possible additional sensor: 3 (E06000) ▪ main unit size: 60 × 60 × 61 mm ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ notifications to the mobile app





Wi Fi | °C OUT | % OUT | Wifi controlled | Anemometer | 230 V AC | 3× AA | 2× AA

8 592920 150498

E6000
26 06 188 000

1/-/-/2
NEW

Weather stations

- can evaluate current weather and predict its further development
- display temperature and humidity (in and out), time and date
- wireless comm. with up to 3 sensors (powered by AA or AAA)
- large color display, LED backlight (perm/temp)
- with stand/for hanging on the wall, +battery or mains powered

LED backlight display ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -30 °C to +60 °C, resolutions 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ rain gauge ▪ anemometer ▪ altitude adjustment ▪ moon phase ▪ possible additional sensor: up to 3 temperature and humidity sensors (E06018), 1 anenometer sensor (E06016) ▪ main unit size: 17 × 192 × 127 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 300 mA | 4× AA | 3× AAA

8 592920 081235

E6016
26 06 164 000

1/-/-/1

LED backlight display ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ pressure trend ▪ barometer ▪ moon phase ▪ possible additional sensor: 3 (E05018) ▪ wired probe for sensor: 0.95 m ▪ main unit size: 26 × 197 × 125 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 600 mA | 3× AAA | 2× AAA

8 592920 104101

E5111
26 06 170 000

1/-/-/8

LED backlight display ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ altitude adjustment ▪ moon phase ▪ possible additional sensor: 3 (E06018) ▪ main unit size: 17 × 192 × 127 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 300 mA | 3× AAA | 2× AAA

8 592920 081211

E6018
26 06 162 000

1/-/-/12

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

LED backlight display ▪ alarm clock ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ possible additional sensor: yes, 1 sensor (E05018) ▪ main unit size: 20 × 85 × 96 mm ▪ other functions: –





Comfort view | °C IN/OUT | % IN/OUT | 5 V/1 A USB C port | 2× AAA | 2× AAA

8 592920 149126

E8647N
26 06 184 000

1/-/-/20

LED backlight display ▪ alarm clock ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ possible additional sensor: yes, 1 sensor (E05018) ▪ main unit size: 85 ×20 × 96 mm





Comfort view | °C IN/OUT | % IN/OUT | 5 V/1 A USB C port | 2× AAA | 2× AAA

8 592920 150429

E8647W
26 06 185 000

1/-/-/20

LED backlight display ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 99 % RH, resolution 1 % ▪ indoor humidity: 20 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ barometer ▪ moon phase ▪ possible additional sensor: 3 (E00387, E05018) ▪ main unit size: 155 × 50 × 113 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 1 000 mA | 2× AAA

8 592920 136188

E8620
26 06 181 000

1/-/-/12

LED backlight display ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ pressure trend ▪ barometer ▪ possible additional sensor: 3 (E00387, E05018) ▪ main unit size: 198 × 30 × 132 mm ▪ other functions: USB-A power output





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 1 000 mA | 2× AAA

8 592920 136171

E8614
26 06 182 000

1/-/-/10

LED backlight display ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -30 °C to +60 °C, resolutions 0.1 °C ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 20 % to 90 % RH, resolution 1 % ▪ weather forecast ▪ moon phase ▪ possible additional sensor: 3 (E03070) ▪ main unit size: 54 × 139 × 101 mm





DCF | °C IN/OUT | % IN | 3× AAA | 2× AAA

8 592920 010785

E3070
26 06 139 000

1/-/-/18

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ moon phase ▪ possible additional sensor: up to 3 sensors (E05018, E00387) ▪ main unit size: 23 × 76 × 126 mm





DCF | °C IN/OUT | % IN/OUT | 2× AA | 2× AAA

8 592920 090039

E0352 1/-/-/20

26 06 166 000

LED backlight display ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -2 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ moon phase ▪ possible additional sensor: 3 (E00387, E05018) ▪ main unit size: 133 × 125 × 110 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | PU cover | 2× AA | 2× AAA | Qi wireless charging

8 592920 123249

E8010 1/-/-/6

26 06 179 000

date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ moon phase ▪ possible additional sensor: 3 (E00387, E05018) ▪ main unit size: 215 × 18 × 113 mm





DCF | °C IN/OUT | % IN/OUT | 3× AA | 2× AA

8 592920 136164

E0531 1/-/-/20

26 06 180 000

LED backlight display ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 99 % RH, resolution 1 % ▪ indoor humidity: 20 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ moon phase ▪ possible additional sensor: 3 (E05018) ▪ main unit size: 284 × 25 × 107 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | 5 V DC/ 1 000 mA | 3× AAA | 2× AAA

8 592920 150474

E8625 1/-/-/10

26 06 186 000

NEW

Thermometers

Thermometers

- digitally display indoor and outdoor temperature, humidity and other parameters
- wireless or with probe (wire-connected, outside a window)
- measures indoor humidity via integrated sensor in the body unit
- additional functions on selected models (e.g. calendar or alarm clock)
- can be hang on a wall, a window or placed on a stand

thermometer design: wireless ▪ clock: yes, quartz ▪ LED backlight display ▪ date ▪ alarm clock ▪ snooze ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 10 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ power of station: 1× 1.5 V AA (not included) ▪ main unit size: 88 × 37 × 86 mm ▪ screen size: 75 × 64 mm





Max/Min | °C IN | % IN | 1× AA 1.5 V

8 592920 150436

E0114N 1/-/-/20

26 03 124 000

thermometer design: wireless ▪ magnet for fixing ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 20 % to 90 % RH, resolution 1 % ▪ the possibility of hanging on the wall ▪ power of station: 1× 3 V CR2032 (included) ▪ main unit size: 46 × 16 × 62 mm ▪ screen size: 34 × 41 mm





°C IN | % IN | 1× 3 V CR2032 included | Magnetic

8 592920 123256

E0345 1/-/50/100

26 03 203 000

thermometer design: wireless ▪ clock: yes, quartz ▪ date ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ the possibility of hanging on the wall ▪ power of station: 1× 3 V CR2032 (included) ▪ main unit size: 83 × 17 × 88 mm ▪ screen size: 73 × 73 mm





°C IN | % IN | 1× 3 V CR2032 included

8 592920 136140

E0522 1/5/-/60

26 03 204 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermometer design: wireless ▪ magnet for fixing ▪ clock: yes, quartz ▪ date ▪ alarm clock ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 10 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ the possibility of hanging on the wall ▪ power of station: 1× 3 V CR2032 (included) ▪ main unit size: 93 × 15 × 73 mm ▪ screen size: 61 × 82 mm





°C IN | % IN | Indoor | 1× 3 V CR2032 included | Magnetic

8 592920 136157

E6210 1/-/-/56

26 03 205 000

---

thermometer design: wire ▪ clock ▪ alarm clock ▪ snooze ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 25 % to 95 % RH, resolution 1 % ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ min. and max. temperature ▪ wired probe for sensor: 2,9 m, Ø 4 mm ▪ the possibility of hanging on the wall ▪ power of station: 1× 1.5 V AAA (not included) ▪ main unit size: 23 × 76 × 107 mm ▪ screen size: 46 × 61 mm





Max/Min | °C IN/OUT | % IN | 1× AAA

8 592920 113400

E0121 1/-/-/20

26 03 016 001

---

thermometer design: wireless ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 66 × 25 × 100 mm ▪ screen size: 53 × 82 mm





Max/Min | °C IN | % IN | 2× AAA

8 592920 150443

E0558 1/-/-/20

26 03 206 000

NEW

---

thermometer design: wireless ▪ clock: yes, quartz ▪ date ▪ alarm clock ▪ snooze ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ min. and max. temperature ▪ range in open space: up to 100 m ▪ possible additional sensor: 3 (E00387) ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1,5 V AA (not included) ▪ main unit size: 66 × 25 × 100 mm ▪ sensor size: 21 × 38 × 100 mm ▪ screen size: 53 × 82 mm





Max/Min | °C IN/OUT | % IN/OUT | 2× AAA | 2× AA

8 592920 150467

E0558W 1/-/-/20

26 03 208 000

NEW

---

thermometer design: wireless ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor temperature: -30 °C to +50 °C, resolutions 0,1 °C ▪ min. and max. temperature ▪ range in open space: up to 80 m ▪ possible additional sensor: 1 (E05018) ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 91,8 × 20 × 91,8 mm ▪ sensor size: 31 × 19 × 100 mm ▪ screen size: Ø 64 mm





°C IN/OUT | 2× AAA | 2× AAA

8 592920 080733

E0129 1/-/-/20

26 03 119 002

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermometer design: wireless ▪ indoor temperature: 0 °C to +60 °C, resolution 0.1 °C ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ range in open space: up to 100 m ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 18 × 56 × 85 mm ▪ sensor size: 20 × 49 × 68 mm ▪ screen size: 34 × 39 mm





°C IN/OUT | 2× AAA | 2× AAA

8 592920 010761

E0042
26 03 118 000

1/-/-/30

---

thermometer design: wireless ▪ clock: yes, quartz ▪ LED backlight display ▪ alarm clock ▪ snooze ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ outdoor temperature: -30 °C to +60 °C, resolutions 0.1 °C ▪ min. and max. temperature ▪ range in open space: up to 50 m ▪ possible additional sensor: 3 (E05018) ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 21 × 80 × 110 mm ▪ sensor size: 25 × 50 × 95 mm ▪ screen size: 53 × 81 mm





Max/Min | °C IN/OUT | 2× AAA | 2× AAA

8 592920 113394

E8636
26 03 119 003

1/-/-/32

---

thermometer design: wire ▪ clock: yes, quartz ▪ alarm clock ▪ snooze ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ min. and max. temperature ▪ wired probe for sensor: 1,9 m, Ø 14 mm ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 66 × 25 × 100 mm ▪ screen size: 53 × 82 mm





Max/Min | °C IN/OUT | % IN | 2× AAA

8 592920 150450

E0558P
26 03 207 000

1/-/-/20

NEW

---

thermometer design: wire ▪ indoor temperature: 0 °C to +60 °C, resolution 0.1 °C ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ wired probe for sensor: 2 m, Ø 8 mm ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 18 × 57 × 85 mm ▪ screen size: 34 × 40 mm





°C IN/OUT | 2× AAA

8 592920 010754

E0041
26 03 013 000

1/-/-/30

---

thermometer design: wire ▪ indoor temperature: 0 °C to +60 °C, resolution 0.1 °C ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ min. and max. temperature ▪ wired probe for sensor: 0.9 m ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 19 × 58 × 75 mm ▪ screen size: 41 × 52 mm





Max/Min | °C IN/OUT | 2× AAA

8 592920 113516

E0422
26 03 016 002

1/-/-/30

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

designed for the type of main unit: E8610, E8614, E8620, E8625, E8636, E8647N, E8647W ▪ range in open space: up to 100 m ▪ operating temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AA (not included) ▪ dimensions: 95 × 95 × 156 mm ▪ packaging: 1 pc, small box





°C | 2× AA

8 592920 159316

E00032
26 03 209 000

1/-/-/20
NEW

Spare sensors

- wireless sensors for EMOS weather stations
- measure outdoor temperature and humidity
- range of up to 25–100 m in an open area

designed for the type of main unit: AOK-5018B, AOK-5060, S627BS, IB303TR, E0107T, IW001-DCF, IW003-DCF, E5068, E5062, E5063, E3078, E3028, E0300, E8236, E0211, E3010, E0127, E0329 ▪ designed for another type of main unit: E5005, E3003, E0107, E0129, E5101, E5010, E0352, E5111, E8625, E8636, E0316, E5080, E8614, E8610, E8647, E8647N, E8647W ▪ indicator of outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ range in open space: up to 25 m ▪ external wire sensor ▪ operating temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AAA (not included) ▪ dimensions: 21 × 60 × 100 mm ▪ packaging: 1 pc, small box





°C IN/OUT | % IN/OUT | 25 m | 433.92 MHz | 2× AAA

8 595025 392770

E05018
26 93 000 120

1/-/-/100

designed for the type of main unit: E3070 ▪ range in open space: up to 30 m ▪ operating temperature: -30 °C to +60 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AAA (not included) ▪ dimensions: 84 × 64 × 25 mm ▪ packaging: 1 pc, small box





°C OUT | 30 m | 433.92 MHz | 2× AAA

8 592920 018170

E03070
26 93 000 180

1/-/-/100

designed for the type of main unit: E6018, E6016 ▪ indicator of outdoor humidity: 1 % to 99 % RH, resolution 1 % ▪ range in open space: up to 100 m ▪ operating temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AAA (not included) ▪ dimensions: 15 × 62 × 100 mm ▪ packaging: 1 pc, small box





°C OUT | % OUT | 100 m | 433.92 MHz | 2× AAA

8 592920 081402

E06018
26 93 000 220

1/-/-/100

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

designed for the type of main unit: E6016 ▪ indicator of outdoor humidity: 1 % to 99 % RH, resolution 1 % ▪ range in open space: up to 100 m ▪ operating temperature: -30 °C to +60 °C, resolution 0.1 °C ▪ power source: 4× 1.5 V AA (not included) ▪ dimensions: 275 × 135 × 310 mm ▪ packaging: 1 pc, small box





°C OUT | % OUT | 100 m | 433.92 MHz | 4× AA 1.5 V

8 592920 090381

E06016
26 93 000 230

1/-/-/1

---

designed for the type of main unit: E0387, E8614, E0352, E0316, E0107, E0558W, E8610 ▪ indicator of outdoor humidity: 1 % to 99 % RH, resolution 1 % ▪ range in open space: up to 80 m ▪ operating temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AA (not included) ▪ dimensions: 20 × 38 × 100 mm ▪ packaging: 1 pc, small box





°C OUT | % OUT | 80 m | 433.92 MHz | 2× AA

8 592920 122259

E00387
26 93 000 240

1/-/-/100

---

designed for the type of main unit: E6000 ▪ indicator of outdoor humidity: 1 % to 99 % RH, resolution 1 % ▪ range in open space: up to 100 m ▪ operating temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AA (not included) ▪ dimensions: 50 × 33 × 96 mm ▪ packaging: 1 pc, small box





°C OUT | % OUT | 100 m | 868 MHz | 2× AA

8 592920 150504

E06000
26 93 000 250

1/-/-/50

NEW

Scales

Personal scales GoSmart

EMOS GoSmart

- wide range of measurement indicators
- clear graphical reports
- memory for multiple users
- elegant design
- weighing accuracy of 100 g, max load 180 kg
- connection to home network via Bluetooth protocol
- compatibility with EMOS GoSmart products and TUYA devices

Powered by tuya

App Store

Google Play

- backlight display
- scale surface: ITO tempered glass
- maximum load: 180 kg
- Bluetooth
- BMI – measurement of fat, water and muscle
- weight units: kg, lb
- memory: 10 persons max.
- power source: 3× 1.5 V AAA (included)
- dimensions: 26 × 300 × 300 mm

- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Bluetooth 5.0
- transmission frequency: 2.4 GHz
- notifications to the mobile app





BLE | BMI Index | 18 Body values | % Body fat rate | Muscle mass | Weight reports | 180 kg max. | 3× 1.5 V AAA included

8 592920 122129

EV112 1/-/-/3

26 17 010 902

Personal scales

- modern design enhances the bathroom and helps you stay fit
- support effective weight management by measuring body fat, water, and muscle mass
- memory for up to 10 people on selected models
- powered by AAA or CR2032 batteries
- durable tempered glass with a load capacity of up to 180 kg

- backlight display
- scale surface: tempered glass
- maximum load: 180 kg
- weight units: kg, lb, St
- power source: 2× 1.5 V AAA (included)
- dimensions: 25 × 280 × 280 mm





Tempered glass | Automatic ON/OFF | 2× 1.5 V AAA included | MAX. 180 kg

8 592920 026861

EV106 1/-/-/5

26 17 010 600

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- scale surface: tempered glass
- maximum load: 180 kg
- weight units: kg, lb, St
- power source: 1× 3 V CR2032 (included)
- dimensions: 20 × 300 × 300 mm













8 592920 006962

EV105
26 17 010 500

1/-/-/6

- backlight display
- scale surface: tempered glass
- maximum load: 150 kg
- BMI – measurement of fat, water and muscle
- weight units: kg, lb, St
- memory: 10 persons max.
- power source: 2× 1.5 V AAA (included)
- dimensions: 20 × 330 × 320 mm















8 592920 000250

EV104
26 17 010 400

1/-/-/6

Kitchen, hanging scales

- digital kitchen scales with capacity of 5–15 kg
- unit switching between g, kg, ml, lb and oz
- powered by AAA or CR2032 batteries
- surface made of ABS plastic, tempered glass or stainless steel
- with tare and overload function
- digital hanging scale with a capacity of 50 kg (for fish and luggage)

- scale surface: tempered glass
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg
- power source: 1× 3 V CR2032 (included)
- dimensions: 15 × 152 × 219 mm













8 592920 006900

EV014
26 17 001 400

1/-/-/20

- scale surface: tempered glass
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg
- power source: 1× 3 V CR2032 (included)
- dimensions: 15 × 152 × 219 mm













8 592920 006917

EV014B
26 17 001 401

1/-/-/20

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- backlight display
- scale surface: ABS plastic
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg, ml
- power source: 2× 1.5 V AAA (not included)
- dimensions: 20 × 198 × 223 mm





Tare function | Accuracy 1 g | 2× AAA | 1.4 l | MAX. 5 kg

8 592920 067109

EV025 1/-/-/6

26 17 002 500

- backlight display
- scale surface: ABS plastic
- tare function
- maximum load: 5 kg
- weight units: g, kg, lb, oz
- power source: 2× 1.5 V AAA (not included)
- dimensions: 49 × 150 × 218 mm





Tare function | Accuracy 1 g | 2× AAA | 1.25 l | MAX. 5 kg

8 592920 009499

EV016 1/-/-/6

26 17 001 600

- backlight display
- scale surface: stainless steel
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg
- power source: 2× 3 V CR2032 (included)
- dimensions: 15 × 163 × 221 mm





Tare function | Accuracy 1 g | 2× CR2032 | MAX. 5 kg

8 595025 393982

EV012 1/-/-/12

26 17 001 200

- backlight display
- scale surface: stainless steel
- tare function
- maximum load: 15 kg
- weight units: g, kg, lb, oz
- power source: 2× 1.5 V AAA (not included)
- dimensions: 15 × 176 × 216 mm





Tare function | Accuracy 1 g | 2× AAA | 15 kg

8 592920 052693

EV023 1/-/-/20

26 17 002 300

- backlight display
- scale surface: stainless steel
- tare function
- maximum load: 10 kg
- weight units: g, kg, ml, oz, lb, tl
- power source: 2× 1.5 V AAA (included)
- dimensions: 15 × 153 × 212 mm





Tare function | Accuracy 1 g | 2× 1.5 V AAA included | 10 kg

8 592920 103340

EV026 1/-/-/20

26 17 000 500

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- scale surface: ABS plastic + aluminium (Al)
- tare function
- maximum load: 50 kg
- weight units: kg, lb
- power source: 1× 3 V CR2032 (included)
- dimensions: 31 × 40 × 148 mm





Tare function | Accuracy 1 g | 1× 3 V CR2032 included | 50 kg max. | Portable

8 595025 394026

EV020 1/-/-/40

26 17 002 000

- backlight display
- scale surface: ABS plastic + stainless steel
- tare function
- maximum load: 3 kg
- weight units: g, lb, oz
- power source: 3× 1.5 V AAA (included)
- dimensions: 154 × 28 × 190 mm





Tare function | Accuracy 0.1 g | 3× 1.5 V AAA included | 3 kg max. | Coffee preparation | Timer

8 592920 123232

EV029 1/-/-/10

26 17 002 600

Kitchen timers

- serves as a timer and stopwatch
- an acoustic signal alerts when the set time limit ends
- features a magnet for attachment to a refrigerator or an adjustable stand
- powered by a micro AAA battery or a button cell battery

- thermometer design: wire
- stopwatch
- magnet for fixing
- countdown of time max. from: 99 min. 59 sec.
- outdoor temperature: -20 °C to +250 °C, res. 1 °C
- temperature warning
- wired probe for sensor: 1.4 m
- the possibility of hanging on the wall
- power of station: 1× 1.5 V AAA (not included)

- main unit size: 18 × 65 × 70 mm
- screen size: 47 × 21 mm





Timer | 1× AAA | Magnetic

8 592920 038307

E2157 1/-/10/40

26 03 015 000

- countdown of time max. from: 99 min. 59 sec.
- stopwatch
- memory of the last value
- magnet for fixing
- power source: 1× 1.5 V LR1130 (included)
- dimensions: 7 × 55 × 70 mm
- packaging: 1 pc, blister





Stopwatch | 1× 1.5 V LR1130 included | Magnetic

8 595025 388087

E0202 1/-/10/100

26 05 004 000

Air quality monitor

Air quality monitor GoSmart

EMOS GoSmart

- overview of CO2 level in the monitored room
- display of indoor temperature, humidity and time
- LED display with permanent backlight
- use colour indicators to visualise air quality
- built-in alarm for increased CO2 concentration
- connection to home network via WiFi protocol
- compatibility with EMOS GoSmart products and TUYA devices

Powered by tuya

App Store | Google Play

- option to set the temperature unit: °C/°F
- CO2 alert
- setting CO2 alert limits
- CO2 level indicator
- CO2 measurement range: 400 to 5 000 PPM
- indoor temperature: 0 °C to +50 °C, resolution 0.1°C
- indoor humidity: 20 % to 90 % RH, resolution 1 %
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- notifications to the mobile app





Wi Fi | CO_2 detection | CO_2 alert | °C IN | % IN | Clock & alarm clock | Comfort view | Data storage | Backlit display | 5 V/1 A USB C port

8 592920 126318

Order Code	Packaging
E30300	1/-/-/12
26 27 303 000	

Pet Care

Pet Care GoSmart

EMOS GoSmart

- pet care control via mobile application
- powered by adapter or batteries
- smart feeders with anti-jam protection
- quiet-operation fountains with filtration
- connection to the home network via WiFi protocol
- compatible with EMOS GoSmart products and TUYA devices

Powered by tuya

App Store | Google Play

- product type: smart feeder with camera
- capacity: 6 l
- dimensions: 190 × 210 × 325 mm
- power source: 5 V/1 A / 4× 1,5 V type AA
- recommendations: medium and large breeds
- one serving: 5 g
- average kibble size: 2–15 mm
- camera resolution: 1 920 × 1 080
- night vision: yes, max. 5 m
- source included in packaging
- packaging: 1 pc, box
- IR CUT
- other function: removable stainless steel bowl, adju
- voice communication: yes, bidirectional (Full-Duplex
- notifications to the mobile app
- WebRTC function
- supported OS: Android, iOS
- protocol: Wi-Fi





Wi Fi | Max. 12× | Stuck food alarm | Motion detection | Voice recording | Low battery warning | Schedule | Dual power | Food level sensor | Stainless steel bowl

8 592920 138724

H6006 1/-/-/2

26 31 600 600

- product type: smart feeder with camera
- capacity: 4 l
- dimensions: 315 × 314 × 168 mm
- power source: 5 V/1 A / 3× 1,5 V type D
- recommendations: small and medium breeds
- one serving: 5 g
- average kibble size: 2–15 mm
- camera resolution: 1 920 × 1 080
- night vision: yes, max. 5 m
- source included in packaging
- packaging: 1 pc, box
- IR CUT
- other function: removable stainless steel bowl, adju
- voice communication: yes, bidirectional (Full-Duplex
- notifications to the mobile app
- WebRTC function
- supported OS: Android, iOS
- protocol: Wi-Fi





Wi Fi | Max. 12× | Stuck food alarm | Motion detection | Voice recording | Low battery warning | Schedule | Dual power | Food level sensor | Stainless steel bowl

8 592920 138700

H6004 1/-/-/2

26 31 600 400

- product type: smart feeder
- capacity: 4 l
- dimensions: 315 × 314 × 168 mm
- power source: 5 V/1 A / 3× 1,5 V type D
- recommendations: small and medium breeds
- one serving: 5 g
- average kibble size: 2–15 mm
- source included in packaging
- packaging: 1 pc, box
- other function: removable stainless steel bowl
- notifications to the mobile app
- supported OS: Android, iOS
- protocol: Wi-Fi





Wi Fi | Max. 10× | Stuck food alarm | Voice recording | Low battery warning | Schedule | Dual power | Food level sensor | Stainless steel bowl

8 592920 138687

H6002 1/-/-/2

26 31 600 200

EMOS
A brand of Legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product type: smart water fountain
- capacity: 2,6 l
- dimensions: 259 × 143 × 170 mm
- power source: 5 V/1 A
- recommendations: small and medium breeds
- source included in packaging
- packaging: 1 pc, box
- other function: water filtration, filter replacement n
- notifications to the mobile app
- supported OS: Android, iOS
- protocol: Wi-Fi





Wi Fi | Purifying system | 360° stream | Silent operation | USB 5 V | Filter alarm | Water alarm

8 592920 138762

H6102 1/-/-/2

26 31 610 200

- compatible models: H6102
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz
- input voltage/frequency: DC 5V
- flow rate: 0.8-2.5 l/min
- noise: <35 dB
- waterproof level: IPX8
- operating temperature: 3-40°C
- mounting method: suction cups
- filter: 36 × 29 × 8.5 mm 40 PPI
- dimensions: 43 × 37 × 29 mm
- water outlet diameter: 8.5 mm





Wi Fi

8 592920 141335

H6903 1/-/-/20

26 31 690 300

- compatible models: H6101, H6102
- filter composition: textile, with activated carbon, io
- lifespan: 2–4 weeks
- package contents: 1× brush, 4× filter, 4× pump filte
- diameter: 135 mm





4 PACK | EVERY 2-4 WEEKS

8 592920 138786

H6901 1/-/-/20

26 31 690 100

Pet Care

- powered by adapter or batteries
- feeders with anti-jam protection
- quiet-operation fountains with filtration

- product type: smart feeder
- capacity: 4 l
- dimensions: 315 × 314 × 168 mm
- power source: 5 V/1 A / 3× 1,5 V type D
- recommendations: small and medium breeds
- one serving: 5 g
- average kibble size: 2–15 mm
- source included in packaging
- packaging: 1 pc, box
- other function: removable stainless steel bowl





Max. 6× | Schedule | Dual power | Stainless steel bowl

8 592920 138663

H6001 1/-/-/2

26 31 600 100

www.emos.eu

Order Code
Item Number

Packaging
Type

- product type: water fountain
- capacity: 2,6 l
- dimensions: 259 × 143 × 170 mm
- power source: 5 V/1 A
- recommendations: small and medium breeds
- source included in packaging
- packaging: 1 pc, box
- other function: water filtration







8 592920 138748

H6101 1/-/-/2

26 31 610 100

- compatible models: H6101
- input voltage/frequency: DC 5V
- flow rate: 2 l/min
- noise: <35 dB
- waterproof level: IPX8
- operating temperature: 3-40°C
- mounting method: suction cups
- filter: 36 × 29 × 8.5 mm 40 PPI
- dimensions: 43 × 37 × 29 mm
- water outlet diameter: 8.5 mm





8 592920 141311

H6902 1/-/-/20

26 31 690 200

- compatible models: H6101, H6102
- filter composition: textile, with activated carbon, io
- lifespan: 2–4 weeks
- package contents: 1× brush, 4× filter, 4× pump filte
- diameter: 135 mm







8 592920 138786

H6901 1/-/-/20

26 31 690 100

TV and audio accessories

Multimedia players, radios

- support for DAB, DAB+ and FM broadcasting
- crystal-clear sound
- long operating time with replaceable batteries
- can also be powered via USB cable
- option to save favorite stations
- can be used as a wireless Bluetooth speaker

bluetooth for connecting e.g. phone, tablet ▪ tuner frequency: 87.5–108 Mhz/174.9–239.2 Mhz ▪ headphone output ▪ power supply: 4× AA 1.5 V (battery) ▪ antenna: telescopic antenna ▪ speaker: 50 mm/4 Ohm/3 W ▪ dimensions: 190 × 91 × 45 mm ▪ packaging: 1 pc, box





8 592920 141038

E0091 1/-/-/6

26 18 002 800

bluetooth for connecting e.g. phone, tablet ▪ tuner frequency: 87.5–108 Mhz/174.9–239.2 Mhz ▪ headphone output ▪ power supply: 4× AA 1.5 V (battery) ▪ antenna: telescopic antenna ▪ speaker: 50 mm/4 Ohm/3 W ▪ dimensions: 190 × 91 × 45 mm ▪ packaging: 1 pc, box





8 592920 141021

E0090 1/-/-/6

26 18 002 700

tuner frequency: FM 88–108 MHz ▪ USB input ▪ slot for microSD card ▪ MP3 support ▪ headphone output ▪ power supply: 5 V/USB-C (not included) ▪ antenna: telescopic antenna ▪ speaker: 50 mm/4 Ohm/3 W ▪ dimensions: 125 × 30 × 70 mm ▪ packaging: 1 pc, box





8 592920 076576

E0086 1/-/-/32

26 18 002 600

TV wall mounts

- suitable for a wide range of TV sizes
- compatibility with VESA standards
- high load capacity and sturdy construction
- installation hardware included
- suitable for home and professional use

- holder type: fix
- screen diagonal: 26–60" (65–152 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 400 × 400 mm
- distance from a wall: 23 mm
- max. load capacity (kg): 50
- dimensions: 450 × 430 × 23 mm
- packaging: 1 pc, paper box







8 592920 153215

KT01F 1/-/-/10

32 32 101 000 NEW

- holder type: fix
- screen diagonal: 42–100" (107–254 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 700 × 600 mm
- distance from a wall: 33 mm
- max. load capacity (kg): 100
- dimensions: 770 × 600 × 33 mm
- packaging: 1 pc, paper box







8 592920 153239

KT02F 1/-/-/2

32 32 102 000 NEW

- holder type: fix
- screen diagonal: 50–120" (127–305 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 900 × 600 mm
- distance from a wall: 38 mm
- max. load capacity (kg): 120
- dimensions: 995 × 625 × 38 mm
- packaging: 1 pc, paper box







8 592920 153253

KT03F 1/-/-/2

32 32 103 000 NEW

- holder type: tilting
- screen diagonal: 26–65" (65–165 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 400 × 400 mm
- tilt: +/-10°
- distance from a wall: 47,5 mm
- max. load capacity (kg): 60
- dimensions: 440 × 430 × 47,5 mm
- packaging: 1 pc, paper box







8 592920 153277

KT01T 1/-/-/5

32 32 201 000 NEW

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- holder type: tilting
- screen diagonal: 32–75" (81–191 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 600 × 400 mm
- tilt: +/-10°
- distance from a wall: 47,5 mm
- max. load capacity (kg): 75
- dimensions: 640 × 430 × 47,5 mm
- packaging: 1 pc, paper box





8 592920 153291

KT02T | 1/-/-/5

32 32 202 000 | NEW

- holder type: tilting
- screen diagonal: 42–85" (107–216 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 700 × 500 mm
- tilt: +/-12°
- distance from a wall: 70 mm
- max. load capacity (kg): 100
- dimensions: 770 × 530 × 70 mm
- packaging: 1 pc, paper box





8 592920 153314

KT03T | 1/-/-/3

32 32 203 000 | NEW

- holder type: console
- screen diagonal: 26–60" (65–152 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 400 × 400 mm
- tilt: +/-8°
- positioning: +/- 90°
- distance from a wall: 55-390 mm
- max. load capacity (kg): 30
- dimensions: 420 × 420 × 390 mm
- packaging: 1 pc, paper box





8 592920 153338

KT01C | 1/-/-/5

32 32 301 000 | NEW

- holder type: console
- screen diagonal: 42–85" (107–216 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 600 × 400 mm
- tilt: +/-10°
- positioning: +/- 90°
- distance from a wall: 80-400 mm
- max. load capacity (kg): 45
- dimensions: 640 × 430 × 400 mm
- packaging: 1 pc, paper box





8 592920 153352

KT02C | 1/-/-/2

32 32 302 000 | NEW

- holder type: console
- screen diagonal: 32–98" (81–249 cm)
- min. VESA mounting dimensions: 75 × 75 mm
- max. VESA mounting dimensions: 600 × 400 mm
- tilt: +/-5°
- positioning: +/- 90°
- distance from a wall: 80-650 mm
- max. load capacity (kg): 80
- dimensions: 680 × 420 × 650 mm
- packaging: 1 pc, paper box





8 592920 153376

KT03C | 1/-/-/1

32 32 303 000 | NEW

Universal remote controllers OFA

- wide range of fully functional universal remote controls
- 100 % guaranteed compatibility with your devices
- controller pairs with most devices due to vast code database
- quality material manufacturing
- service support: +420 581 261 101/e-mail: oneforall@emos.cz

---

possible number of controlled devices: 2 ▪ designed for: TV TCL and audio device ▪ code search: readjustment of the code for a particular TCL line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 15 × 37 × 228 mm ▪ weight: 195 g ▪ packaging: 1 pc, small paper box





8 716184 077715

KE4922

32 33 049 220

1/-/3/24

---

possible number of controlled devices: 1 ▪ designed for: TV Hisense ▪ code search: readjustment of the code for a particular HISENSE line ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: special TV ▪ dimensions: 19 × 45 × 230 mm ▪ weight: 80 g ▪ packaging: 1 pc, small paper box





8 716184 079641

KE4916

32 33 049 160

1/-/3/24

---

possible number of controlled devices: 2 ▪ designed for: Panasonic TV and audio device ▪ code search: readjustment of the code for a particular PANASONIC line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 28 × 47 × 224 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box





8 716184 072758

KE4914

32 33 049 140

1/-/3/24

---

possible number of controlled devices: 2 ▪ designed for: Philips TV and audio device ▪ code search: readjustment of the code for a particular Philips line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 22 × 47 × 207 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box





8 716184 072727

KE4913

32 33 049 130

1/-/3/24

possible number of controlled devices: 2 ▪ designed for: Sony TV and audio device ▪ code search: readjustment of the code for a particular SONY line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 28 × 47 × 224 mm ▪ weight: 88 g ▪ packaging: 1 pc, small paper box




8 716184 072697

KE4912
32 33 049 120
1/-/3/24

---

possible number of controlled devices: 2 ▪ designed for: TV LG and audio device ▪ code search: readjustment of the code for a particular LG line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 25 × 44 × 195 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box




8 716184 072666

KE4911
32 33 049 110
1/-/3/24

---

possible number of controlled devices: 2 ▪ designed for: Samsung TV and audio device ▪ code search: readjustment of the code for a particular SAMSUNG line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 23 × 44 × 195 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box




8 716184 072635

KE4910
32 33 049 100
1/-/3/24

---

possible number of controlled devices: 8 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, DVD, Blu-ray, Video, Amplifier, Tuner, Home cinema, CD, iPod Dock ▪ code search: manual ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: Basic ▪ dimensions: 24 × 50 × 182 mm ▪ weight: 80 g ▪ packaging: 1 pc, small paper box




8 716184 045080

KE2981
32 33 029 810
1/-/6/48

---

possible number of controlled devices: 8 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, Amplifier, Tuner, Home cinema, Sound Bar ▪ code search: manual ▪ simple set settings ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: Essence ▪ dimensions: 20 × 46 × 223 mm ▪ weight: 119 g ▪ packaging: 1 pc, small paper box




8 716184 076312

KE1282
32 33 012 820
1/-/6/48

	Order Code Item Number	Packaging Type

possible number of controlled devices: 4 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, DVD, Blu-ray, Amplifier, Tuner, Home Cinema, CD, iPod Dock ▪ code search: manual ▪ simple set settings ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: Essence ▪ dimensions: 20 × 46 × 223 mm ▪ weight: 119 g ▪ packaging: 1 pc, small paper box





8 716184 076282

KE1242

32 33 012 420

1/-/6/48

---

possible number of controlled devices: 1 ▪ designed for: TV ▪ code search: manual ▪ simple set settings ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AA ▪ model line: Essence ▪ dimensions: 15 × 44 × 225 mm ▪ weight: 107 g ▪ packaging: 1 pc, small paper box





8 716184 076251

KE1212

32 33 012 120

1/-/6/48

---

possible number of controlled devices: 2 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV ▪ code search: manual ▪ simple set settings ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: Big Button ▪ dimensions: 40 × 17 × 150 mm ▪ weight: 220 g ▪ packaging: 1 pc, small paper box





8 716184 078323

KE6821

32 33 068 300

1/-/3/24

Power supply extension cords, cable reels, plugs, accessories



Power supply extension cords and sockets

FRENCH Power supply extension cords and sockets

Extension cords

1-phase 16A with rubber insulation

- neoprene extension lead – resistant to water (IP44) and extreme temperature
- conductor cross-section: 1.5 mm², max. load 3 680 W
- round sockets, child safety shutters, available in various lengths
- illuminated switch with rubber cover
- mounting holes on the power strip body for screwing e.g. to a wall

P14131 1/-/-/10

19 02 340 301

8 592920 055472





- length: 3 m
- number of sockets: 4
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H07RN-F3G
- type of insulation: rubber/neopren
- children protection
- packaging: 1 pc, foil

P14151 1/-/-/6

19 02 340 501

8 592920 076538





- length: 5 m
- number of sockets: 4
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H07RN-F3G
- type of insulation: rubber/neopren
- children protection
- packaging: 1 pc, foil

P14101 1/-/-/6

19 02 341 000

8 592920 076545





- length: 10 m
- number of sockets: 4
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H07RN-F3G
- type of insulation: rubber/neopren
- children protection
- packaging: 1 pc, foil

1-phase 16A with PVC insulation

- PVC-insulated extension leads are ideal for the home
- wire cross-section: 1.5 m², round sockets, with/without switch
- different lengths, max. load 3 680 W, child socket covers
- in white, black and dark green - they blend in with the interior

P1212 1/5/-/20

19 02 120 201

8 592920 140390



length: 2 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G 1.0 mm² ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1311 1/5/-/20

19 02 130 121

8 592920 006559



length: 1.2 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P13115 1/5/-/20

19 02 130 155

8 592920 030929



length: 1.5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1312 1/5/-/20

19 02 130 200

8 595025 301444



length: 2 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1312FC 1/-/5/10

19 02 130 207

8 592920 144930



length: 2 m ▪ number of sockets: 3× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 1× USB-A, 1× USB-C, total: 3,1 A – 15,5 W (fast charging) ▪ packaging: 1 ks, box

P1312CU 1/5/-/10

19 02 130 206

8 592920 132845



length: 2 m ▪ number of sockets: 3× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 1× USB-A, 1× USB-C, total: 3,4 A – 17 W ▪ packaging: 1 pc, hanging

P1313R 1/5/-/20

19 02 130 308

8 592920 016442



length: 3 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1315R 1/-/-/10

19 02 130 508

8 592920 016459



length: 5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P1317R 1/-/-/10

19 02 130 701

8 592920 111871





length: 7 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1310R 1/-/-/6

19 02 131 008

8 592920 016466



length: 10 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1412 1/5/-/20

19 02 140 200

8 595025 301499





length: 2 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1413R 1/5/-/20

19 02 140 301

8 592920 111895



length: 3 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1415R 1/5/-/15

19 02 140 502

8 592920 111925





length: 5 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1417R 1/-/-/10

19 02 140 701

8 592920 111956



length: 7 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1410R 1/-/-/8

19 02 141 001

8 592920 111970





length: 10 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1512 1/5/-/15

19 02 150 200

8 595025 301543



length: 2 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1513R 1/-/-/10

19 02 150 308

8 592920 016503





length: 3 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1513CU 1/5/-/10

19 02 150 305

8 592920 132883



length: 3 m ▪ number of sockets: 5× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 1× USB-A, 1× USB-C, total: 3,4 A – 17 W ▪ packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P1513FC 1/-/5/10

19 02 150 309



8 592920 144992 | 3 m | 5×

length: 3 m ▪ number of sockets: 5× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 1× USB-A, 1× USB-C, total: 3,1 A – 15,5 W (fast charging) ▪ packaging: 1 ks, box

P1515R 1/-/-/10

19 02 150 508



8 592920 016510 | 5 m | 5×

length: 5 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1517R 1/-/-/10

19 02 150 701



8 592920 111994 | 7 m | 5×

length: 7 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1510R 1/-/-/6

19 02 151 008



8 592920 016527 | 10 m | 5×

length: 10 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1612 1/-/-/10

19 02 160 200



8 595025 309617 | 2 m | 6×

length: 2 m ▪ number of sockets: 6 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1613R 1/-/-/10

19 02 160 303



8 592920 112014 | 3 m | 6×

length: 3 m ▪ number of sockets: 6 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1615R 1/-/-/10

19 02 160 502



8 592920 112038 | 5 m | 6×

length: 5 m ▪ number of sockets: 6 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0311 1/5/-/20

19 02 230 160



8 592920 008263 | 1.5 m | 3×

length: 1.5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0312 1/5/-/20

19 02 230 200



8 592920 116449 | 2 m | 3×

length: 2 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0313R 1/5/-/20

19 02 230 301



8 592920 112052 | 3 m | 3×

length: 3 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P1313RZ 1/5/-/20

19 02 830 300

8 592920 112915



length: 3 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0315R 1/5/-/15

19 02 230 501

8 592920 112083



length: 5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0413R 1/5/-/20

19 02 240 301

8 592920 112113



length: 3 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0415R 1/5/-/15

19 02 240 501

8 592920 112144



length: 5 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0512 1/5/-/20

19 02 250 200

8 592920 116500



length: 2 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P1312Z 1/5/-/20

19 02 130 203

8 592920 116562



length: 2 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC0513R 1/5/-/10

19 02 250 301

8 592920 112175



length: 3 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC1311 1/5/-/20

19 02 330 150

8 595025 365477



length: 1.5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC1312 1/5/-/20

19 02 330 200

8 592920 116470



length: 2 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC1313R 1/5/-/20

19 02 330 301

8 592920 112205



length: 3 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P1311PD 1/-/-/10

19 02 330 153







length: 1.5 m ▪ number of sockets: 3× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F ▪ type of insulation: PVC ▪ children protection ▪ USB output: 2× USB-A QC 3.0 18 W, 1× USB-C PD 20 W, total: 3.4 A/17 W max. ▪ packaging: 1 ks, box

PC1315R 1/5/-/15

19 02 330 501







length: 5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC1413R 1/5/-/20

19 02 340 302







length: 3 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC1415R 1/5/-/15

19 02 340 502







length: 5 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

PC1512 1/5/-/15

19 02 350 200







length: 2 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0212CQ 1/-/5/10

19 02 120 200







length: 2 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 2× USB-A 2,4 A, 1× USB-C 3 A, total: 3 A-15 W+Wireless charging 10 W, total: 25 W max ▪ packaging: 1 ks, box

PC1513R 1/5/-/15

19 02 350 301







length: 3 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P02114 1/5/-/20

19 02 020 141







length: 1.4 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G 1.0 mm² ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0211E 1/-/12/24

19 02 020 142







length: 1.4 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G 1.5 mm² ▪ type of insulation: PVC ▪ children protection ▪ USB output: 2× USB typ A + 1× USB typ C ; 5 V DC; total ∑ 3,4 A (17 W) max. ▪ packaging: 1 pc, hanging

P0212U 1/5/-/20

19 02 020 200







length: 2 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 2× USB typ A + 1× USB typ C ; 5 V DC; total ∑ 3,4 A (17 W) max. ▪ packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P0212 1/5/-/20

19 02 020 201







length: 2 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G 1.0 mm² ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0311 1/5/-/20

19 02 030 150







length: 1.5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0312 1/5/-/20

19 02 030 200







length: 2 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0313R 1/5/-/15

19 02 030 308







length: 3 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0315R 1/5/-/15

19 02 030 508







length: 5 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0317R 1/-/-/12

19 02 030 701







length: 7 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0310R 1/-/-/8

19 02 031 008







length: 10 m ▪ number of sockets: 3 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0411 1/5/-/20

19 02 040 150







length: 1.5 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P04119U 1/-/3/12

19 02 040 190







length: 1.9 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 2× USB ⍁ 2,1 A max. (10.5 W) ▪ packaging: 1 ks, box

P0412 1/5/-/20

19 02 040 200







length: 2 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

EMOS A brand of legrand


www.emos.eu

Order Code Item Number | Packaging Type

P0413R 1/5/-/20

19 02 040 303

8 592920 111680





length: 3 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0415R 1/5/-/15

19 02 040 505

8 592920 111710






length: 5 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0417R 1/-/-/10

19 02 040 701

8 592920 111741





length: 7 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0410R 1/5/-/10

19 02 041 002

8 592920 111765





length: 10 m ▪ number of sockets: 4 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0511 1/5/-/15

19 02 050 150

8 595025 309457





length: 1.5 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0512 1/5/-/20

19 02 050 200

8 595025 301246





length: 2 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0513R 1/-/-/15

19 02 050 308

8 592920 016473





length: 3 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0515R 1/-/-/10

19 02 050 508

8 592920 016480





length: 5 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0517R 1/5/-/10

19 02 050 701

8 592920 111796





length: 7 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0510R 1/-/-/6

19 02 051 008

8 592920 016497





length: 10 m ▪ number of sockets: 5 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0612 1/5/-/15

19 02 060 200

8 595025 309556



length: 2 m ▪ number of sockets: 6 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0613R 1/5/-/10

19 02 060 301

8 592920 111826



length: 3 m ▪ number of sockets: 6 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P0615R 1/-/-/10

19 02 060 501

8 592920 111857



length: 5 m ▪ number of sockets: 6 ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

P12114 1/5/-/20

19 02 120 140

8 592920 140369



length: 1.4 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.0 mm² ▪ conductor: H05VV-F3G 1.0 mm² ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging

1-phase 10A with PVC insulation

- extension leads with PVC insulation are ideal for household use
- conductor cross-section: 1 mm², round sockets, with or without switch
- available in various lengths, child safety shutters, max. load 2,300
- available in white, black and dark green colors – blend in with the interior

PC1513 1/5/-/15

19 02 350 300

8 592920 008331



- length: 3 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1213 1/5/-/20

19 02 120 300

8 592920 140420



- length: 3 m
- number of sockets: 2× 2P + PE
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G 1.0 mm²
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC1415 1/5/-/15

19 02 340 500

8 592920 008324



- length: 5 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC1413 1/5/-/20

19 02 340 300

8 595025 365507



- length: 3 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

PC1315 1/5/-/15

19 02 330 500

8 592920 008317



- length: 5 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC1313 1/5/-/20

19 02 330 300

8 592920 008300



- length: 3 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC0513 1/5/-/10

19 02 250 300

8 592920 008294



- length: 3 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC0415 1/5/-/15

19 02 240 500

8 595025 365446



- length: 5 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC0413 1/5/-/20

19 02 240 300

8 592920 008287



- length: 3 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC0315 1/5/-/15

19 02 230 500

8 592920 008270



- length: 5 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC0313 1/5/-/20

19 02 230 300

8 595025 365415



- length: 3 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1615 1/-/-/10

19 02 160 500

8 595025 309631



- length: 5 m
- number of sockets: 6
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1613 1/-/-/10

19 02 160 300

8 595025 309624



- length: 3 m
- number of sockets: 6
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1517 1/-/-/10

19 02 150 700

8 595025 302311



- length: 7 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P1515 1/5/-/15

19 02 150 500



- length: 5 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1513 1/5/-/15

19 02 150 300



- length: 3 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1510 1/-/-/6

19 02 151 000



- length: 10 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1410 1/-/-/8

19 02 141 000



- length: 10 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0213 1/5/-/20

19 02 020 300



- length: 3 m
- number of sockets: 2× 2P + PE
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G 1.0 mm²
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0313 1/5/-/20

19 02 030 300



- length: 3 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0315 1/5/-/15

19 02 030 500



- length: 5 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0317 1/-/-/12

19 02 030 700



- length: 7 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0310 1/-/-/8

19 02 031 000



- length: 10 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0413 1/5/-/20

19 02 040 300



- length: 3 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P0415 1/5/-/15

19 02 040 500

8 595025 301093



- length: 5 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0417 1/-/-/10

19 02 040 700

8 595025 302281



- length: 7 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0410 1/5/-/10

19 02 041 000

8 595025 301079



- length: 10 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0513 1/5/-/10

19 02 050 300

8 595025 301147



- length: 3 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0515 1/5/-/15

19 02 050 500

8 595025 301130



- length: 5 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0517 1/5/-/10

19 02 050 700

8 595025 302335



- length: 7 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0510 1/-/-/6

19 02 051 000

8 595025 301116



- length: 10 m
- number of sockets: 5
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0613 1/5/-/10

19 02 060 300

8 595025 309563



- length: 3 m
- number of sockets: 6
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0615 1/-/-/10

19 02 060 500

8 595025 309570



- length: 5 m
- number of sockets: 6
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1313 1/5/-/20

19 02 130 300

8 595025 301451



- length: 3 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P1315 1/5/-/15

19 02 130 500

8 595025 301468

5 m | 3×



- length: 5 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1317 1/-/-/10

19 02 130 700

8 595025 302298

7 m | 3×



- length: 7 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1310 1/-/-/6

19 02 131 000

8 595025 301482

10 m | 3×



- length: 10 m
- number of sockets: 3
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1413 1/5/-/20

19 02 140 300

8 595025 301505

3 m | 4×



- length: 3 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1415 1/5/-/15

19 02 140 500

8 595025 301512

5 m | 4×



- length: 5 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1417 1/-/-/10

19 02 140 700

8 595025 302304

7 m | 4×



- length: 7 m
- number of sockets: 4
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

Extension Cords GoSmart

EMOS GoSmart

- remote on/off switching of connected appliances
- overview of electricity consumption of connected appliances
- scheduling and automatic ON/OFF settings
- connection to home network via WiFi protocol
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store | Google Play

length: 2 m ▪ number of sockets: 4× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G ▪ type of insulation: PVC ▪ children protection ▪ USB output: 1× USB-A 2,1 A, 1× USB-C 3 A (QC 2.0) total: 24 W ▪ packaging: 1 ks, box ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ control by voice assistants ▪ notifications to the mobile app





Wi Fi | 2 m | 4× | 1× USB-A | 1× USB-C Fast charge

8 592920 141588

P1412SM 1/-/-/8

19 02 940 203

Power supply extension cords and sockets

FRENCH Power supply extension cords and sockets

Single socket extension cords

1-phase 16A with rubber insulation

- extension cable with 1 socket, length: 5–30 m
- neoprene or rubber insulation, IP44 enclosure
- conductor cross-section: 1.5 or 2.5 mm², max. load: 3 680 W
- black colour, round socket with lid, child socket covers

P01710R 1/-/-/3

19 01 011 003

8 592920 069998

10 m | H07RN-F3G 2.5 mm²



- length: 10 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01725R 1/-/-/2

19 01 012 504

8 592920 070017

25 m | H07RN-F3G 2.5 mm²



- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0601 1/-/-/6

19 01 021 001

8 592920 069783

10 m | H05RR-F3G 1.5 mm²



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P0602 1/-/-/4

19 01 021 500

8 592920 069790

15 m | H05RR-F3G 1.5 mm²



- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P0603 1/-/-/3

19 01 022 001

8 592920 069806

20 m | H05RR-F3G 1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P0604 1/-/-/2

19 01 022 500

8 592920 069813

25 m | H05RR-F3G 1.5 mm²



- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P01710 1/-/-/3

19 01 211 000

8 592920 011027



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, packet

P01720 1/-/-/2

19 01 212 000

8 592920 011034



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, packet

P01730 1/-/-/2

19 01 213 000

8 592920 011041



- length: 30 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, packet

P01705 1/-/-/12

19 02 010 500

8 592920 069974



- length: 5 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

1-phase 16A with PVC weatherproof insulation

- extension lead with weather-proof insulation
- IP44 protection allows outdoor use
- conductor cross-section: 1.5 mm², max. load 3,680 W
- available in various lengths, blue color
- round socket with cover, child safety shutters

P01410W 1/-/-/6

19 01 611 000

8 592920 123614



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 250 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: AT-N05V3V3-F
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P01420W 1/-/-/2

19 01 612 000

8 592920 123638



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 250 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: AT-N05V3V3-F
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

1-phase 16A with PVC insulation

- extension cables available in various lengths and colors
- conductor cross-section: 1.5 m², max. load: 3 680 W
- PVC insulation – ideal for the garage or workshop
- orange reflective colour – always visible to avoid tripping
- round socket, child socket covers

P0111 1/5/-/20

19 01 010 150

8 595025 309662



- length: 1.5 m
- number of sockets: 1
- maximum load: 3 680 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0112 1/5/-/20

19 01 010 200

8 595025 302113



- length: 2 m
- number of sockets: 1
- maximum load: 3 680 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0113R 1/5/-/20

19 01 010 302

8 592920 112359



- length: 3 m
- number of sockets: 1
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0115R 1/-/-/20

19 01 010 504

8 592920 112380



- length: 5 m
- number of sockets: 1
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0115RZ 1/-/-/20

19 01 010 505

SALE

8 592920 112441



- length: 5 m
- number of sockets: 1
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0117R 1/-/-/20

19 01 010 701

8 592920 112403



- length: 7 m
- number of sockets: 1
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0110R 1/-/-/10

19 01 011 004

8 592920 112427



- length: 10 m
- number of sockets: 1
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P01120 1/-/-/4

19 01 012 000

8 595025 340795



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P01125 1/-/2/4

19 01 012 500

8 595025 311849

25 m | H05VV-F3G 1.5 mm²



- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P01130 1/-/-/4

19 01 013 000

8 595025 343345

30 m | H05VV-F3G 1.5 mm²



- length: 30 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P01140 1/-/-/2

19 01 014 000

8 595025 343352

40 m | H05VV-F3G 1.5 mm²



- length: 40 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

PC0111 1/5/-/20

NEW

19 01 210 150

8 592920 157657

1.5 m | H05VV-F3G 1.0 mm²



- length: 1.5 m
- number of sockets: 1× 2P + PE
- maximum load: 3 680 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, foil

PC0113R 1/5/-/20

NEW

19 01 210 301

8 592920 157688

3 m | H05VV-F3G 1.5 mm²



- length: 3 m
- number of sockets: 1× 2P + PE
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, foil

PC0115R 1/-/-/20

NEW

19 01 210 500

8 592920 157725

5 m | H05VV-F3G 1.5 mm²



- length: 5 m
- number of sockets: 1× 2P + PE
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, foil

P01110 1/-/-/10

NEW

19 01 811 005

8 592920 154434

10 m | H05VV-F3G 1.5 mm²



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

1-phase 10A with PVC insulation

- extension cables available in various lengths and colors
- PVC insulation – ideal for the interior
- conductor: 1 mm², round socket, child socket covers
- in white, dark green or orange colour

P0113 1/5/-/20

19 01 010 300

8 595025 302120

3 m | H05VV-F3G 1.0 mm²



- length: 3 m
- number of sockets: 1
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0115 1/-/-/20

19 01 010 500

8 595025 302137

5 m | H05VV-F3G 1.0 mm²



- length: 5 m
- number of sockets: 1
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0117 1/-/-/20

19 01 010 700

8 595025 302144

7 m | H05VV-F3G 1.0 mm²



- length: 7 m
- number of sockets: 1
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0110 1/-/-/10

19 01 011 000

8 595025 302151

10 m | H05VV-F3G 1.0 mm²



- length: 10 m
- number of sockets: 1
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P0115Z 1/-/-/20

19 12 310 500

8 595025 378491

5 m | H05VV-F3G 1.0 mm²



- length: 5 m
- number of sockets: 1
- maximum load: 2 300 W
- conductor cross section: 1.0 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

Two-cores PVC

- extension cable with one socket
- PVC insulation – ideal for the interior

PC01305 1/-/10/30

19 02 210 500

NEW

8 592920 150986

5 m | H03VVH2-F 2× 0.75 mm²



- length: 5 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC01303 1/-/10/30

19 02 210 300

NEW

8 592920 151013

3 m | H03VVH2-F 2× 0.75 mm²



- length: 3 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

PC01301 1/-/10/60

19 02 210 150

NEW

8 592920 151044

1.5 m | H03VVH2-F 2× 0.75 mm²



- length: 1.5 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P01305 1/-/10/30

19 02 010 501

8 592920 139301

5 m | H03VVH2-F 2× 0.75 mm²



- length: 5 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P01303 1/-/10/30

19 02 010 300

8 592920 064504

3 m | H03VVH2-F 2× 0.75 mm²



- length: 3 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P01301 1/-/10/60

19 02 010 150

8 592920 139271

1.5 m | H03VVH2-F 2× 0.75 mm²



- length: 1.5 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P01320R 1/-/-/4

19 01 012 016

8 592920 119297

20 m | H05VV-F2 1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F2
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

Power supply extension cords and sockets

FRENCH Power supply extension cords and sockets

Individual outlets

- rewirable multiple sockets
- max. current load: 16 A, IP20 protection
- plastic, white, with or without switch
- equipped with child safety shutters

P0300N 1/5/50/100

19 03 030 001

8 592920 076941



- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0300T 1/-/10/40

19 03 030 002

8 592920 113288



- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0400N 1/5/-/40

19 03 040 002

8 592920 076958



- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0500N 1/5/-/70

19 03 050 001

8 592920 076965



- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0500T 1/-/10/40

19 03 050 002

8 592920 113349



- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0600N 1/5/25/50

19 03 060 001

8 592920 111543



- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P1300N 1/5/-/40

19 03 130 001

8 592920 076934





- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1300T 1/-/10/40

19 03 130 002

8 592920 113318





- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1400N 1/5/-/70

19 03 140 001

8 592920 076927





- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1500N 1/5/25/50

19 03 150 001

8 592920 076910





- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1500T 1/-/-/25

19 03 150 002

8 592920 113370





- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1600N 1/5/25/50

19 03 160 001

8 592920 111581





- product: socket field
- type: FRENCH
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

Power supply extension cords and sockets

SCHUKO Power supply extension cords and sockets

Extension cords

1-phase 16A with rubber insulation

- neoprene extension lead – resistant to water (IP44) and extreme temperatures
- conductor cross-section: 1.5 mm², max. load 3 680 W
- round sockets, child safety shutters, available in various lengths
- illuminated switch with rubber cover
- mounting holes on the power strip body for screwing e.g. to a wall

P14251 1/-/-/6

19 22 340 501

8 592920 076552





- length: 5 m
- number of sockets: 4× 2P + PE GERMAN
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: rubber/neopren
- conductor: H07RN-F3G 1.5 mm²
- material of the sockets + plugs: plastic /
- packaging: 1 pc, foil

P14231 1/-/-/10

19 22 140 302

8 592920 055496





- length: 3 m
- number of sockets: 4× 2P + PE GERMAN
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: rubber/neopren
- conductor: H07RN-F3G 1.5 mm²
- material of the sockets + plugs: plastic /
- packaging: 1 pc, foil

P14201 1/-/-/6

19 22 341 000

8 592920 076569





- length: 10 m
- number of sockets: 4× 2P + PE GERMAN
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: rubber/neopren
- conductor: H07RN-F3G 1.5 mm²
- material of the sockets + plugs: plastic /
- packaging: 1 pc, foil

1-phase 16A with PVC insulation

- extension cables with PVC insulation are ideal for household
- conductor: 1.5 mm², max. load: 3 680 W
- round sockets, with or without switch
- available in various lengths, child socket covers
- in white – to blend discreetly into the interior

P0321R 1/5/-/20

19 22 030 153

8 592920 052662





length: 1.5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1321R 1/-/-/15

19 22 130 156

8 592920 092644



length: 1.5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0323R 1/5/-/20

19 22 030 308

8 592920 016336





length: 3 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1323R 1/5/-/20

19 22 130 308

8 592920 016350



length: 3 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0325R 1/5/-/15

19 22 030 508

8 592920 016343





length: 5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1325R 1/-/-/10

19 22 130 508

8 592920 016367



length: 5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0421R 1/5/-/20

19 22 040 152

8 592920 052679





length: 1.5 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1421R 1/-/-/15

19 22 140 152

8 592920 092651



length: 1.5 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P0423R 1/5/-/20

19 22 040 302

8 592920 052747





length: 3 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1423R 1/-/-/10

19 22 140 303

8 592920 064436



length: 3 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0425R 1/5/-/15

19 22 040 502

8 592920 064429





length: 5 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1425R 1/5/-/15

19 22 140 503

8 592920 064443



length: 5 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0521R 1/5/-/15

19 22 050 153

8 592920 052686





length: 1.5 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1521R 1/-/-/15

19 22 150 154

8 592920 092668



length: 1.5 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0523R 1/-/-/15

19 22 050 308

8 592920 016374





length: 3 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1523R 1/-/-/10

19 22 150 308

8 592920 016398



length: 3 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0525R 1/-/-/10

19 22 050 508

8 592920 016381





length: 5 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1525R 1/-/-/10

19 22 150 508

8 592920 016404



length: 5 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P0623R 1/-/-/10

19 22 060 302

8 592920 107416



length: 3 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1621R 1/-/-/15

19 22 160 152

8 592920 092675



length: 1.5 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0625R 1/-/-/10

19 22 060 502

8 592920 107423



length: 5 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1623R 1/-/-/10

19 22 160 302

8 592920 064450



length: 3 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1625R 1/-/-/10

19 22 160 502

8 592920 064467



length: 5 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

PC1321R 1/-/-/15

19 22 330 152

8 592920 092682



length: 1.5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

PC1421R 1/-/-/15

19 22 340 151

8 592920 092699



length: 1.5 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

PC1423R 1/-/-/10

19 22 340 301

8 592920 107430



length: 3 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

PC1425R 1/-/-/15

19 22 340 502

8 592920 107447



length: 5 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

PC1521R 1/-/-/15

19 22 350 151

8 592920 092705



length: 1.5 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

PC1621R 1/-/-/15

19 22 360 150

8 592920 092712



length: 1.5 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0321 1/5/-/20

19 22 030 150

8 595025 324870



length: 1.5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0322 1/5/-/20

19 22 030 200

8 595025 313508



length: 2 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0421 1/5/-/20

19 22 040 150

8 595025 324887



length: 1.5 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0521 1/5/-/15

19 22 050 150

8 595025 324894



length: 1.5 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0622 1/5/-/15

19 22 060 200

8 595025 315441



length: 2 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1321 1/5/-/20

19 22 130 150

8 595025 324900



length: 1.5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1322 1/5/-/20

19 22 130 200

8 595025 314062



length: 2 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1422 1/5/-/20

19 22 140 200

8 595025 315472



length: 2 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1522 1/5/-/15

19 22 150 200

8 595025 314093



length: 2 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P1622 1/-/-/10

19 22 160 200

8 595025 315489





length: 2 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

PC1321 1/5/-/20

19 22 330 150

8 592920 013069




length: 1.5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P04219GU 1/-/3/12

19 22 040 191

8 592920 080306





length: 1.9 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 2× USB ⊡ 2.1 A max. (10.5 W) ▪ material of the sockets + plugs: PC ▪ packaging: 1 pc, box

PS1721 1/5/10/20

19 22 570 150

8 595025 365781



length: 1.5 m ▪ number of sockets: 3× 2P + PE + 4× 2P GERMAN ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0221U 1/5/-/20

19 02 020 150

8 592920 129548





length: 1.5 m ▪ number of sockets: 2× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 2× USB-A + 1× USB-C ; 5 V DC; total ∑ 3,4 A (17 W) max. ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1321PD 1/-/-/10

19 02 330 154

8 592920 134016



length: 1.5 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 2× USB-A QC 3.0 18 W, 1× USB-C PD 20 W, total: 3,4 A/17 W max. ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, box

P02214E 1/-/12/24

19 22 020 141

SALE

8 592920 141175





length: 1.4 m ▪ number of sockets: 2× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 2× USB-A + 1× USB-C ; 5 V DC; total ∑ 3,4 A (17 W) max. ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0422 1/5/-/20

19 22 040 400

8 592920 135907



length: 2 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0522 1/5/-/20

19 22 050 201

8 592920 135938





length: 2 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P0621 1/5/-/15

19 22 060 151

8 592920 135969



length: 1.4 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

EMOS A brand of Legrand

www.emos.eu

Order Code Item Number | Packaging Type

P0222CQ 1/-/5/10

19 22 120 200

8 592920 132821



length: 2 m ▪ number of sockets: 2× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 2× USB-A 12 W, 1× USB-C 15 W, total: 3 A–15 W + Qi 10 W, total USB + wireless charging: 25 W ▪ material of the sockets + plugs: PC ▪ packaging: 1 pc, box

P1322PD 1/-/5/10

19 22 130 202

SALE

8 592920 132760



length: 2 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 1× USB-A, 1× USB-C, total: 3.4 A – 17 W (fast charging) ▪ material of the sockets + plugs: PC ▪ packaging: 1 pc, box

P1322CU 1/5/-/10

19 22 130 203

8 592920 132869



length: 2 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 1× USB-A, 1× USB-C, total: 3.4 A – 17 W ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1421 1/5/-/20

19 22 140 153

8 592920 135990



length: 1.4 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1521 1/5/-/15

19 22 150 155

8 592920 136027



length: 1.4 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1523CU 1/5/-/10

19 22 150 306

8 592920 132906



length: 3 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 1× USB-A, 1× USB-C, total: 3.4 A – 17 W ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1621 1/5/-/10

19 22 160 153

8 592920 136058



length: 1.4 m ▪ number of sockets: 6× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging

P1322FC 1/-/5/10

19 22 130 204

8 592920 144961



length: 2 m ▪ number of sockets: 3× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 1× USB-A, 1× USB-C, total: 3,1 A – 15,5 W (fast charging) ▪ material of the sockets + plugs: PC ▪ packaging: 1 pc, box

P1523FC 1/-/5/10

19 22 150 309

8 592920 145029



length: 3 m ▪ number of sockets: 5× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 1× USB-A, 1× USB-C, total: 3,1 A – 15,5 W (fast charging) ▪ material of the sockets + plugs: PC ▪ packaging: 1 pc, box

Extension Cords GoSmart

EMOS GoSmart

- remote on/off switching of connected appliances
- overview of electricity consumption of connected appliances
- schedule creation and automatic ON/OFF settings
- connection to the home network via WIFI protocol
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

length: 2 m ▪ number of sockets: 4× 2P + PE GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ USB output: 1× USB-A 2,1 A, 1× USB-C 3 A (QC 2.0) total: 24 W ▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, box ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ control by voice assistants ▪ notifications to the mobile app





Wi Fi | 2 m | 4× | 1× USB-A | 1× USB-C Fast charge

8 592920 141601

P1422SM 1/-/-/8

19 22 940 201

Power supply extension cords and sockets

SCHUKO Power supply extension cords and sockets

Single socket extension cords

1-phase 16A with rubber insulation

- extension lead with neoprene and rubber insulation
- IP44 protection allows outdoor use
- conductor cross-section: 1.5 mm² or 2.5 mm², max. load 3 680 W
- available in various lengths, black color
- round sockets with covers, child safety shutters

P01805 1/-/-/12

19 21 010 504



8 592920 064566

5 m | H07RN-F3G 1.5 mm²

- length: 5 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01810 1/-/-/3

19 21 031 000



8 592920 011058

10 m | H07RN-F3G 1.5 mm²

- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P01820 1/-/-/2

19 21 032 000

8 592920 011065

20 m | H07RN-F3G 1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01830 1/-/-/2

19 21 033 000

8 592920 011072

30 m | H07RN-F3G 1.5 mm²



- length: 30 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01810R 1/-/-/3

19 21 011 003

8 592920 064573

10 m | H07RN-F3G 2.5 mm²



- length: 10 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01825R 1/-/-/2

19 21 012 502

8 592920 064580

25 m | H07RN-F3G 2.5 mm²



- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0701 1/-/-/6

19 21 021 000

8 592920 069820

10 m | H05RR-F3G 1.5 mm²



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0702 1/-/-/4

19 21 021 502

8 592920 069837

15 m | H05RR-F3G 1.5 mm²



- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0703 1/-/-/3

19 21 022 000

8 592920 069844

20 m | H05RR-F3G 1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0704 1/-/-/2

19 21 022 502

8 592920 069851

25 m | H05RR-F3G 1.5 mm²



- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

1-phase 16A with PVC weatherproof insulation

- extension cable with weather-proof insulation
- IP44 protection allows outdoor use
- wire cross-section: 1.5 mm², max. load 3 680 W
- available in various lengths, blue color
- round socket with cover, child safety covers

P01520W 1/-/-/2

19 21 612 000

8 592920 123676



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 250 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: AT-N05V3V3-F
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P01510W 1/-/-/6

19 21 611 000

8 592920 123652



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 250 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: AT-N05V3V3-F
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

1-phase 16A with PVC insulation

- extension leads available in various lengths and colors
- conductor cross section: 1.5 mm, max. load: 3 680 W
- PVC insulation - ideal for the garage or workshop
- orange reflective colour - always visible to avoid tripping
- round socket, child socket covers

P0123R 1/5/-/20

19 21 010 302

8 592920 064474



- length: 3 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P0125R 1/-/-/20

19 21 010 503

8 592920 064481



- length: 5 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0127R 1/-/-/20

19 21 010 701

8 592920 107409



- length: 7 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P0120R 1/-/-/10

19 21 011 002

8 592920 064498



- length: 10 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P0122 1/5/-/20

19 21 010 202

SALE

8 592920 107393

2 m | H05VV-F3G 1.0 mm²



- length: 2 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P01215R 1/-/-/6

19 21 011 502

8 592920 064528

15 m | H05VV-F3G 1.5 mm²



- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01220R 1/-/-/6

19 21 012 001

8 592920 064535

20 m | H05VV-F3G 1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01225R 1/-/-/4

19 21 012 500

8 592920 064542

25 m | H05VV-F3G 1.5 mm²



- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01230R 1/-/-/4

19 21 013 001

8 592920 107386

30 m | H05VV-F3G 1.5 mm²



- length: 30 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- children protection
- packaging: 1 pc, shrink

P0121 1/5/-/20

19 22 010 150

8 592920 135877

1.4 m | 1×



- length: 1.4 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

PC0121R 1/5/-/20

19 21 210 150

NEW

8 592920 157732

1.5 m | H05VV-F3G 1.5 mm²



- length: 1.5 m
- number of sockets: 1× 2P + PE
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

PC0123R 1/5/-/20

19 21 210 300

NEW

8 592920 157763

3 m | H05VV-F3G 1.5 mm²



- length: 3 m
- number of sockets: 1× 2P + PE
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

PC0125R 1/-/-/20

19 21 210 501

NEW

8 592920 157794

5 m | H05VV-F3G 1.5 mm²



- length: 5 m
- number of sockets: 1× 2P + PE
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P01210R 1/-/-/10

19 21 811 005

NEW

8 592920 154458

10 m | H05VV-F3G 1.5 mm²



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

Power supply extension cords and sockets

SCHUKO Power supply extension cords and sockets

Individual outlets

- demountable multi sockets
- max. current load: 16 A, IP20 enclosure
- plastic, white, with or without switch
- fitted with child socket covers

P0320 1/5/-/40

19 23 030 000



- product: socket field
- type: SCHUKO
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0520 1/5/-/30

19 23 050 000



- product: socket field
- type: SCHUKO
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1320 1/5/-/45

19 23 130 000



- product: socket field
- type: SCHUKO
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1520 1/5/-/20

19 23 150 000



- product: socket field
- type: SCHUKO
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

Surge protectors

Surge protectors EMOS FRENCH

- extension cord with surge protector
- protects your devices against power surges
- surge protectors available in various variants
- black/white design, illuminated switch, child socket covers

- rated voltage: 250 V~, 50 Hz
- maximum load: 3 680 W
- energy absorption: 918 J (L-N, L-PE, PE-N)
- protection level Up: 775 V
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- tel./Fax/DSL protection: yes, RJ45, RJ11 (100 Mb/s)
- surge protector indicator
- dimensions: 75 × 65 × 100 mm
- packaging: 1 pc, blister





P53893 1/-/-/20

19 09 010 000

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 233 × 53 × 40 mm
- packaging: 1 pc, box





P54013 1/-/-/15

19 09 030 150

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 233 × 53 × 40 mm
- packaging: 1 pc, box





P54014 1/-/-/15

19 09 030 151

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 900 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- connection indicator
- surge protector indicator
- dimensions: 342 × 66 × 50 mm
- packaging: 1 pc, box





EMI/RFI Free | 2 m | 4×

€ 50 000 GUARANTEE

8 592920 075081

P54012
19 09 040 200

1/-/-/6

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 1 800 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- antenna (coaxial protection): yes, IEC
- connection indicator
- surge protector indicator
- dimensions: 342 × 66 × 50 mm
- packaging: 1 pc, box





EMI/RFI Free | 2 m | 4×

€ 50 000 GUARANTEE

8 592920 075098

P54022
19 09 040 201

1/-/-/6

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 150 J
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 4 kV
- response time: <25 ns
- overload protection
- surge protector indicator
- dimensions: 330 × 54 × 55 mm
- packaging: 1 pc, box





1.5 m | 5×

€ 2 000 GUARANTEE

8 595025 385970

P53871
19 09 050 153

1/-/-/10

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 150 J
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 4 kV
- response time: <25 ns
- overload protection
- surge protector indicator
- dimensions: 330 × 54 × 55 mm
- packaging: 1 pc, box





3 m | 5×

€ 2 000 GUARANTEE

8 595025 385987

P53872
19 09 050 154

1/-/-/10

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 150 J
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 4 kV
- response time: <25 ns
- overload protection
- surge protector indicator
- dimensions: 330 × 54 × 55 mm
- packaging: 1 pc, box





1.5 m | 5×

€ 2 000 GUARANTEE

8 595025 385994

P53873
19 09 050 301

1/-/-/10

Order Code Item Number	Packaging Type

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 150 J
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 4 kV
- response time: <25 ns
- overload protection
- surge protector indicator
- dimensions: 330 × 54 × 55 mm
- packaging: 1 pc, box









8 595025 386007

P53874
19 09 050 302

1/-/-/10

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 150 J
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 4 kV
- response time: <25 ns
- overload protection
- surge protector indicator
- dimensions: 330 × 54 × 55 mm
- packaging: 1 pc, box









8 595025 394767

P53876
19 09 050 503

1/-/-/10

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box









8 592920 145975

P54015
19 09 060 151

1/-/-/10

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box









8 592920 146033

P54018
19 09 060 152

1/-/-/10

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box









8 592920 145999

P54016
19 09 060 301

1/-/-/10

EMOS A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator

- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box





3 m | 6×

€ 2 000 GUARANTEE

8 592920 146057

P54019 1/-/-/10

19 09 060 302

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator

- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box





5 m | 6×

€ 2 000 GUARANTEE

8 592920 146019

P54017 1/-/-/10

19 09 060 500

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 150 J
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 4 kV
- response time: <25 ns
- overload protection
- surge protector indicator

- dimensions: 445 × 54 × 55 mm
- packaging: 1 pc, box





1.5 m | 8×

€ 2 000 GUARANTEE

8 595025 386052

P53898 1/-/-/10

19 09 080 152

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.0 mm²
- energy absorption: 150 J
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 4 kV
- response time: <25 ns
- overload protection
- surge protector indicator

- dimensions: 445 × 54 × 55 mm
- packaging: 1 pc, box





1.5 m | 8×

€ 2 000 GUARANTEE

8 595025 386069

P53899 1/-/-/10

19 09 080 153

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 1 800 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- tel./Fax/DSL protection: yes, tel./fax /DSL,RJ11/RJ
- antenna (coaxial protection): yes, IEC

- connection indicator
- surge protector indicator
- dimensions: 398 × 110 × 50 mm
- packaging: 1 pc, box





EMI/RFI Free | 3 m | 8×

€ 50 000 GUARANTEE

8 592920 075104

P54052 1/-/-/6

19 09 480 300

Surge protectors EMOS SCHUKO

- extension lead with surge protection
- protects your devices against power surges
- surge protectors available in various versions
- available in black/white design, illuminated switch and child safety shutters

---

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 1 800 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- tel./Fax/DSL protection: yes, tel./fax /DSL,RJ11/RJ
- antenna (coaxial protection): yes, IEC
- connection indicator
- surge protector indicator
- dimensions: 398 × 110 × 50 mm
- packaging: 1 pc, box







8 592920 080238

P54252 1/-/-/6

19 09 480 301

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 1 800 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- antenna (coaxial protection): yes, IEC
- connection indicator
- surge protector indicator
- dimensions: 342 × 66 × 50 mm
- packaging: 1 pc, box







8 592920 080221

P54222 1/-/-/6

19 09 040 203

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box







8 592920 146156

P54219 1/-/-/10

19 09 060 304

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box







8 592920 146132

P54218 1/-/-/10

19 09 060 154

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box




5 m | 6×

8 592920 146118

P54217 1/-/-/10

19 09 060 501

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surface protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box




3 m | 6×

8 592920 146095

P54216 1/-/-/10

19 09 060 303

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 358 × 53 × 40 mm
- packaging: 1 pc, box




1.5 m | 6×

8 592920 146064

P54215 1/-/-/10

19 09 060 153

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 233 × 53 × 40 mm
- packaging: 1 pc, box




1.5 m | 3×

8 592920 145951

P54214 1/-/-/15

19 09 030 153

- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 380 J L-N
- protection level Up: 1.3 kV (L/N)
- open-circuit voltage U0C: 6 kV (L/N)
- response time: 1 ns
- overload protection: yes, 10 A/ 250V~
- surge protector indicator
- dimensions: 233 × 53 × 40 mm
- packaging: 1 pc, box




1.5 m | 3×

8 592920 145937

P54213 1/-/-/15

19 09 030 152

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 900 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage UOC: 6 kV
- response time: <1 ns
- connection indicator
- surge protector indicator
- dimensions: 342 × 66 × 50 mm
- packaging: 1 pc, box





EMI/RFI Free | 2 m | 4×

8 592920 080191

P54212 1/-/-/6

19 09 040 202

Assembled cords

1-phase rubber

- extension cable with rubber insulation
- IP65 protection for outdoor use
- conductor cross-section: 1.5 or 2.5 mm², max. load 3 680 W
- available in various lengths
- black color, round socket with cover, child safety shutters

PM0501 1/-/-/6

19 14 031 100

8 595025 381170 | 10 m | H05RR-F3G 1.5 mm²



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP65
- number of sockets: 1
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

PM0502 1/-/-/4

19 14 031 150

8 595025 381187 | 15 m | H05RR-F3G 1.5 mm²



- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP65
- number of sockets: 1
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

PM0503 1/-/-/4

19 14 031 200

8 595025 381194 | 20 m | H05RR-F3G 1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP65
- number of sockets: 1
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

PM0504 1/-/-/2

19 14 031 250

8 595025 381200 | 25 m | H05RR-F3G 1.5 mm²



- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP65
- number of sockets: 1
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

PM0505 1/-/-/2

19 14 031 300

SALE

8 595025 381217

30 m | H05RR-F3G 1.5 mm²



- length: 30 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP65
- number of sockets: 1
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

PM1011 1/-/-/2

19 14 090 072

8 595025 389916

20 m | H05RR-F 2.5 mm²



- length: 20 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP65
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 3C × H05RR-F
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

3-phase rubber

- 400 V~ extension cable, available in various lengths
- rubber insulation, ideal for outdoor use, enclosure: IP44
- conductor cross-section: 2.5 or 4.0 mm²
- black colour

PM0902 1/-/-/2

19 14 071 100

8 595025 381088

10 m | H05RR-F 2.5 mm²



- length: 10 m
- conductor cross section: 2.5 mm²
- voltage: 400 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H05RR-F
- max. unreeled load: 16 A max./11 040 W
- children protection: no
- packaging: 1 pc, packet

PM0904 1/-/-/2

19 14 071 200

8 595025 381101

20 m | H05RR-F 2.5 mm²



- length: 20 m
- conductor cross section: 2.5 mm²
- voltage: 400 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H05RR-F
- max. unreeled load: 16 A max./11 040 W
- children protection: no
- packaging: 1 pc, packet

PM0905 1/-/-/1

19 14 071 250

8 595025 381118

25 m | H05RR-F 2.5 mm²



- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 400 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H05RR-F
- max. unreeled load: 16 A max./11 040 W
- children protection: no
- packaging: 1 pc, packet

PM1102 1/-/-/2

19 14 081 102

8 592920 110065

10 m | H07RN-F 4.0 mm²



- length: 10 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

PM1103 1/-/-/1

19 14 081 103

8 592920 110072

15 m | H07RN-F 4.0 mm²



- length: 15 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

PM1104 1/-/-/1

19 14 081 104

8 592920 110089

20 m | H07RN-F 4.0 mm²



- length: 20 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

PM1105

19 14 081 105

1/-/-/1



8 592920 110096

25 m

H07RN-F
4.0 mm²

- length: 25 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

Cable reels

FRENCH Cable reels

3-phase rubber

- 3-phase extension cable on reel with neoprene insulation
- immune to water (IP44), extreme temperatures and oils
- power extension cable reel with thermal fuse
- stable stand, reel and rubber-coated grip

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V~/400 V~
- current: 13 A
- IP rating: IP44
- number of sockets: 3
- thermal fuse
- conductor: H07RN-F5G
- max. reeled load: 230 V~: 4.35 A max./1 000 W; 400
- max. unreeled load: 230 V~: 13 A max./3 000 W; 400
- children protection
- packaging: 1 pc, box





25 m

H07RN-F
1.5 mm²

IP44

8 592920 091593

P193250

19 08 432 500

1/-/-/1

1-phase weatherproof PVC

- 1-phase extension cable on cable-reel, weather-proof insulation
- resistant to water (IP44), extreme temperatures and oils
- EMOS extension cable with thermal fuse
- stable stand, winding reel and rubberised handle

- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP44
- number of sockets: 3
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.35 A max./1 000 W
- max. unreeled load: 13.04 A max./3 000 W
- children protection: no
- other functions: 2× USB-A ∑2.1 A max.
- packaging: 1 pc, box







8 592920 123539

P08520W 1/-/-/1

19 08 732 000

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box







8 592920 123492

P08525W 1/-/-/1

19 08 742 500

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box







8 592920 123515

P08550W 1/-/-/1

19 08 745 000

1-phase rubber

- 1-phase extension cable on drum, neoprene/rubber insulation
- resistant to water (IP44), extreme temperatures and oils
- EMOS extension cable with thermal fuse
- stable stand, winding drum and rubberised handle

- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13.04 A max./3 000 W
- children protection: no
- other functions: LED reflect. 20 W/1 600 lm/6 500 K
- packaging: 1 pc, box





20 m | H05RR-F3G 1.5 mm² | IP44 | LED light | 3 YEARS WARRANTY

8 592920 107591

P08420 1/-/-/1

19 08 242 000

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box





25 m | H05RR-F3G 1.5 mm² | IP44 | Impact resistance

8 595025 392640

P084251 1/-/-/1

19 08 242 503

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





25 m | H05RR-F3G 1.5 mm² | IP44 | Metal body | 3 YEARS WARRANTY

8 592920 104002

P084255 1/-/-/1

19 08 242 514

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box





50 m | H05RR-F3G 1.5 mm² | IP44 | Impact resistance | 3 YEARS WARRANTY

8 595025 392657

P084501 1/-/-/1

19 08 245 003

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box







8 592920 104019

P084505 1/-/-/1

19 08 245 012

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 4.35 A max./1 000 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box







8 592920 084823

P084254 1/-/-/1

19 08 442 500

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 4.35 A max./1 000 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box







8 592920 084847

P084504 1/-/-/1

19 08 445 000

- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 5.6 A max./1 300 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box







8 592920 036716

P084253 1/-/-/1

19 08 542 500

- length: 40 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 5.2 A max./1 200 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box







8 592920 084830

P08440 1/-/-/1

19 08 544 000

- length: 50 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 5.6 A max./1 300 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box




8 592920 036723

P084503 1/-/-/1

19 08 545 000

- length: 25 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 10 A max./2 300 W
- children protection
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box




8 592920 136355

P084256 1/-/-/1

19 08 842 500

1-phase PVC

- 1-phase extension cable on drum with PVC insulation
- EMOS extension cable with thermal fuse
- stable stand, winding drum and rubberized handle

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box




8 595025 325136

P19125 1/-/-/1

19 08 012 501

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box




8 595025 325143

P19150 1/-/-/1

19 08 015 001

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





8 595025 325150

P19425 1/-/-/1

19 08 042 501

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13 A max./3 000 W
- children protection
- packaging: 1 pc, box





8 595025 384850

P19425P 1/-/-/1

19 08 042 510

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop,cable reel brake,switch
- packaging: 1 pc, box





8 592920 058183

P194253 1/-/-/1

19 08 042 512

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





8 595025 325167

P19450 1/-/-/1

19 08 045 001

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13 A max./3 000 W
- children protection
- packaging: 1 pc, box





8 595025 384867

P19450P 1/-/-/1

19 08 045 010

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop,cable reel brake,switch
- packaging: 1 pc, box




8 592920 058190

P194504 1/-/-/1

19 08 045 020

- length: 10 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4 A max./920 W

- max. unreeled load: 10 A max./2 300 W
- children protection
- packaging: 1 pc, box




8 592920 134870

P19410N 1/-/-/6

19 08 141 001

- length: 15 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 3.9 A max./900 W

- max. unreeled load: 10 A max./2 300 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box




8 595025 368225

P194151 1/-/-/2

19 08 141 500

- length: 20 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 3.9 A max./900 W

- max. unreeled load: 10 A max./2 300 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box




8 595025 325181

P19420 1/-/-/1

19 08 142 001

- length: 25 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 10 A max./2 300 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box




8 592920 036860

P194252 1/-/-/1

19 08 142 500

- length: 30 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 10 A max./2 300 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





30 m | H05VV-F3G 1.0 mm² | IP20

8 595025 354235

P19430 1/-/-/1

19 08 143 001

Cable reels

SCHUKO Cable reels

3-phase rubber

- 3-phase extension cable on reel with neoprene insulation
- immune to water (IP44), extreme temperatures and oils
- power extension cable reel with thermal fuse
- stable stand, reel and rubber-coated grip

length: 33 m ▪ conductor cross section: 2.5 mm² ▪ voltage: 230 V~/400 V~ ▪ current: 15 A ▪ IP rating: IP44 ▪ number of sockets: 1 ▪ thermal fuse ▪ conductor: H07RN-F5G ▪ max. reeled load: 230 V~: 6.52 A max./1 500 W; 400 V~: 6.25 A max./2 500 W ▪ max. unreeled load: 230 V~: 15.22 A max./3 500 W; 400 V~: 16 A max./6 400 W ▪ children protection ▪ packaging: 1 pc, box





33 m | H07RN-F 2.5 mm² | IP44

8 592920 028896

P19733 1/-/-/1

19 28 733 300

length: 25 m ▪ conductor cross section: 1.5 mm² ▪ voltage: 230 V~/400 V~ ▪ current: 13 A ▪ IP rating: IP44 ▪ number of sockets: 1 ▪ thermal fuse ▪ conductor: H07RN-F5G ▪ max. reeled load: 230 V~: 4.35 A max./1 000 W; 400 V~: 6.25 A max./2 500 W ▪ max. unreeled load: 230 V~: 13 A max./3 000 W; 400 V~: 12.5 A max./5 000 W ▪ children protection ▪ packaging: 1 pc, box





25 m | H07RN-F 1.5 mm² | IP44

8 592920 025062

P192250 1/-/-/1

19 28 432 500

1-phase weatherproof PVC

- 1-phase extension cable on cable-reel, weather-proof insulation
- resistant to water (IP44), extreme temperatures and oils
- EMOS extension cable with thermal fuse
- stable stand, winding reel and rubberised handle

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





50 m | AT-N05V3V3-F 3G 1.5 mm² | IP44 | Oil resistance | Impact resistance | 3 YEARS WARRANTY

8 592920 123553

P08650W 1/-/-/1

19 28 745 000

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





25 m | AT-N05V3V3-F 3G 1.5 mm² | IP44 | Oil resistance | Impact resistance | 3 YEARS WARRANTY

8 592920 123577

P08625W 1/-/-/1

19 28 742 500

- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP44
- number of sockets: 3
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.35 A max./1 000 W
- max. unreeled load: 13.04 A max./3 000 W
- children protection: no
- other functions: 2× USB-A ∑2.1 A max.
- packaging: 1 pc, box





20 m | AT-N05V3V3-F 3G 1.5 mm² | IP44 | Oil resistance | Impact resistance | 3 YEARS WARRANTY

8 592920 123591

P08620W 1/-/-/1

19 28 732 000

1-phase rubber

- 1-phase extension cable on reel w/ neoprene/rubber insulation
- immune to water (IP44), extreme temperatures and oils
- power extension cable reel with thermal fuse
- stable stand, reel and rubber-coated grip

- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13.04 A max./3 000 W
- children protection: no
- other functions: LED reflect. 20 W/1 600 lm/6 500 K
- packaging: 1 pc, box





15 m | H07RN-F 1.5 mm² | IP44 | Oil resistance | LED light | 5 YEARS WARRANTY

8 592920 091821

P08215 1/-/-/1

19 28 441 500

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 5.6 A max./1 300 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





25 m | H07RN-F 1.5 mm² | IP44 | Oil resistance | 5 YEARS WARRANTY

8 592920 096352

P19222 1/-/-/1

19 28 242 502

- length: 40 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 5.6 A max./1 300 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





40 m | H07RN-F 2.5 mm² | IP44 | Oil resistance | 5 YEARS WARRANTY

8 592920 096376

P19224 1/-/-/1

19 28 544 000

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 5.6 A max./1 300 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





50 m | H07RN-F 1.5 mm² | IP44 | Oil resistance | 5 YEARS WARRANTY

8 592920 096369

P19223 1/-/-/1

19 28 245 003

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- length: 50 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 15 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F
- max. reeled load: 6.52 A max./1 500 W
- max. unreeled load: 15.22 A max./3 500 W
- children protection
- packaging: 1 pc, box




8 592920 056974

P19221 1/-/-/1

19 28 545 011

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, box




8 595025 324924

P08225 1/-/-/1

19 28 242 500

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, box




8 595025 324931

P08250 1/-/-/1

19 28 245 000

- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 6 A max./1 600 W
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, box




8 592920 016152

P19625 1/-/-/1

19 28 542 500

- length: 25 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 10 A max./2 300 W
- children protection
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box




8 592920 136379

P082251 1/-/-/1

19 28 842 500

1-phase PVC

- 1-phase extension cable on reel with PVC insulation
- stable stand, reel and rubber-coated grip
- power extension cable reel with thermal fuse
- some also with backlit switch and guide loop (for reeling)

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13 A max./3 000 W
- children protection
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





8 595025 389923

P19427 1/-/-/1

19 28 042 507

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box





8 592920 064153

P092251 1/-/-/1

19 28 042 504

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop,cable reel brake,switch
- packaging: 1 pc, box





8 592920 064160

P092501 1/-/-/1

19 28 045 003

- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 6 A max./1 380 W

- max. unreeled load: 16 A max./3 600 W
- children protection
- packaging: 1 pc, box





8 595025 350435

P09225M 1/-/-/1

19 28 042 501

- length: 40 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 6 A max./1 380 W
- max. unreeled load: 16 A max./3 600 W
- children protection
- packaging: 1 pc, box






8 595025 350442

P09240M 1/-/-/1

19 28 044 001

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box






8 595025 321220

P09225 1/-/-/1

19 28 042 500

- length: 40 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box






8 592920 025055

P09240 1/-/-/1

19 28 044 000

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box






8 595025 321237

P09250 1/-/-/1

19 28 045 000

- length: 20 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 10 A max./2 300 W
- children protection: no
- packaging: 1 pc, box






8 595025 345844

P09220 1/-/-/1

19 28 142 000

- length: 15 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4 A max./920 W

- max. unreeled load: 10 A max./2 300 W
- children protection: no
- packaging: 1 pc, box







8 595025 368218

P19515 1/-/-/2

19 28 141 500

- length: 10 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4 A max./920 W

- max. unreeled load: 10 A max./2 300 W
- children protection: no
- packaging: 1 pc, box







8 595025 368232

P19510 1/-/-/6

19 28 141 000

Sockets, plugs, adaptors, timers, others

Holders

- extension cable holder, allows fixing to a wall
- in version for 3–4 or 5–6 sockets
- from thin white plastic that visually blends into the wall

P0003C 1/5/20/80

19 04 030 000

8 595025 310002



product: holder for sockets of extension leads, for 3 and 4 sockets ▪ children protection: no ▪ material: plastic ▪ packaging: 1 pc, hanging

P0004C 1/-/20/80

19 04 040 000

8 592920 064672



product: holder for sockets of extension leads, for 5 and 6 sockets ▪ children protection: no ▪ material: plastic ▪ packaging: 1 pc, hanging

Sockets, plugs, adaptors, timers, others

Plugs, sockets

Sockets GoSmart

EMOS GoSmart

- remote switching on and off of connected appliances
- overview of electricity consumption of connected devices
- creation of schedules and setting automatic ON/OFF
- setting delayed switch-off of appliances
- connection to the network via WiFi or Bluetooth protocols
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store Google Play

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app

ZigBee 3.0 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving





8 592920 131817

P5534 1/-/-/30

19 36 553 400

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app

ZigBee 3.0 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving





8 592920 131770

P5533 1/-/-/32

19 36 553 300

- product: Wi-Fi timer/wattmeter-outside
- maximum load: 3 680 W
- voltage/current: 230 V~/16 (5) A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app

Wi Fi | IP44 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving





8 592920 122495

P5532 1/-/-/30

19 36 055 320

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: Wi-Fi socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 (5) A max.
- transmission frequency: 2.4 GHz WIFI
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 120071

P5531 1/-/-/32

19 36 055 310

- product: Wi-Fi socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 (5) A max.
- transmission frequency: 2.4 GHz WIFI
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 120095

P5551 1/-/-/32

19 16 055 510

- product: Wi-Fi timer/wattmeter-outside
- maximum load: 3 680 W
- voltage/current: 230 V~/16 (5) A max.
- transmission frequency: 2.4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | IP44 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 122501

P5552 1/-/-/30

19 16 055 520

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2.4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 131756

P5553 1/-/-/32

19 16 555 300

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2.4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | IP44 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 131794

P5554 1/-/-/30

19 16 555 400

Plugs, sockets

- accessories for manufacturing extension cables
- available in various protection variants
- maximum current load 16 A
- straight and slim angled plugs – allow furniture to be placed close
- selected models feature a hanging loop

P0047 1/5/-/200

19 26 010 100

8 595025 391865

16 A IP20



product: socket for the flexible cord – straight ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0066 1/10/-/100

19 06 100 090

8 592920 038284

16 A IP20



product: ultra thin fork for the flexible cord, angular ▪ type: FRENCH/GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0039 1/10/-/280

19 06 100 050

8 595025 391834

16 A IP20



product: plug for the flexible cord, angular ▪ type: FRENCH/GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0038 1/5/-/200

19 06 110 300

8 595025 391841

16 A IP20



product: plug for the flexible cord, straight ▪ type: FRENCH/GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0034 1/5/-/150

19 06 110 200

8 595025 363862

16 A IP20



product: plug for the flexible cord, straight ▪ type: FRENCH/GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0049 1/5/30/60

19 26 010 200

8 592920 000397

16 A IP44



product: the gum socket for the flexible cord ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP44 ▪ material: rubber ▪ packaging: 1 pc, hanging

P0035 1/5/-/140

19 06 100 020

8 595025 372604

16 A IP20



product: plug for the flexible cord ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0050 1/5/20/80

19 06 100 060

8 592920 000366

16 A IP44



product: the gum fork for the flexible cord ▪ type: FRENCH/GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP44 ▪ material: rubber ▪ packaging: 1 pc, hanging

P0044 1/5/-/60

19 06 010 300

8 595025 387486

16 A IP65



product: the gum socket for the flexible cord ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP65 ▪ material: rubber ▪ packaging: 1 pc, hanging

P0037 1/5/-/50

19 06 100 040

8 595025 387462

16 A IP65



product: the gum fork for the flexible cord ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP65 ▪ material: rubber ▪ packaging: 1 pc, hanging

P0042 1/5/-/150

19 06 010 100

8 595025 363855

16 A IP20



product: socket for the flexible cord – straight ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0045 1/5/-/200

19 06 010 400

8 595025 391827

16 A IP20



product: socket for the flexible cord – straight ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

Sockets, plugs, adaptors, timers, others

Adaptors

- adapters with one or more outlets, equipped with child safety shutters
- enable connecting multiple devices into one socket
- max. load 3 680 W
- for connecting devices with round or flat plugs
- with or without switch

P0078 1/-/6/36

19 05 120 050

8 592920 151235

16 A IP20



product: adapter plug 2×+1×USB-A+1×USB-C 5 V DC 3,4 A max. 17 W ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0077PD 1/-/6/36

19 25 020 001

8 592920 144879

16 A IP20



product: adapter plug 2× + 1× USB-A (QC 20 W) + 1× USB-C (PD 20 W) ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0076PD 1/-/6/36

19 05 020 030

8 592920 144848

16 A | IP20



product: adapter plug 2× + 1× USB-A (QC 20 W) + 1× USB-C (PD 20 W) ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0075 1/-/6/72

19 25 010 000

8 592920 144787

16 A | IP20



product: adapter plug 1× + 1× USB-A 5 V DC/2,4 A/ 12 W + 1× USB-C 5 V DC/ 3 A/ 15 W, Total A+C: 3 A/ 15 W max. ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0074 1/-/6/72

19 05 010 005

8 592920 144817

16 A | IP20



product: adapter plug 1× + 1× USB-A 5 V DC/2,4 A/ 12 W + 1× USB-C 5 V DC/ 3 A/ 15 W, Total A+C: 3 A/ 15 W max. ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0073 1/-/5/30

19 05 120 040

8 592920 140000

16 A | IP20



product: adapter plug 2×+1×USB-A+1×USB-C 5 V DC 3,4 A max. 17 W ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0063 1/5/-/30

19 05 120 010

8 592920 036907

16 A | IP20



product: adapter plug 2× with switch ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0062 1/5/-/30

19 05 120 000

8 592920 036877

16 A | IP20



product: adapter plug 2× with switch ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0040 1/5/-/40

19 05 040 001

8 592920 076309

10 A | IP20



product: adapter plug 4× ▪ type: FRENCH ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ number of positions: 2P + PE ▪ packaging: 1 pc, hanging

P0072 1/-/6/36

19 05 010 003

SALE

8 592920 078211

16 A | 2× USB ⌶ 2.1 A max.



product: USB socket ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0030 1/5/70/140

19 05 030 050

8 592920 008010

10 A | IP20



product: adapter plug 3× ▪ type: FRENCH ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P00292 1/-/4/40

19 25 030 090

8 592920 078242

16 A | IP44



product: socket with switch ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP44 ▪ material: plastic ▪ packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P0029 1/5/-/80

19 05 130 000

8 595025 390370

10 A IP20



product: adapter plug 3× with switch ▪ type: FRENCH ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0028N 1/5/40/80

19 05 020 020

8 592920 120804

16 A IP20



product: adapter plug 2× ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P00282 1/5/-/80

19 25 030 060

8 595025 390882

16 A IP20



product: adapter plug 3× with switch ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P00272 1/4/-/60

19 25 030 050

8 595025 390851

16 A IP20



product: adapter plug 3× ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P00271 1/-/4/40

19 05 110 002

8 592920 078310

16 A IP44



product: socket with switch IP44 ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP44 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0027 1/5/80/160

19 05 110 000

8 595025 390356

10 A IP20



product: socket with switch ▪ type: FRENCH ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0026S 1/5/45/90

19 05 130 003

8 592920 111628

10 A IP20



product: adapter plug 3× with switch ▪ type: FRENCH ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P00262 1/5/80/160

19 25 030 040

8 595025 390820

10 A IP20



product: socket with switch ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0026 1/5/45/90

19 05 030 040

8 595025 379061

10 A IP20



product: adapter plug 3× ▪ type: FRENCH ▪ voltage/current: 250 V~/ 16 A max. ▪ maximum load: 3 500 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0025 1/4/-/200

19 05 030 030

8 595025 372574

10 A IP20



product: adapter plug 3× ▪ type: FRENCH ▪ voltage/current: 250 V~/10 A max. ▪ maximum load: 2 300 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

P0024N 1/5/-/80

19 05 030 023

8 592920 117972

16 A | IP20



product: adapter plug 3× ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0024FR 1/-/10/80

19 05 030 080

8 592920 137987

16 A | IP20



product: adapter plug 3× ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P00242 1/4/-/200

19 25 030 020

8 595025 325013

10 A | IP20



product: adapter plug 3× ▪ type: GERMAN ▪ voltage/current: 250 V~/10 A max. ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P0023N 1/5/-/60

19 05 030 070

8 592920 124550

16 A | IP20



product: adapter plug 3× ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

P00252N 1/5/40/80

19 25 020 000

8 592920 120842



product: adapter plug 2× ▪ type: GERMAN ▪ voltage/current: 250 V~/16 A max. ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: 1 pc, hanging

Travel adaptors

- travel aid for connecting to FRENCH and GERMAN sockets
- can be used in more than 150 world countries
- also with adapter w/ GERMAN socket (used in DE, HU, SI etc.)
- max. current load of 10 or 16 A

P0056N 1/-/-/20

19 10 000 900

8 592920 120897



designed for: for Europeans travelling abroad ▪ using: America, Asia, Australia, New Zealand, China, Africa, Middle East, GB, Switzerland, Italy, HK, India etc. ▪ packaging: 1 pc, small box

P0055E 1/-/10/50

19 10 001 000

NEW

8 592920 158838



designed for: for foreigners arriving in Europe and having a different plug type than GERMAN or FRENCH ▪ using: plugs (USA, GB, JP, CN, AU etc.) into the SCHUKO (DE, HU, SI etc.) or FRENCH (CZ, SK, PL) systems ▪ packaging: 1 pc, small box

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P0055U 1/-/10/20

19 10 001 100

NEW





designed for: for foreigners arriving in Europe and having a different plug type than GERMAN or FRENCH ▪ using: plugs (USA, GB, JP, CN, AU etc.) into the SCHUKO (DE, HU, SI etc.) or FRENCH (CZ, SK, PL) systems ▪ packaging: 1 pc, small box

P0056U 1/-/5/20

19 10 001 200

NEW





designed for: for Europeans travelling abroad ▪ using: America, Asia, Australia, New Zealand, China, Great Britain, Hong Kong, India, etc. ▪ packaging: 1 pc, small box

Timers

- socket with timer automatically turns appliance on/off
- ideal for aquariums, terrariums, pool pumps and lighting
- practical digital timers sockets
- with many available programs, you can plan your entire week
- can handle a max. load of 3 680 W

type: digital ▪ design: GERMAN ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 1 minute ▪ option of manual switch-on ▪ number of programs: 8 ▪ number of switching per day: 8 ▪ function to change summer/winter time ▪ IP rating: IP20 ▪ packaging: 1 pc, box









P5521N 1/-/4/16

19 27 110 012

type: mechanical ▪ design: GERMAN ▪ outdoor using ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 30 minutes ▪ number of switching per day: 48 ▪ IP rating: IP44 ▪ packaging: 1 pc, box









P5526N 1/-/4/16

19 27 110 033

product: remote-controlled sockets, 2 sockets + 1× remote control ▪ type: FRENCH ▪ voltage/current: 250 V~/13 A max. ▪ maximum load: 3 000 W ▪ children protection ▪ IP rating: IP44 ▪ material: plastic ▪ number of positions: 2P + PE ▪ remote control: power supply 1× 3 V CR2032 (included) ▪ packaging: 1 pc, small box









P0067 1/-/-/18

19 05 110 001

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

product: remote-controlled sockets, 2 sockets + 1× remote control ▪ type: GERMAN ▪ voltage/current: 250 V~/13 A max. ▪ maximum load: 3 000 W ▪ children protection ▪ IP rating: IP44 ▪ material: plastic ▪ remote control: power supply 1× 3 V CR2032 (included) ▪ packaging: 1 pc, small box





3 000 W max. | IP44 | 433.92 MHz | 2×

Energy saving

8 592920 073001

P0068
19 05 111 001

1/-/-/18

---

product: remote-controlled sockets, 3 sockets + 1× remote control ▪ type: FRENCH ▪ voltage/current: 230 V~/4.35 A max. ▪ maximum load: 1 000 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ number of positions: 2P + PE ▪ remote control: power supply 1× 3 V CR2032 (included) ▪ packaging: 1 pc, small box





1 000 W max. | IP20 | 433.92 MHz | 3×

Energy saving

8 592920 076217

P0070
19 05 120 004

1/-/3/18

---

product: remote-controlled sockets, 3 sockets + 1× remote control ▪ type: GERMAN ▪ voltage/current: 230 V~/4.35 A max. ▪ maximum load: 1 000 W ▪ children protection ▪ IP rating: IP20 ▪ material: plastic ▪ number of positions: 2P + PE ▪ remote control: power supply 1× 3 V CR2032 (included) ▪ packaging: 1 pc, small box





1 000 W max. | IP20 | 433.92 MHz | 3×

Energy saving

8 592920 076163

P0069
19 05 120 030

1/-/3/18

---

type: mechanical ▪ design: FRENCH ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 30 minutes ▪ switching: phase conductor ▪ number of switching per day: 48 ▪ IP rating: IP44 ▪ packaging: 1 pc, box





3 680 W max. | IP44 | 1×

Energy saving

8 592920 117941

P5508N
19 07 010 054

1/-/4/16

---

type: mechanical ▪ design: GERMAN ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 15 minutes ▪ option of manual switch-on ▪ number of switching per day: 96 ▪ IP rating: IP20 ▪ packaging: 1 pc, box





3 680 W max. | IP20 | 1×

Energy saving

8 595025 324771

P5522
19 27 010 010

1/-/4/16

EMOS A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

type: mechanical ▪ design: GERMAN ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 30 minutes ▪ option of manual switch-on ▪ number of switching per day: 48 ▪ IP rating: IP20 ▪ packaging: 1 pc, box





3 680 W max. | IP20 | 1×

Energy saving

8 592920 117859

P5523N 1/-/4/16

19 27 010 023

type: digital ▪ design: GERMAN ▪ outdoor using ▪ voltage/current: 230 V~/16(2) A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 1 minute ▪ option of manual switch-on ▪ number of programs: 10 ▪ number of switching per day: 10 ▪ function to change summer/winter time ▪ IP rating: IP44 ▪ packaging: 1 pc, box





3 680 W max. | IP44 | 1×

Energy saving

8 592920 134818

P5525N 1/-/4/12

19 27 110 034

type: mechanical ▪ design: FRENCH ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 15 minutes ▪ switching: phase conductor ▪ number of switching per day: 96 ▪ IP rating: IP20 ▪ packaging: 1 pc, box





3 680 W max. | IP20 | 1×

Energy saving

8 595025 319739

P5502 1/-/4/16

19 07 010 010

type: mechanical ▪ design: FRENCH ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 15 minutes ▪ switching: phase conductor ▪ number of switching per day: 96 ▪ IP rating: IP20 ▪ packaging: 1 pc, box





3 680 W max. | IP20 | 1×

Energy saving

8 595025 319753

P5503 1/-/4/16

19 07 010 020

type: mechanical ▪ design: FRENCH ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 30 minutes ▪ switching: zero conductor ▪ number of switching per day: 48 ▪ IP rating: IP20 ▪ packaging: 1 pc, box





3 680 W max. | IP20 | 1×

Energy saving

8 595025 388254

P5504 1/-/4/16

19 07 010 030

type: digital ▪ design: FRENCH ▪ voltage/current: 230 V~/16 A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 1 minute ▪ switching: phase conductor ▪ number of programs: 8 ▪ number of switching per day: 8 ▪ function to change summer/winter time ▪ IP rating: IP20 ▪ packaging: 1 pc, box





3 680 W max. | IP20 | 1×

Energy saving

8 595025 319746

P5501 1/-/4/16

19 07 110 010

type: digital ▪ design: FRENCH ▪ voltage/current: 230 V~/8.7 A max. ▪ maximum load: 2 000 W ▪ minimal time setting: 1 minute ▪ switching: zero conductor ▪ number of programs: 20 ▪ number of switching per day: 20 ▪ function to change summer/winter time ▪ countdown function ▪ IP rating: IP20 ▪ packaging: 1 pc, box





2 000 W max. | IP20 | 1×

Energy saving

8 595025 392282

P5506 1/-/4/16

19 07 110 020

type: digital ▪ design: FRENCH ▪ voltage/current: 230 V~/16(2) A max. ▪ maximum load: 3 680 W ▪ minimal time setting: 1 minute ▪ switching: phase conductor ▪ number of programs: 10 ▪ number of switching per day: 10 ▪ function to change summer/winter time ▪ IP rating: IP44 ▪ packaging: 1 pc, box





3 680 W max. | IP44 | 1×

Energy saving

8 592920 134849

P5507N 1/-/4/12

19 07 110 040

Energy consumption meters

- socket-powered wattmeter to measure appliance's consumption
- helps reduce expenses for electricity
- max. load 3 680 W
- displays: voltage, current, active power and power factor
- also fitted with child covers

maximum load: 3 680 W ▪ voltage/current: 230 V~/16 A max. ▪ measuring range: 2 W–3 680 W ▪ range of power consumption: 0 kWh–9 999 kWh ▪ dimensions: 150 × 75 × 75 mm ▪ packaging: 1 pc, box





16 A 3 680 W max. | IP20

Energy saving

8 592920 113233

P5822 1/2/-/16

19 31 000 020

maximum load: 3 680 W ▪ voltage/current: 230 V~/16 A max. ▪ measuring range: 2 W–3680 W ▪ range of power consumption: 0 kWh–9 999 kWh ▪ dimensions: 148 × 75 × 75 mm ▪ packaging: 1 pc, box





16 A 3 680 W max. | Overload signalization | CO_2 Reduce emissions | Graphic output | Energy saving

8 592920 113226

P5805 1/2/-/16

19 11 000 050

Industrial plugs, 380 V sockets

- wall-mounted industrial plugs and sockets
- with max. current load of 16 or 32 A
- body made of plastic, screw terminals or screw-free design
- 3 phases, voltage 380–415 V, 4–5 poles

A6210 1/-/10/40

31 06 213 240

8 001636 231440



- product: wall socket
- type: screw clamps
- voltage/current: 380–415 V~/16 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6212 1/-/-/10

31 06 213 242

8 001636 231563



- product: wall socket
- type: screw clamps
- voltage/current: 380–415 V~/32 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6211 1/-/10/40

31 06 213 241

8 001636 231457



- product: wall socket
- type: screw clamps
- voltage/current: 380–415 V~/16 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6213 1/-/-/10

31 06 213 243

8 001636 231570



- product: wall socket
- type: screw clamps
- voltage/current: 380–415 V~/32 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6310 1/-/10/50

31 06 213 150

8 001636 222806



- product: coupler
- type: screw clamps
- voltage/current: 380–415 V~/16 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6312 1/-/10/40

31 06 213 152

8 001636 222868



- product: coupler
- type: screw clamps
- voltage/current: 380–415 V~/32 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6311 1/-/10/50

31 06 213 151





- product: coupler
- type: screw clamps
- voltage/current: 380–415 V~/16 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6313 1/-/10/40

31 06 213 153





- product: coupler
- type: screw clamps
- voltage/current: 380–415 V~/32 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6110 1/-/10/50

31 05 213 050





- product: separate plug
- voltage/current: 380–415 V~/16 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6114 1/-/10/40

31 05 213 054





- product: separate plug
- type: screw clamps
- voltage/current: 380–415 V~/32 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6111 1/-/10/50

31 05 213 051





- product: separate plug
- voltage/current: 380–415 V~/16 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6115 1/-/10/40

31 05 213 055





- product: separate plug
- type: screw clamps
- voltage/current: 380–415 V~/32 A
- children protection: no
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

Flexo, assembled cords

Rubber

Two-cores

- rubber two-strand mobile cord with fixed-mount plug
- length 3 or 5 m, various cross sections, black

S03030 1/5/-/20

24 21 130 212

8 595025 348838

H05RR-F 1.0 mm² | 3 m



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03050 1/5/-/20

24 21 150 212

8 595025 348845

H05RR-F 1.0 mm² | 5 m



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03330 1/5/-/20

24 21 230 230

8 595025 382757

H05RR-F 1.5 mm² | 3 m



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.5 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03350 1/5/-/20

24 21 250 230

8 595025 382764

H05RR-F 1.5 mm² | 5 m



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.5 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03030N 1/5/-/20

24 21 130 213

8 592920 130865

H05RN-F2 1.0 mm² | 3 m



- conductor: H05RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03031N 1/5/-/20

24 21 130 214

8 592920 130926

H07RN-F2 1 mm² | 3 m



- conductor: H07RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

S03050N 1/5/-/20

24 21 150 213



- conductor: H05RN-F
- length: 5 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

Three-cores

- rubber three-strand mobile cord with fixed-mount plug
- length 3 or 5 m, various cross sections, black

S03130 1/-/5/15

24 25 130 220



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03150 1/5/-/15

24 25 150 220



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03230 1/-/5/25

24 25 230 220



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03250 1/5/-/10

24 25 250 220



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03430 1/-/5/10

24 25 430 230



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 2.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03450 1/-/5/10

24 25 450 230



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 2.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

S00003 1/5/-/30

24 35 724 032

8 595025 323132

H05RR-F 0.75 mm² | 2.4 m



- conductor: H05RR-F
- length: 2.4 m
- type of insulation: braided/rubber
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR1-H05RR-F
- packaging: 1 pc, hanging

S03130N 1/-/5/15

24 25 130 210

8 592920 130957

H05RN-F3G 1.0 mm² | 3 m



- conductor: H05RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03150N 1/5/-/15

24 25 150 210

8 592920 130988

H05RN-F3G 1.0 mm² | 5 m



- conductor: H05RN-F
- length: 5 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03210N 1/-/-/6

24 25 210 210

8 592920 131077

H07RN-F3G 1.5 mm² | 10 m



- conductor: H07RN-F
- length: 10 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03230N 1/-/5/15

24 25 230 210

8 592920 131015

H07RN-F3G 1.5 mm² | 3 m



- conductor: H07RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03250N 1/5/-/10

24 25 250 210

8 592920 131046

H07RN-F3G 1.5 mm² | 5 m



- conductor: H07RN-F
- length: 5 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

Flexo, assembled cords

PVC

Two-cores

- PVC two-strand mobile cord with fixed-mount plug
- black or white
- length 2, 3 or 5 m, various cross sections
- selected models fitted with switch

S12252 1/5/30/60

24 01 520 132

8 595025 314307

H03VVH2-F 0.5 mm² | 2 m



- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.5 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S15272 1/5/35/70

24 01 720 132

8 595025 314406

H03VVH2-F 0.75 mm² | 2 m



- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S15273 1/5/30/60

24 01 730 132

8 595025 314413

H03VVH2-F 0.75 mm² | 3 m



- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S15275 1/5/-/30

24 01 750 132

8 595025 314420

H03VVH2-F 0.75 mm² | 5 m



- conductor: H03VVH2-F
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S19272 1/5/35/70

24 01 720 232

8 595025 318619

H03VVH2-F 0.75 mm² | 2 m



- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S19273 1/5/30/60

24 01 730 232

8 595025 318626

H03VVH2-F 0.75 mm² | 3 m



- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

S19275 1/5/-/30

24 01 750 232

8 595025 318633 | H03VVH2-F 0.75 mm² | 5 m



- conductor: H03VVH2-F
- length: 5 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S08272 1/5/30/60

24 02 720 132

8 595025 321282 | H03VVH2-F 0.75 mm² | 2 m



- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S08273 1/5/25/50

24 02 730 132

8 595025 321299 | H03VVH2-F 0.75 mm² | 3 m



- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S09272 1/5/25/50

24 02 720 232

8 595025 321329 | H03VVH2-F 0.75 mm² | 2 m



- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S09273 1/5/25/50

24 02 730 232

8 595025 321336 | H03VVH2-F 0.75 mm² | 3 m



- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S1111 1/5/35/70

24 00 517 252

8 595025 308764 | H03VVH2-F 0.5 mm² | 1.75 m



- conductor: H03VVH2-F
- length: 1.75 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.5 mm²
- type: KF-Y11-1
- packaging: 1 pc, hanging

Three-cores

- PVC three-strand mobile cord with fixed-mount plug
- black or white
- length 2, 3 or 5 m, various cross sections

S14372 1/5/-/40

24 13 720 132

8 595025 314376 | H05VV-F3G 0.75 mm² | 2 m



- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14373 1/5/-/30

24 13 730 132

8 595025 314383 | H05VV-F3G 0.75 mm² | 3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14375 1/5/-/25

24 13 750 132



8 595025 314390 | H05VV-F3G 0.75 mm² | 5 m

- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14312 1/5/-/35

24 13 120 132



8 595025 314314 | H05VV-F3G 1.0 mm² | 2 m

- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14313 1/5/-/30

24 13 130 132



8 595025 314321 | H05VV-F3G 1.0 mm² | 3 m

- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14315 1/5/-/20

24 13 150 132



8 595025 314338 | H05VV-F3G 1.0 mm² | 5 m

- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14322 1/5/-/35

24 13 220 132



8 595025 314345 | H05VV-F3G 1.5 mm² | 2 m

- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14323 1/5/-/30

24 13 230 132



8 595025 314352 | H05VV-F3G 1.5 mm² | 3 m

- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14325 1/5/-/20

24 13 250 132



8 595025 314369 | H05VV-F3G 1.5 mm² | 5 m

- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18372 1/5/-/40

24 13 720 232



8 595025 318640 | H05VV-F3G 0.75 mm² | 2 m

- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18373 1/5/-/35

24 13 730 232



8 595025 318657 | H05VV-F3G 0.75 mm² | 3 m

- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18312 1/5/-/40

24 13 120 232



8 595025 318671 | H05VV-F3G 1.0 mm² | 2 m

- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

S18313 1/5/-/35

24 13 130 232

8 595025 318688

H05VV-F3G 1.0 mm² | 3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18315 1/5/-/20

24 13 150 232

8 595025 318695

H05VV-F3G 1.0 mm² | 5 m



- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18322 1/5/-/35

24 13 220 232

8 595025 318701

H05VV-F3G 1.5 mm² | 2 m



- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18323 1/5/-/30

24 13 230 232

8 595025 318718

H05VV-F3G 1.5 mm² | 3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18325 1/5/-/20

24 13 250 232

8 595025 318725

H05VV-F3G 1.5 mm² | 5 m



- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging


Cables

Reliable connections for everyday and professional use

Cables represent a stable and consistently popular product range across the consumer electronics, IT accessories and installation technology sectors.

Selected models support fast charging and high-speed data transfer, and meet current technical standards for safe and reliable operation. Emphasis is placed on high-quality workmanship, durability and a long service life, even with frequent use.

The portfolio includes a wide range of power, data and extension cables in various lengths, connector types and power specifications.

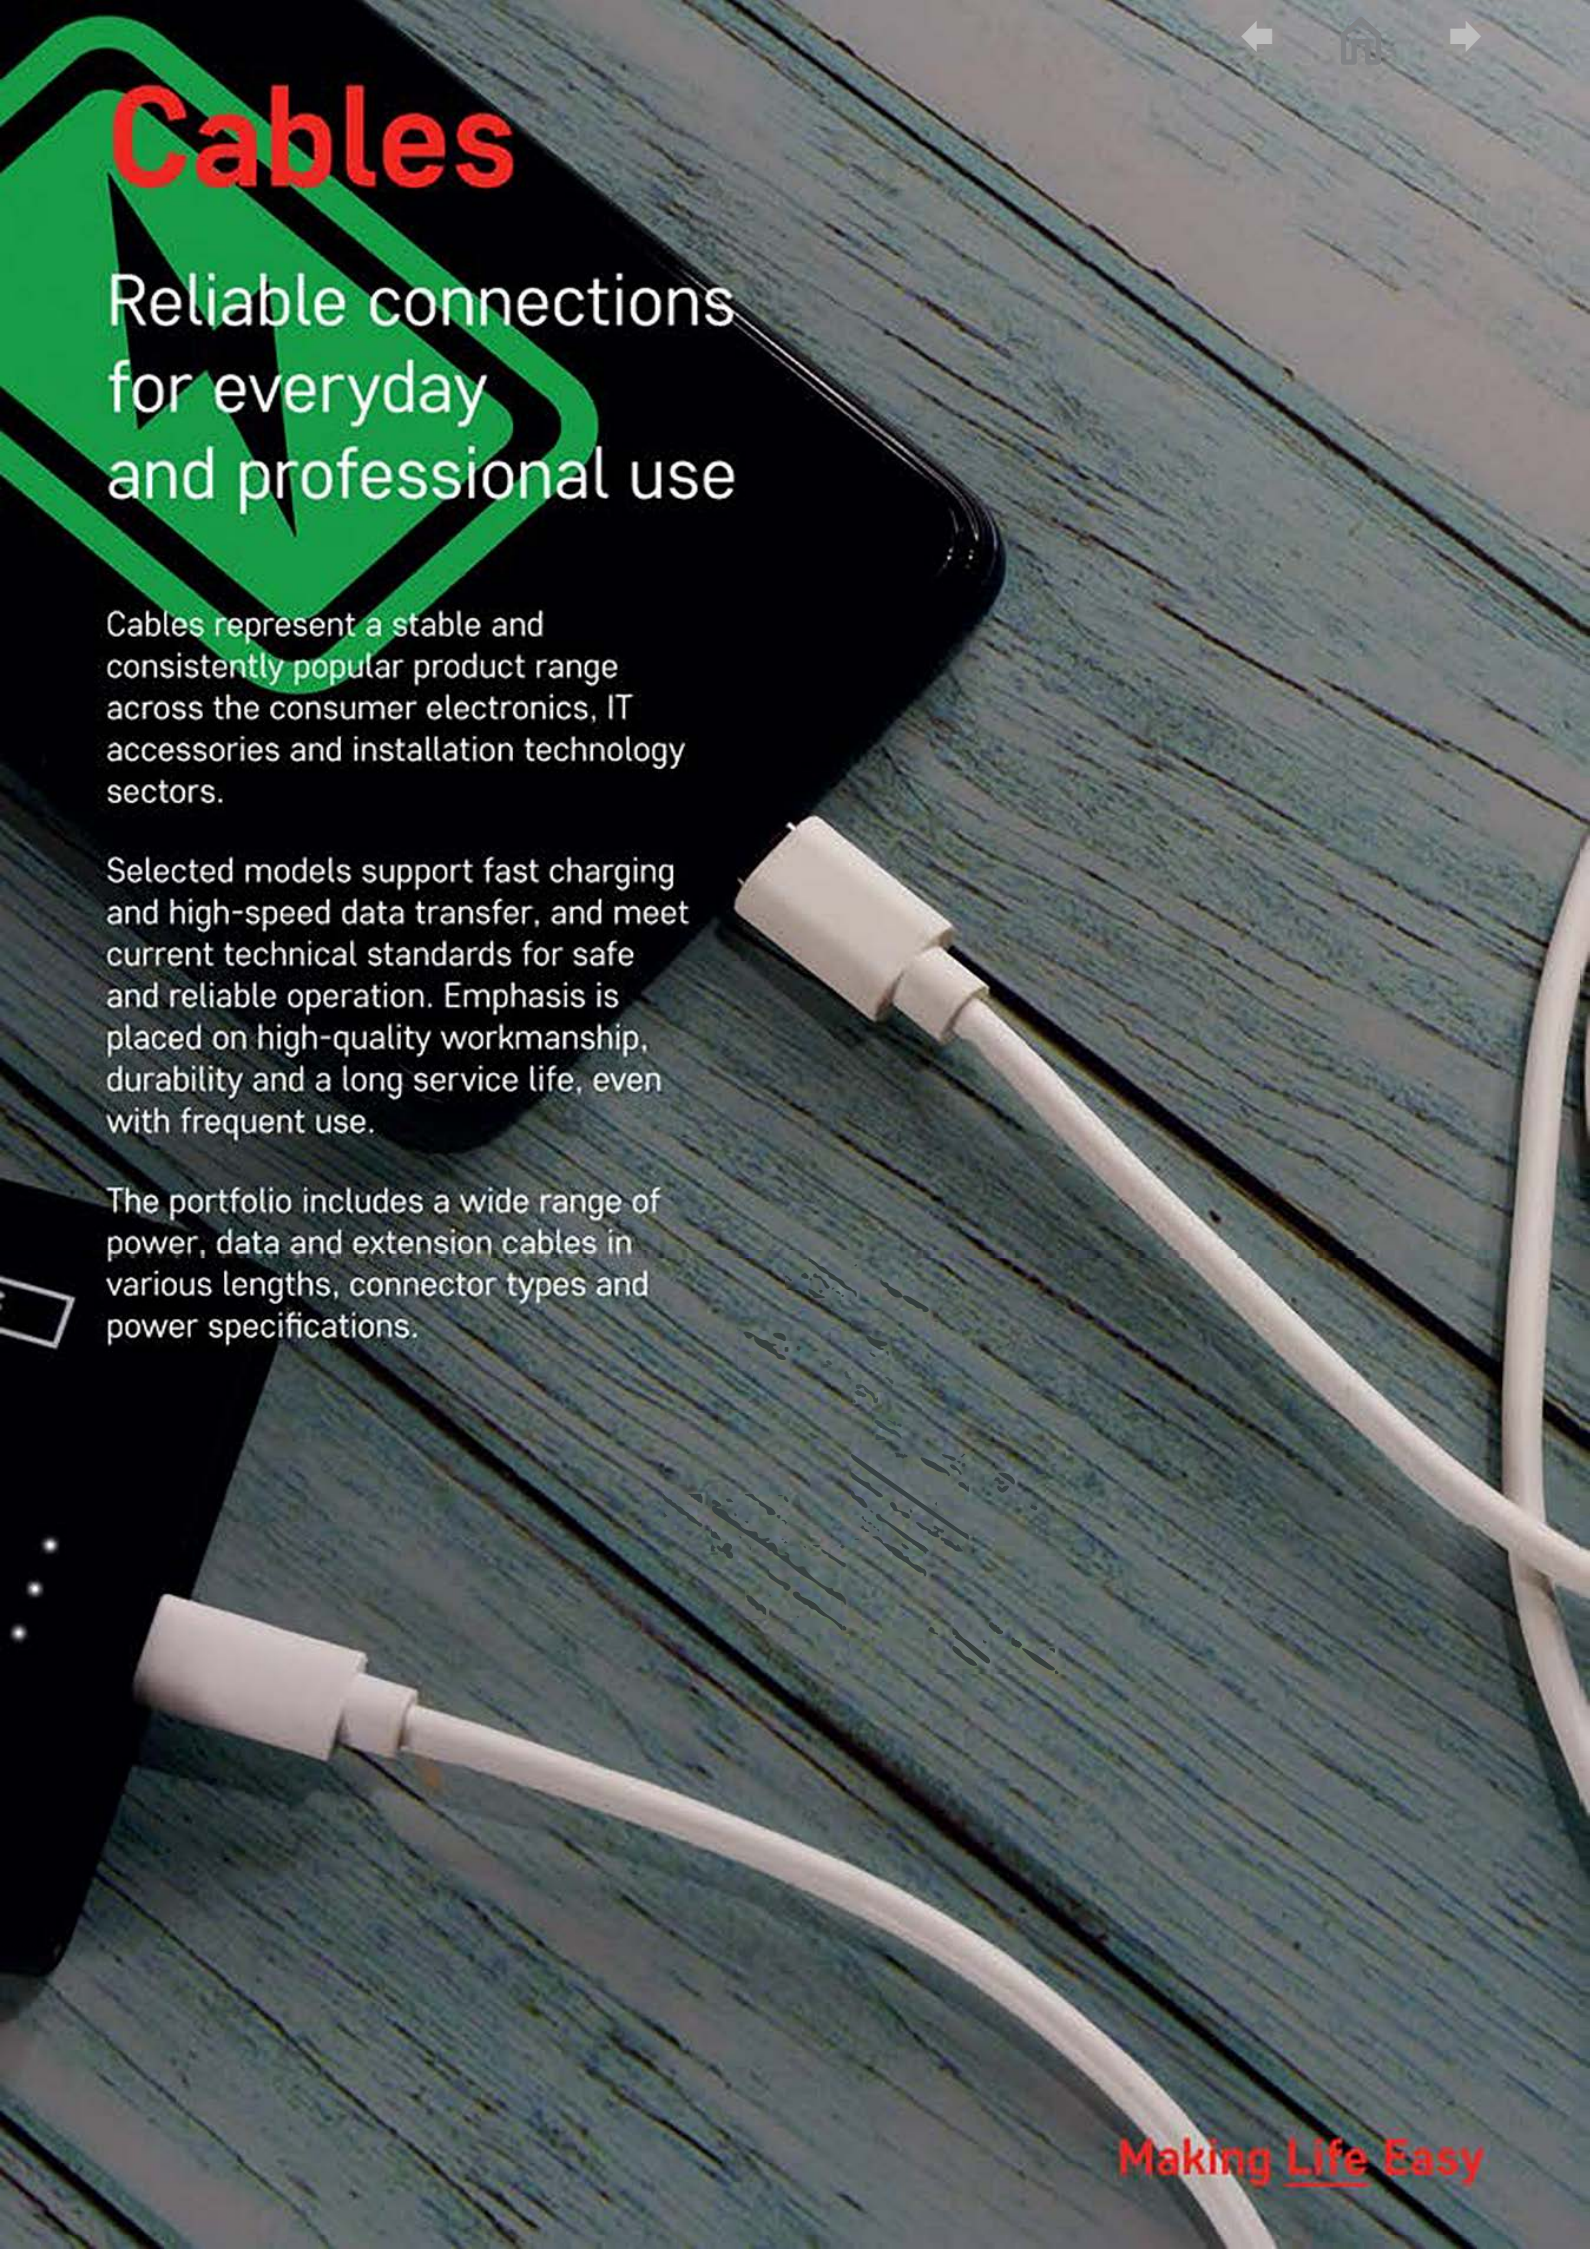

Cables



Data cables UTP, FTP

Data cables CAT 5E

- EMOS structured cabling components of top-class quality
- ensure high performance, reliable operation and long service life
- suitable for both home and business installations
- reliable data transmission

type: UTP CAT 5E CCA OEM ▪ cable structure: wire ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5.0 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, foil



CCA | CAT 5E | PVC | ↔ 100 m

8 592920 146194

S9137 100/-/-/400

23 09 010 150

type: UTP CAT 5E BASIC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5.0 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, foil



Cu | CAT 5E | PVC | ↔ 100 m

8 592920 146170

S9136 100/-/-/400

23 09 010 140

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

type: UTP CAT 5E PVC BASIC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5.0 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, paper box





Cu | CAT 5E | PVC | ↔ 100 m

8 592920 145708

S9135 100/-/-/200

23 09 010 130

type: UTP CAT 5E PVC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, paper box





Cu | CAT 5E | PVC | ↔ 100 m | 25 YEARS

8 592920 141403

S9141 100/-/-/200

23 09 210 010

type: UTP CAT 5E PVC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5.2 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 5E | PVC | ↔ 305 m | 25 YEARS

8 595025 319302

S9121 305/-/-/305

23 09 010 010

type: UTP CAT 5E PE ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ cable sheath: PE ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, paper box





Cu | CAT 5E | PE | ↔ 100 m | WEATHER PROOF | 25 YEARS

8 592920 141410

S9142 100/-/-/200

23 09 210 020

type: UTP CAT 5E PE ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ cable sheath: PE ▪ jacket diameter: 5–6 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 5E | PE | ↔ 305 m | WEATHER PROOF | 25 YEARS

8 592920 141427

S9143 305/-/-/305

23 09 210 030

type: FTP CAT 5E PVC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, paper box





Cu | CAT 5E | PVC | ↔ 100 m | 25 YEARS

8 592920 141373

S9223
23 09 110 030

100/-/-/200

type: FTP CAT 5E PVC ▪ cable structure: wire ▪ shielding: Al/PET 7/12–18 mm ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 6.0 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 5E | PVC | ↔ 305 m | 25 YEARS

8 595025 319319

S9221
23 09 110 010

305/-/-/305

type: FTP CAT 5E LSZH ▪ cable structure: wire ▪ shielding: Al/PET 7/12–18 mm ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: LSZH ▪ jacket diameter: 6.0 mm ▪ low smoke zero halogen (LSZH) coat ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Dca–s2–d2–a1 ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 5E | LSZH | ↔ 305 m | 25 YEARS

8 592920 000083

S9222
23 09 110 020

305/-/-/305

type: FTP CAT 5E PE ▪ cable structure: wire ▪ shielding ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ cable sheath: PE ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, paper box





Cu | CAT 5E | PE | ↔ 100 m | WEATHER PROOF | 25 YEARS

8 592920 141380

S9224
23 09 110 040

100/-/-/200

type: FTP CAT 5E PE ▪ cable structure: wire ▪ shielding ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ cable sheath: PE ▪ jacket diameter: 5–6 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 5E | PE | ↔ 305 m | WEATHER PROOF | 25 YEARS

8 592920 141397

S9225
23 09 110 050

305/-/-/305

Data cables CAT 6

- EMOS structured cabling components of top-class quality
- ensure high performance, reliable operation and long service life
- suitable for modern network infrastructure and professional installations
- stable transmission even under higher load

---

type: UTP CAT 6 PVC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: 150D nylon + PE cross ▪ cable sheath: PVC ▪ jacket diameter: 6.3 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 6 | PVC | ↔ 305 m | 25 YEARS

8 595025 341426

S9131 305/-/-/305

23 09 020 010

---

type: FTP CAT 6 PVC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 6.0 mm ▪ highest supported protocol: 100 Base-TX ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 6 | PVC | ↔ 305 m | 25 YEARS

8 592920 146217

S9231 305/-/-/305

23 09 010 160

---

type: UTP CAT 6 LSZH ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: 150D nylon + PE cross ▪ cable sheath: LSZH ▪ jacket diameter: 6.3 mm ▪ low smoke zero halogen (LSZH) coat ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Dca–s2–d2–a2 ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | CAT 6 | LSZH | ↔ 305 m | 25 YEARS

8 592920 000069

S9132 305/-/-/305

23 09 020 020

SALE

Patch cables

- for data transmission in computer and telecommunication networks
- terminated with RJ45 connectors (CAT5E or CAT6)
- ideal for households and offices

type: UTP CAT 5E 1M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 1 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | 5 YEARS WARRANTY

8 595025 385482

S9122 1/5/25/100

23 09 010 020

type: UTP CAT 5E 2M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 2 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | 5 YEARS WARRANTY

8 595025 385499

S9123 1/-/-/60

23 09 010 030

type: UTP CAT 5E 3M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 3 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | 5 YEARS WARRANTY

8 595025 385505

S9124 1/-/10/40

23 09 010 040

type: UTP CAT 5E 5M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 5 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | 5 YEARS WARRANTY

8 595025 385512

S9125 1/-/10/20

23 09 010 050

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

type: UTP CAT 5E 10M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 10 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | 5 YEARS WARRANTY

8 595025 385529

S9126
23 09 010 060

1/-/10/30

---

type: UTP CAT 5E 15M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 15 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | 5 YEARS WARRANTY

8 595025 385536

S9127
23 09 010 070

1/-/5/20

---

type: UTP CAT 5E 25M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 25 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | 5 YEARS WARRANTY

8 592920 026830

S9130
23 09 010 100

1/-/-/10

Connectors and accessories for patch cables

Accessories for patch cables

- supplementary range of components for data network construction
- reliable components for terminating data cables

K0101 20/-/-/5,000

18 21 000 100

8 595025 366559



type: connector RJ45 8p8c ▪ category: CAT5E ▪ designed for cable: UTP ▪ using: litz wire ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 22 × 12 × 10 mm ▪ packaging: 20 pcs, PVC packet

K0102 20/-/-/5,000

18 21 000 500

8 592920 009185



type: connector RJ45 8p8c ▪ category: CAT5E ▪ designed for cable: UTP ▪ using: solid wire ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 22 × 12 × 10 mm ▪ packaging: 20 pcs, PVC packet

K0103 20/-/-/5,000

18 21 000 700

8 592920 030165



type: connector RJ45 8p8c ▪ category: CAT6 ▪ designed for cable: UTP ▪ using: solid wire ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 22 × 12 × 10 mm ▪ packaging: 20 pcs, PVC packet

K0201 20/-/-/5,000

18 21 100 100

8 592920 030189



type: connector RJ45 8p8c ▪ category: CAT5E ▪ designed for cable: FTP, SFTP, F/UTP ▪ using: solid wire ▪ shielding ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 22 × 12 × 10 mm ▪ packaging: 20 pcs, PVC packet

K0202 20/-/-/5,000

18 21 100 200

8 592920 030202



type: connector RJ45 8p8c ▪ category: CAT6 ▪ designed for cable: FTP, SFTP, F/UTP ▪ using: solid wire ▪ shielding ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 22 × 12 × 10 mm ▪ packaging: 20 pcs, PVC packet

K0141 20/-/-/5,000

18 21 000 400

8 592920 017333



type: RJ45 connector protection ▪ using: reduces the stress of RJ45 connector ▪ dimensions: 30 × 13 × 11 mm ▪ packaging: 20 pcs, PVC packet

K0151 20/-/-/5,000

18 21 000 600



type: RJ45 connector protection ▪ using: reduces the stress of RJ45 connector ▪ dimensions: 30 × 13 × 11 mm ▪ packaging: 20 pcs, PVC packet

K0301 1/10/-/500

18 21 000 800



type: keystone RJ45 CAT5E ▪ category: CAT5E ▪ designed for cable: UTP ▪ using: solid wire ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 31 × 20 × 15 mm ▪ packaging: 1 pc, PVC packet

K0311 1/10/-/500

18 21 100 300



type: keystone RJ45 CAT5E ▪ category: CAT5E ▪ designed for cable: FTP, SFTP, F/UTP ▪ using: solid wire ▪ shielding ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 31 × 20 × 15 mm ▪ packaging: 1 pc, PVC packet

K0312 1/10/-/500

18 21 100 301



type: keystone RJ45 CAT6 ▪ category: CAT6 ▪ designed for cable: FTP, SFTP, F/UTP ▪ using: solid wire ▪ shielding ▪ min. lifetime: 1 000 connect/disconnect cycles ▪ storage temperature: -40–70 °C ▪ operating temperature: -10–60 °C ▪ maximum operating humidity: 93 % ▪ dimensions: 31 × 20 × 15 mm ▪ packaging: 1 pc, PVC packet

J0401 1/-/25/250

25 12 000 100



type: UTP socket wall mount ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet

Connectors IEC, F, reductions

- wide range of couplers, plugs and sockets
- straight and angled versions
- F connectors in screw-on and push-on types

K1331 10/-/-/2,500

18 04 100 100



- version: plug
- type: direct
- packaging: 10 pcs, packet

K1451 10/-/-/2,500

18 04 100 500



- version: plug
- type: angular
- packaging: 10 pcs, packet

K1421 10/-/-/2,500

18 04 100 300

8 595025 356741



10×

- version: plug
- type: angular
- packaging: 10 pcs, packet

R5060 10/-/-/2,500

18 04 300 100

8 595025 357472



10×

- version: coupling
- type: direct
- packaging: 10 pcs, packet

K7311 10/-/-/4,000

18 07 100 300

8 595025 357311



10×

- version: screw plug
- type: screwing
- for coax: 3C2V
- dimensions: 4.0/4.9 mm
- packaging: 10 pcs, packet

K7321 10/-/-/4,000

18 07 100 400

8 595025 357328



10×

- version: plug
- type: screwing
- for coax: CB-500
- dimensions: 4.0/5.5 mm
- packaging: 10 pcs, packet

K7331 10/-/-/4,000

18 07 100 500

8 595025 357335



10×

- version: plug
- type: screwing
- for coax: CB-100
- dimensions: 5.0/6.5 mm
- packaging: 10 pcs, packet

K7351 10/-/-/4,000

18 07 100 700

8 595025 357359



10×

- version: plug
- type: screwing
- for coax: CB-113N
- dimensions: 5.0/7.0 mm
- packaging: 10 pcs, packet

K1731 10/-/-/2,500

18 04 000 100

8 595025 356796



10×

- version: socket
- type: direct
- packaging: 10 pcs, packet

R5602 10/-/-/4,000

18 07 300 100

8 595025 357502



10×

- version: coupling
- type: screwing
- for coax: any
- packaging: 10 pcs, packet

K1821 10/-/-/2,500

18 04 000 300

8 595025 356826



10×

- version: socket
- type: angular
- packaging: 10 pcs, packet

R5610 10/-/-/2,000

18 07 300 200

8 595025 357519



10×

- version: coupling
- type: screwing
- for coax: any
- packaging: 10 pcs, packet

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

K1851 10/-/-/2,500

18 04 000 500

8 595025 356857



10×

- version: socket
- type: angular
- packaging: 10 pcs, packet

R5639 10/-/-/2,000

18 07 200 100

8 595025 357526



10×

- version: reduction
- type: screwing
- for coax: any
- packaging: 10 pcs, packet

K1731.2 2/-/20/480

18 04 000 600

8 592920 086032



- version: socket
- type: direct
- packaging: 2 pc, paper blister

R5851 10/-/-/2,000

18 07 200 600

8 595025 357588



10×

- version: reduction IEC-F
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

R5852 10/-/-/2,000

18 07 200 700

8 595025 357595



10×

- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

R5553 10/-/-/1,500

18 07 200 300

8 595025 357496



10×

- version: reduction F-BNC
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

R5850 10/-/-/2,000

18 07 200 500

8 595025 357571



10×

- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

K9304 1/150/-/150

18 11 000 200

8 595025 321350



- connectors: SCART – 3× CINCH + SVHS
- switch IN/OUT
- packaging: 1 pc, packet

K1821.2 2/-/20/480

18 04 000 601

8 592920 086049



- version: socket
- type: angular
- packaging: 2 pc, paper blister

K1851.2 2/-/20/480

18 04 000 602

8 592920 086056



- version: socket
- type: angular
- packaging: 2 pc, paper blister

K1331.2 2/-/20/480

18 04 100 701

8 592920 086063



- version: plug
- type: direct
- packaging: 2 pc, paper blister

K1421.2 2/-/20/480

18 04 100 702

8 592920 086070



- version: plug
- type: angular
- packaging: 2 pc, paper blister

K1451.2 2/-/20/480

18 04 100 703

8 592920 086087



- version: plug
- type: angular
- packaging: 2 pc, paper blister

R5060.2 2/-/20/480

18 04 300 200

8 592920 086094



- version: coupling
- type: direct
- packaging: 2 pc, paper blister

K7321.2 2/-/20/480

18 07 100 800

8 592920 086100



- version: plug
- type: screwing
- for coax: CB-500
- dimensions: 4.0/5.5 mm
- packaging: 2 pc, paper blister

K7331.2 2/-/20/480

18 07 100 801

8 592920 086117



- version: plug
- type: screwing
- for coax: CB-100
- dimensions: 5.0/6.5 mm
- packaging: 2 pc, paper blister

K7351.2 2/-/20/480

18 07 100 802

8 592920 086124



- version: plug
- type: screwing
- for coax: CB-113N
- dimensions: 5.0/7.0 mm
- packaging: 2 pc, paper blister

R5850.2 2/-/20/480

18 07 100 803

8 592920 086131



- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 2 pc, paper blister

R5852.2 2/-/20/480

18 07 100 804

8 592920 086148



- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 2 pc, paper blister

R5639.2 2/-/20/480

18 07 201 000

8 592920 086155



- version: reduction
- type: screwing
- for coax: any
- packaging: 2 pc, paper blister

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

R5602.2 2/-/20/480

18 07 300 300





- version: coupling
- type: screwing
- for coax: any
- packaging: 2 pc, paper blister

R5610.2 2/-/20/480

18 07 300 301





- version: coupling
- type: screwing
- for coax: any
- packaging: 2 pc, paper blister

Twin-shielded cables CYH

- reliable signal and voltage transmission
- first-class transmission characteristics
- available in white, black, and transparent

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 105× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel



OFC Cu 2× 0.75 mm² | PVC ø 2.5 mm | 5 YEARS WARRANTY



S8307 100/-/-/400

23 08 207 500

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 140× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel



OFC Cu 2× 1.00 mm² | PVC ø 3.5 mm | 5 YEARS WARRANTY



S8310 100/-/-/400

23 08 210 000

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 210× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel



OFC Cu 2× 1.50 mm² | PVC ø 3.6 mm | 5 YEARS WARRANTY



S8314 100/-/-/200

23 08 215 000

- conductor cross section: 2.5 mm²
- diameter of the inner conductor: 350× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel




OFC Cu 2× 2.50 mm² | PVC ø 4.0 mm | 5 YEARS WARRANTY

8 595025 309976

S8324 100/-/-/200

23 08 225 000

- conductor cross section: 2.5 mm²
- diameter of the inner conductor: 123× 0.16 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil

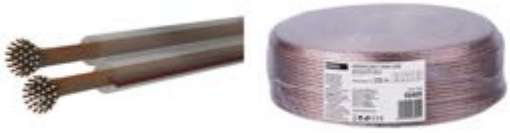

CCA 2× 2.50 mm² | PVC ø 4.3 mm

8 592920 030141

S8405 100/-/-/200

23 08 325 000

- conductor cross section: 0.35 mm²
- diameter of the inner conductor: 30× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel



Cu 2× 0.35 mm² | PVC ø 2.0 mm

8 595025 309167

S8231 100/-/-/400

23 08 203 510

- conductor cross section: 0.5 mm²
- diameter of the inner conductor: 45× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel



Cu 2× 0.50 mm² | PVC ø 2.5 mm

8 595025 309198

S8251 100/-/-/400

23 08 205 010

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 67× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel



Cu 2× 0.75 mm² | PVC ø 2.6 mm

8 595025 309228

S8271 100/-/-/400

23 08 207 510

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 90× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel



8 592920 022399

S8281
23 08 210 010

100/-/-/200

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 133× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel



8 592920 022436

S8291
23 08 215 010

100/-/-/200

- conductor cross section: 0.15 mm²
- diameter of the inner conductor: 14× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 200 m, reel



8 595025 309129

S8130
23 08 201 550

200/-/-/800

- conductor cross section: 0.35 mm²
- diameter of the inner conductor: 30× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel



8 595025 309150

S8230
23 08 203 550

100/-/-/400

- conductor cross section: 0.5 mm²
- diameter of the inner conductor: 45× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel



8 595025 309181

S8250
23 08 205 050

100/-/-/400

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 67× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 0.75 mm² | PVC ø 2.6 mm

8 595025 309211

S8270 100/-/-/400

23 08 207 550

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 90× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 1.00 mm² | PVC ø 3.0 mm

8 592920 022412

S8280 100/-/-/200

23 08 210 050

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 133× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 1.50 mm² | PVC ø 3.5 mm

8 592920 022450

S8290 100/-/-/200

23 08 215 050

- conductor cross section: 0.5 mm²
- diameter of the inner conductor: 45× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





CCA 2× 0.50 mm² | PVC ø 2.3 mm

8 592920 015216

S8253 100/-/400/800

23 08 305 050

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 67× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





CCA 2× 0.75 mm² | PVC ø 2.5 mm

8 592920 015230

S8273 100/-/400/800

23 08 307 550

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 50× 0.16 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





8 592920 015254

S8283 100/-/-/400

23 08 310 050

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 133× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





8 592920 015278

S8293 100/-/-/400

23 08 315 050

Coaxial cables

Coaxial cables 50 Ohm

- coaxial cables for indoor and outdoor use
- high copper purity ensures stability and excellent transmission parameters
- certified by an accredited testing and calibration laboratory

coaxial cable type: RG58/U ▪ intended use: short distribution systems, telecommunication antenna connections ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: stranded wires, copper (Cu) ▪ diameter of the inner conductor: 17× 0.19 mm ▪ dielectric type, diameter: SPE 3.0 mm ▪ number of shieldings: 1 ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 112× 0.12 mm ▪ diameter of cable sheath: 5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum





8 592920 087947

S5213 500/-/-/500


23 05 058 401

Coaxial cables 75 Ohm

- a range of coaxial cables for outdoor and indoor use
- high copper purity ensures stability and excellent transmission parameters
- a wide selection allows use in many applications
- certified by an accredited testing and calibration laboratory

coaxial cable type: CB113 ▪ intended use: terciary distribution CATV, SAT ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel






8 595025 304896

S5261 100/-/-/200

23 05 113 000

coaxial cable type: CB113 ▪ intended use: terciary distribution CATV, SAT ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box






8 595025 304902

S5262 250/-/-/250

23 05 113 002

coaxial cable type: CB113 ▪ intended use: terciary distribution CATV, SAT ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC (HD 624) ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum






8 592920 068236

S5268 500/-/-/500

23 05 113 003

coaxial cable type: CB113 LSZH ▪ intended use: unit connections, resistant to interference, CLASS A+ ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: LSZH ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, paper reel box





8 592920 081976

S5269 250/-/-/250

23 05 113 600

coaxial cable type: CB113UV ▪ intended use: outdoor installation, terciary distribution ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC UV resistant ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel



100 m | 75 Ω | Cu ø 1.13 mm | CuSn 144× ø 0.12 mm | 3× | PVC UV ø 7.05 mm | 5 YEARS WARRANTY

8 595025 326133

S5265 100/-/-/200

23 05 113 500

---

coaxial cable type: CB113UV ▪ intended use: outdoor installation, terciary distribution ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC UV resistant ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box



250 m | 75 Ω | Cu ø 1.13 mm | CuSn 144× ø 0.12 mm | 3× | PVC UV ø 7.05 mm | 5 YEARS WARRANTY

8 595025 326140

S5266 250/-/-/250

23 05 113 502

---

coaxial cable type: CB100F ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.0 mm ▪ dielectric type, diameter: FPE 4.6 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ diameter of cable sheath: 6.5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel



100 m | 75 Ω | Cu ø 1.0 mm | CuSn 48× ø 0.12 mm | 2× | PVC ø 6.5 mm | 5 YEARS WARRANTY

8 595025 309068

S5141 100/-/-/200

23 05 100 200

---

coaxial cable type: CB100F ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.0 mm ▪ dielectric type, diameter: FPE 4.6 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ diameter of cable sheath: 6.5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box



250 m | 75 Ω | Cu ø 1.0 mm | CuSn 48× ø 0.12 mm | 2× | PVC ø 6.5 mm | 5 YEARS WARRANTY

8 595025 313485

S5241S 250/-/-/500

23 05 100 201

---

coaxial cable type: CB500 ▪ intended use: CATV distribution ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.75 mm ▪ dielectric type, diameter: FPE 3.2 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ shielding II. foil: Al/PES ▪ diameter of cable sheath: 5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel



100 m | 75 Ω | Cu ø 0.75 mm | CuSn 48× ø 0.12 mm | 3× | PVC ø 5.0 mm | 5 YEARS WARRANTY


8 595025 304872

S5252 100/-/-/400

23 05 500 000

coaxial cable type: CB500 ▪ intended use: terminals for connected users, CATV distribution ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.75 mm ▪ dielectric type, diameter: FPE 3.2 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box






8 595025 304889

S5253 250/-/-/500

23 05 500 002

coaxial cable type: CB21D ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.1 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PET ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 128× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel





8 592920 018224

S5271 100/-/-/200

23 05 021 000

coaxial cable type: CB21D ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.1 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PET ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 128× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum





8 592920 062272

S5273 500/-/-/500

23 05 021 100

coaxial cable type: CB50F ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.9 mm ▪ dielectric type, diameter: FPE 4.4 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.3 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box






8 595025 313478

S5231S 250/-/-/250

23 05 050 201

coaxial cable type: CB125 ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.00 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: CCA/PES ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 64× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC (HD 624) ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel






8 592920 052754

S5385 100/-/-/200

23 05 120 005

coaxial cable type: CB115/RG6 CU TRISHIELD ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PET ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 96× 0.12 mm ▪ shielding II. foil: Al/PET ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel





8 592920 041000

S5272 100/-/-/200

23 05 023 000

---

coaxial cable type: CB130 ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, PVC foil





8 595025 338228

S5381E 100/-/-/400

23 05 130 010

---

coaxial cable type: CB135 ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 64× 0.12 mm ▪ shielding II. foil: Al/PES ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel





8 595025 384058

S5382 100/-/-/200

23 05 135 000

---

coaxial cable type: CB135 ▪ intended use: unit connections, resistant to interference, CLASS A ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 64× 0.12 mm ▪ shielding II. foil: Al/PES ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum





8 592920 026724

S5383 500/-/-/500

23 05 135 010

---

coaxial cable type: RG59B/U ▪ intended use: CCTV cabling ▪ UV resistant ▪ material of the inner conductor: copper plated steel ▪ diameter of the inner conductor: 0,58 mm ▪ dielectric type, diameter: SPE 3.7 mm ▪ number of shieldings: 1 ▪ shielding I. foil ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 128× 0.12 mm ▪ diameter of cable sheath: 6.05 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Fca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum





8 592920 117255

S5194 500/-/-/500

23 05 059 009

SALE

coaxial cable type: 3C2V ▪ intended use: replacement of drilling of the walls ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.5 mm ▪ dielectric type, diameter: PE 1.6 mm ▪ number of shieldings: 1 ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 3 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PE packet







8 592920 026922

S5378
23 05 032 010
1/-/-/500

---

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 5 m, headercard







8 595025 370648

S5373
23 05 120 010
1/-/-/16
SALE

---

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 10 m, hanging







8 595025 370655

S5374
23 05 120 020
1/-/-/24

---

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 15 m, headercard







8 595025 370662

S5375
23 05 120 030
1/-/-/16
SALE

---

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 20 m, headercard







8 595025 386250

S5376
23 05 120 040
1/-/-/16

Connection AV cables

AV cables blister

- cables for analog and digital AV signal transmission
- support for standardized video and audio protocols
- fitted with connectors for common consumer interfaces

SB3115

23 33 131 150

8 595025 375834

1/-/-/12

SALE

Audio + video

Double shielding



connectors: IEC plug – IEC socket 90° ▪ connector type: 1× direct, 1× angular ▪ length: 15 m ▪ number of shieldings: 2 ▪ packaging: 1 pc, blister

AV cables hanger

- cables for analog and digital AV signal transmission
- support for standardized video and audio protocols
- fitted with connectors for common consumer interfaces

SL2001

23 33 020 010

8 595025 380487

1/5/20/80

1.5 m



length: 1.5 m ▪ connectors: SCART plug – SCART plug ▪ packaging: 1 pc, plastic hanging

SL0301

23 33 003 010

8 595025 374882

1/5/20/80

1.5 m



connectors: A plug – A plug ▪ connector type: 2× direct ▪ length: 1.5 m ▪ support of image resolution: 4K ▪ maximum bit rate: 10.2 Gbit/s ▪ material: nylon ▪ packaging: plastic hanging

SL0101 1/5/20/80

23 33 001 010

8 595025 374868



connectors: A plug – A plug ▪ connector type: 2× direct ▪ length: 1.5 m ▪ support of image resolution: 4K ▪ maximum bit rate: 10.2 Gbit/s ▪ material: PVC ▪ packaging: plastic hanging

AV cables paper blister

- compatibility with standards for multimedia transmission
- connection of various devices thanks to straight and angled connectors

S70203 1/-/-/20

23 33 170 010

8 592920 107638



- length: 1 m
- connectors: A plug – micro B plug
- using: charging/data
- USB version: 3.0
- packaging: 1 pc, blister

S70202 1/-/-/20

23 33 170 023

8 592920 107621



- length: 2 m
- connectors: A plug – B plug
- using: charging/data
- USB version: 2.0
- packaging: 1 pc, blister

S70201 1/-/-/20

23 33 170 022

8 592920 107614



- length: 2 m
- connectors: A plug – A socket
- using: charging/data
- USB version: 2.0
- packaging: 1 pc, blister

S70200 1/-/-/20

23 33 170 021

8 592920 107607



- length: 2 m
- connectors: A plug – A plug
- using: charging/data
- USB version: 2.0
- packaging: 1 pc, blister

S31510 1/-/-/12

23 33 130 152

8 592920 107799



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 15 m
- number of shieldings: 2
- packaging: 1 pc, blister

S31500 1/-/-/10

23 33 130 151

8 592920 107720



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 15 m
- number of shieldings: 2
- packaging: 1 pc, blister

S31010 1/-/-/20

23 33 130 102

8 592920 107782



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 10 m
- number of shieldings: 2
- packaging: 1 pc, blister

S31000 1/-/-/20

23 33 130 101

8 592920 107713



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 10 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30710 1/-/-/20

23 33 130 751

8 592920 107836



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 7.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30700 1/-/-/20

23 33 130 750

8 592920 107768



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 7.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30510 1/-/-/20

23 33 130 052

8 592920 107829



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30500 1/-/-/20

23 33 130 051

8 592920 107751



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30310 1/-/-/20

23 33 130 351

8 592920 107812



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 3.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30300 1/-/-/20

23 33 130 350

8 592920 107744



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 3.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30210 1/-/-/20

23 33 130 251

8 592920 107805



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 2.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30200 1/-/-/20

23 33 130 250

8 592920 107737



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 2.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30110 1/-/-/20

23 33 130 121

8 592920 107775 | 1.25 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 1.25 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30100 1/-/-/20

23 33 130 120

8 592920 107706 | 1.25 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 1.25 m
- number of shieldings: 2
- packaging: 1 pc, blister

S11000 1/-/-/10

23 33 101 100

8 592920 107881 | 10 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 10 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10510 1/-/-/10

23 33 101 052

8 592920 107942 | 5 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 1× direct, 1× angular
- length: 5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10500 1/-/-/10

23 33 101 051

8 592920 107874 | 5 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10310 1/-/-/20

23 33 101 032

8 592920 107935 | 3 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 1× direct, 1× angular
- length: 3 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10300 1/-/-/20

23 33 101 031

8 592920 107867 | 3 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 3 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10110 1/-/-/20

23 33 101 015

8 592920 107928 | 1.5 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 1× direct, 1× angular
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10103 1/-/-/20

23 33 101 014

8 592920 107911 | 1.5 m | 2.0 Version



- connectors: A plug – D plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10102 1/-/-/20

23 33 101 013

8 592920 107904 | 1.5 m | 2.0 Version



- connectors: A plug – C plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

S10101 1/-/-/20

23 33 101 016



8 592920 107959



- connectors: A plug – A plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.1
- support of image resolution: 8K
- maximum bit rate: 48 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10100 1/-/-/20

23 33 101 011



8 592920 107850



- connectors: A plug – A plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10000 1/-/-/20

23 33 101 070



8 592920 107843



- connectors: A plug – A plug
- connector type: 2× direct
- length: 0.75 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

Smartphone cables

- data and charging cables for devices with various connectors
- variable maximum power and cable lengths

length: 2 m ▪ connectors: C plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 5 A ▪ maximum power: 100 W ▪ packaging: 1 pc, small box







8 592920 136102

SM7029BL 1/-/-/120

23 35 072 220

length: 1 m ▪ connectors: C plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 5 A ▪ maximum power: 100 W ▪ packaging: 1 pc, small box







8 592920 136096

SM7028BL 1/-/25/100

23 35 072 210

length: 1 m ▪ connectors: C plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 3 A ▪ maximum power: 60 W ▪ packaging: 1 pc, small box





1 m | USB Data/Charge | 480 Mbit/s | 3 A | 60 W

8 592920 118436

SM7027W 1/-/25/100

23 35 076 013

---

length: 1.5 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 5 A ▪ maximum power: 22,5 W ▪ packaging: 1 pc, small box





1.5 m | USB Data/Charge | 480 Mbit/s | 5 A | 22.5 W

8 592920 090367

SM7026 1/-/25/100

23 35 076 011

---

length: 1 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 3 A ▪ maximum power: 18 W ▪ packaging: 1 pc, small box





1 m | USB Data/Charge | 480 Mbit/s | 3 A | 18 W

8 592920 068878

SM7025W 1/-/25/100

23 35 072 500

---

length: 1 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 3 A ▪ maximum power: 18 W ▪ packaging: 1 pc, small box





1 m | USB Data/Charge | 480 Mbit/s | 3 A | 18 W

8 592920 068908

SM7025BL 1/-/25/100

23 35 072 501

---

length: 1 m ▪ connectors: C plug – C plug ▪ using: charging/data ▪ USB version: 3.1 ▪ maximum current: 3 A ▪ maximum power: 60 W ▪ packaging: 1 pc, small box





1 m | USB Data/Charge | 10 Gbit/s | 3 A | 60 W

8 592920 039366

SM7022BL 1/-/25/50

23 35 072 200

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

length: 1 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 3.1 ▪ maximum current: 2 A ▪ maximum power: 18 W ▪ packaging: 1 pc, small box





1 m | USB Data/Charge | 480 Mbit/s | 2 A | 18 W

8 592920 039335

SM7021BL 1/-/25/100

23 35 072 100

---

length: 1 m ▪ connectors: C plug – i16P plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 3 A ▪ maximum power: 27 W ▪ packaging: 1 pc, small box





1 m | USB Data/Charge | 480 Mbit/s | 3 A | 27 W | MFi Certified

8 592920 118443

SM7015W 1/-/25/100

23 35 076 014

---

length: 1 m ▪ connectors: A plug – i16P plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 2.4 A ▪ maximum power: 12 W ▪ packaging: 1 pc, small box





1 m | USB Data/Charge | 480 Mbit/s | 2.4 A | 12 W | MFi Certified

8 592920 015575

SM7013W 1/-/25/100

23 35 071 310

---

length: 2 m ▪ connectors: A plug – mini B plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 0.5 A ▪ maximum power: 2.5 W ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 2 m | Charging | USB data

8 592920 085677

SM7009BL 1/-/-/120

23 35 076 020

---

length: 2 m ▪ connectors: A plug – micro B plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 2 A ▪ maximum power: 10 W ▪ packaging: 1 pc, small box





2 m | USB Data/Charge | 480 Mbit/s | 2 A | 10 W

8 592920 085714

SM7008BL 1/-/-/120

23 35 076 021

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

length: 1 m ▪ connectors: A plug – micro B plug ▪ using: charging/data ▪ USB version: 2.0 ▪ maximum current: 2 A ▪ maximum power: 10 W ▪ packaging: 1 pc, small box







8 592920 035887

SM7004B
23 35 070 420

1/-/25/100

---

connectors: 3.5 mm plug – 3.5 mm socket ▪ stereo ▪ length: 5 m ▪ packaging: 1 pc, small box







8 592920 085790

SM5105
23 35 050 050

1/-/-/100

SALE

---

connectors: 3.5 mm plug – 3.5 mm plug ▪ stereo ▪ length: 3 m ▪ packaging: 1 pc, small box







8 592920 085752

SM5003
23 35 050 030

1/-/-/100

SALE

Solid, flexible cables

Solid cables CYKY-J

- round copper cables for wiring: distribution board to socket
- installation into plaster or cable channel (wall-mounted)
- contain 3 conductors (strands) with 1.5 or 2.5 mm² diameter
- tough insulation, black colour
- length: 100 m

A3010 100/-/-/100

31 16 301 000

8 592920 117842



- conductor cross section: 3× 2.5 mm²
- designation: CYKY-J
- colour: black
- packaging: 100 m, foil

A3004 100/-/-/100

31 16 300 400

8 592920 117835



- conductor cross section: 3× 1.5 mm²
- designation: CYKY-J
- colour: black
- packaging: 100 m, foil

Flexible cables PVC CYSY

- round copper cables for interiors
- ideal for appliances such as fridges, washing machines etc.
- contain 3 conductors with 1 or 1.5 mm² diameter
- soft insulation, white colour
- length: 100 m

A3369 100/-/-/100

31 16 336 900

8 592920 117811



- conductor cross section: 3× 1.5 mm²
- designation: H05VV-F
- colour: white
- packaging: 100 m, foil

A3366 100/-/-/100

31 16 336 600

8 592920 117828



- conductor cross section: 3× 1.0 mm²
- designation: H05VV-F
- colour: white
- packaging: 100 m, foil

HF signal receiving components, antennas, small electronic, accessories



Antennas

CITY

City

- for installation in areas with sufficient signal quality
- equipped with an LTE filter to suppress interference from mobile signals
- selected models include a 5G filter
- reception possible in both horizontal and vertical polarization

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 47–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.5 m ▪ dimensions: 128 × 240 × 230 mm ▪ packaging: 1 pc, box





Digital TV | FM/DAB | USB 5 V/550 mA | Indoor | 1.5 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119389

J0701 1/-/-/10

27 02 031 000

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 2 m ▪ dimensions: 8 × 345 × 77 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/550 mA | Indoor | 2 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119631

J0703 1/-/-/20

27 02 033 000

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/DAB/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.5 m ▪ dimensions: 200 × 40 × 230 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/550 mA | Indoor | 1.5 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119464

J0704 1/-/-/10

27 02 034 000

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 87.5–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.5 m ▪ dimensions: 110 × 290 × 220 mm ▪ packaging: 1 pc, box





Digital TV | FM/DAB | USB 5 V/550 mA | Indoor | 1.5 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119716

J0705 1/-/-/10

27 02 035 000

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 87.5–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.85 m ▪ dimensions: 300 × 80 × 45 mm ▪ packaging: 1 pc, box





Digital TV | FM/DAB | USB 5 V/200 mA | Indoor | 1.85 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119624

J0708 1/-/-/20

27 02 038 000

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors: IEC ▪ dimensions: 1.3 × 228 × 128 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/550 mA | Indoor | 1.85 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119976

J0709 1/-/-/22

27 02 039 000

VILLAGE

Village

- for locations with lower signal levels (farther from the transmitter)
- equipped with an LTE filter to suppress interference from mobile signals
- installation possible in both horizontal and vertical polarization

---

use: outdoor ▪ suitable for long distance reception ▪ signal reception: DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: UHF ▪ frequency range: 470–698 MHz ▪ number of elements: 20 ▪ reception angle: 30°/40° ▪ power supply: DC 5–12 V/100 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: F connector ▪ length of coaxial cable in the package: 10 m ▪ dimensions: 400 × 39 × 330 mm ▪ packaging: 1 pc, box



Digital TV | 5–12 V 100 mA | IN/OUT | 10 m cable | Village | 5G Filter

8 592920 125441

J0806 1/-/-/1

27 04 350 000

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/DAB/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 2 pc ▪ connectors: F, IEC ▪ length of coaxial cable in the package: 8.5 m ▪ dimensions: 40 × 130 × 320 mm ▪ packaging: 1 pc, box



Digital TV | DAB | USB 5 V/550 mA | IN/OUT | 8.5 m cable | Village | 5G Filter | EASY TO INSTALL | dab+

8 592920 119525

J0804 1/-/-/2

27 04 340 000

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/UHF ▪ frequency range: 47–698 MHz ▪ reception angle: 360° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors: IEC ▪ length of coaxial cable in the package: 5 m ▪ dimensions: 300 × 40 mm ▪ packaging: 1 pc, box



Digital TV | FM/DAB | USB 5 V/200 mA | IN/OUT | 5 m cable | Village | 5G Filter | EASY TO INSTALL | dab+

8 592920 119709

J0803 1/-/-/2

27 04 330 000

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 87.5–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors in the package: 2 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 5 m ▪ dimensions: 230 × 80 × 120 mm ▪ packaging: 1 pc, box



Digital TV | FM/DAB | USB 5 V/200 mA | IN/OUT | 5 m cable | Village | 5G Filter | EASY TO INSTALL | dab+

8 592920 118894

J0802 1/-/-/10

27 04 320 000

www.emos.eu | Order Code Item Number | Packaging Type

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: UHF ▪ frequency range: 470–698 MHz ▪ reception angle: 90° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 2 pc ▪ connectors: F, IEC ▪ length of coaxial cable in the package: 8.5 m ▪ dimensions: 230 × 325 × 20 mm ▪ packaging: 1 pc, box



Digital TV | USB 5 V/550 mA | IN/OUT | 8.5 m cable | Village | 5G Filter | EASY TO INSTALL

8 592920 119518

J0801 1/-/-/10

27 04 310 000

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: UHF ▪ frequency range: 470–698 MHz ▪ number of elements: 10 ▪ reception angle: 30°/40° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors: F, IEC ▪ length of coaxial cable in the package: 5 m ▪ dimensions: 315 × 215 × 200 mm ▪ packaging: 1 pc, box



Digital TV | USB 5 V/550 mA | IN/OUT | 5 m cable | Village | 5G Filter | EASY TO INSTALL

8 592920 091166

J0685 1/-/-/8

27 02 029 000

PROFI

Profi

- for locations with low signal levels (far from the transmitter)
- equipped with an LTE filter to suppress interference from mobile signals
- selected models include a 5G filter
- installation possible in both horizontal and vertical polarization

---

- use: outdoor YAGI
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–698 MHz
- number of elements: 16
- reception angle: 38°/80°
- connectors in the package: 1 pc
- connectors: F connector
- dimensions: 790 × 510 × 440 mm
- packaging: 1 pc, box



Digital TV | UHF | 5G Protected | Profi | 5G Filter | EASY TO INSTALL

8 592920 119723

J0906 1/-/-/6

27 04 560 000

- use: outdoor YAGI
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–698 MHz
- number of elements: 27
- reception angle: 38°/80°
- connectors in the package: 1 pc
- connectors: F connector
- dimensions: 1060 × 580 × 600 mm
- packaging: 1 pc, box



Digital TV | UHF | 5G Protected | Profi | 5G Filter | EASY TO INSTALL

8 592920 119730

J0907 1/-/-/6

27 04 570 000

- use: outdoor
- suitable for long distance reception
- suitable for reception from multiple transmitters
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter
- polarization: horizontal or vertical
- frequency bands: UHF

- frequency range: 470–698 MHz
- number of elements: 29
- reception angle: 38°/80°
- power supply: passive
- connectors: F connector
- dimensions: 1 150 × 520 × 640 mm
- packaging: 1 pc, box



Digital TV | UHF | 5G Protected | Profi | 5G Filter | EASY TO INSTALL

8 592920 104927

J0690 1/-/-/4

27 04 039 000

- use: outdoor
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–790 MHz

- number of elements: 26
- reception angle: 45°/40°
- power supply: passive
- connectors: F connector
- dimensions: 940 × 315 × 38 mm
- packaging: 1 pc, box



Digital TV | UHF | LTE 790 MHz | Profi

8 595025 399748

J0669 1/-/-/1

27 04 280 010

- use: outdoor
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–790 MHz

- number of elements: 16
- reception angle: 34°/26°
- power supply: passive
- connectors: F connector
- dimensions: 1000 × 360 × 340 mm
- packaging: 1 pc, header card



Digital TV | UHF | LTE 790 MHz | Profi

8 592920 055533

J0680 1/-/-/1

27 04 030 000

- use: outdoor logaritmic-periodical
- suitable for long distance reception
- suitable for reception from multiple transmitters
- signal reception: DAB/DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: VHF/DAB/UHF

- frequency range: 170–790 MHz
- reception angle: 30°/40°
- power supply: 12 V/100 mA (included)
- connectors: F connector
- dimensions: 178 × 560 × 780 mm
- packaging: 1 pc, box



Digital TV | VHF/UHF | DAB | 12 V/100 mA | LTE 790 MHz | Profi | dab+

8 595025 394118

J0665 1/-/-/1

27 03 105 000

- use: outdoor logaritmic-periodical
- suitable for long distance reception
- suitable for reception from multiple transmitters
- signal reception: DAB/DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: VHF/DAB/UHF

- frequency range: 170–790 MHz
- reception angle: 30°/40°
- power supply: 12 V/100 mA (included)
- connectors: F connector
- dimensions: 178 × 560 × 780 mm
- packaging: 1 pc, box



Digital TV | VHF/UHF | DAB | 12 V/100 mA | LTE 790 MHz | Profi | dab+

8 595025 394125

J0666 1/-/-/1

27 03 106 000

TV signal receivers

TV signal receivers

- for reception of digital DVB-T2 television signal
- seamlessly decodes H.264 and H.265 (HEVC) video formats
- ideal solution for hospitals, hotels and senior homes

DVB-T/DVB-T2 : DVB-T2 ▪ connectors: 1× USB 2.0, 1× HDMI 1.4, 1× miniUSB, 1× IEC, 1× SCART ▪ tuner frequency range: 174–230MHz, 474–860 MHz ▪ input level of signal: -75.2 to -23.9 dBm ▪ update via USB ▪ PVR recording function: yes, via USB up to 1 TB ▪ recording format: TS free to be reproduced ▪ file format on USB device: FAT16, FAT32, NTFS ▪ EPG program guide: 7 days ▪ power supply: 220–240 V AC 50/60 Hz ▪ consumption (on/stand-by): 5 W/<1 W ▪ dimensions: 120 × 75 × 25 mm ▪ packaging: 1 pc, box





8 592920 083987

J6014 1/-/-/20

25 20 236 400

Accessories

- replacement remote controls and a simplified remote control for easier use

J50989 1/-/-/220

25 20 900 089

8 592920 087954



designed for: EM190/EM190S/EM190L ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ dimensions: 170 × 55 × 20 mm ▪ weight: 100 g ▪ packaging: 1 pc, PVC packet

J50988 1/-/-/200

25 20 900 088

8 592920 084786



designed for: EM190/EM190S/EM190L ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ dimensions: 175 × 45 × 15 mm ▪ weight: 100 g ▪ packaging: 1 pc, PVC packet

Wall sockets

- certified components designed for professionals and hobbyists
- selected materials ensure excellent technical properties
- designed for processing and transmission of digital signals

---

- version: loop-through
- designation: TV (7) + R (7) + SAT (10)
- terminal attenuation: 7 dB
- insertion loss: 3 dB
- connector type: IEC + F (female)
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box







8 595025 389381

J0260 1/-/-/60

25 01 000 400

- version: terminal
- designation: TV (2) + R (2) + SAT (3)
- terminal attenuation: 3 dB
- connector type: IEC + F (female)
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box







8 595025 378460

J0240E 1/-/-/100

25 01 000 330

- version: terminal
- designation: TV (2) + R (2) + SAT (3)
- terminal attenuation: 3 dB
- connector type: IEC + F (female)
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box







8 595025 301802

J0240 1/-/-/60

25 01 000 300

- version: loop-through
- designation: TV (14) + R (14)
- terminal attenuation: 14 dB
- insertion loss: 1.5 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box







8 595025 301734

J0222 1/-/-/60

25 01 100 300

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- version: loop-through
- designation: TV (7) + R (7)
- terminal attenuation: 7 dB
- insertion loss: 3 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box







8 595025 311955

J0220J

25 01 100 100

1/-/-/60

- version: terminal
- designation: TV (1) + R (2)
- terminal attenuation: 1 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box







8 595025 301741

J0203

25 01 000 200

1/-/-/60

SALE

- version: terminal
- designation: TV (3.5) + R (4)
- terminal attenuation: 3 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box







8 595025 301727

J0200

25 01 000 100

1/-/-/60

Accessories

Combiners, splitters

- combine terrestrial and satellite broadcast signals
- combine terrestrial signals from multiple antennas
- models suitable for indoor and outdoor use
- split the signal into up to 4 outputs
- selected models allow DC power pass-through

- product: signal combiner TV+R
- inputs: 2
- outputs: 1
- connectors: IEC
- frequency range: 0.1–1 000 MHz
- insertion loss: 3.5 dB
- power pass
- body material: zinc casting
- working temperature: -10–+65 °C

- using: TV + R
- IP rating: IP20
- dimensions: 17 × 32 × 23 mm
- packaging: 1 pc, PVC packet





8 595025 316370

J0197 1/-/10/200

25 03 000 100

- product: signal combiner SAT+TV
- inputs: 2
- outputs: 1
- suitable for merging of satellite signals
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 3.5 dB
- power pass: yes, SAT
- body material: zinc casting

- working temperature: -10–+65 °C
- using: TV + R + SAT
- IP rating: IP53
- dimensions: 25 × 35 × 20 mm
- packaging: 1 pc, PVC packet





8 592920 040928

J0198 1/-/10/200

25 03 000 400

SALE

- product: splitter
- number of inputs: 1
- number of outputs: 2
- connectors: IEC
- frequency range: 0.1–1 000 MHz
- insertion loss: 3.5 dB
- power pass
- hub body material: zinc casting
- working temperature: -10–+65 °C

- using: TV + R
- IP rating: IP20
- dimensions: 17 × 32 × 23 mm
- packaging: 1 pc, header card





8 595025 316387

J0199 1/-/10/200

25 04 200 100

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- number of inputs: 1
- number of outputs: 2
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 3.7 dB
- power pass: yes, 2×
- hub body material: zinc casting
- working temperature: -10–+65 °C
- using: TV + R

- IP rating: IP20
- dimensions: 25 × 35 × 20 mm
- packaging: 1 pc, box





5-2 400 MHz | 3.7 dB | A Class

8 592920 090695

J0102 | 1/-/10/200

25 04 500 110

- number of inputs: 1
- number of outputs: 3
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 6 dB
- power pass: yes, 3×
- hub body material: zinc casting
- working temperature: -10–+65 °C
- using: TV + R + SAT

- IP rating: IP20
- dimensions: 20 × 56 × 25 mm
- packaging: 1 pc, box





5-2 400 MHz | 6 dB | A Class

8 592920 090701

J0103 | 1/-/10/200

25 04 600 110

- number of inputs: 1
- number of outputs: 4
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 7.5 dB
- power pass: yes, 4×
- hub body material: zinc casting
- working temperature: -10–+65 °C
- using: TV + R + SAT

- IP rating: IP20
- dimensions: 20 × 56 × 25 mm
- packaging: 1 pc, box





5-2 400 MHz | 7.5 dB | A Class

8 592920 090718

J0104 | 1/-/10/200

25 04 700 110

Amplifiers, preamplifiers, LTE filters

- improvement of signal quality and stability
- solution for weak or disturbed signal issues
- suitable for antenna and signal distribution systems
- easy installation into existing systems
- reliable operation for home and professional use

---

product: antenna preamplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 5–260 MHz, 470–790 MHz ▪ gain: 30 dB ▪ noise figure: <3.0 dB ▪ connectors: F female ▪ IP rating: IP45 ▪ hole spacing: 27 mm ▪ power supply: 12 V/50 mA ▪ dimensions: 12 × 44 × 40 mm ▪ packaging: 1 pc, PVC packet





30 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 595025 386755

J5803 | 1/-/10/200

25 07 100 700

product: antenna preamplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 5–260 MHz, 470–790 MHz ▪ gain: 25 dB ▪ noise figure: <3.0 dB ▪ connectors: F female ▪ IP rating: IP45 ▪ hole spacing: 27 mm ▪ power supply: 12 V/50 mA ▪ dimensions: 12 × 44 × 40 mm ▪ packaging: 1 pc, PVC packet





25 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 595025 386748

J5802 1/-/10/200

25 07 100 600

---

product: 5G filter ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 0.3–694 MHz ▪ stop band: 700–2 400 MHz ▪ attenuation in the stop band: >40 dB ▪ connectors: IEC connector ▪ IP rating: IP20 ▪ power pass: yes, 300 mA ▪ dimensions: 16 × 68 mm ▪ packaging: 1 pc, box





0.3–694 MHz | > 40 dB | 5G Protected

8 592920 090732

J5712 1/-/10/200

25 08 100 200

---

product: 5G filter ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 0.3–694 MHz ▪ stop band: 700–2 400 MHz ▪ attenuation in the stop band: >40 dB ▪ connectors: F female ▪ IP rating: IP20 ▪ power pass: yes, 300 mA ▪ dimensions: 16 × 40 mm ▪ packaging: 1 pc, box





0.3–694 MHz | > 40 dB | 5G Protected

8 592920 090725

J5711 1/-/10/200

25 08 100 100

---

product: shielded line amplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 470–790 MHz ▪ stop band: 790–2 200 MHz ▪ gain: 30 dB ▪ noise figure: <2.0 dB ▪ maximum output signal level: 104 dBµV ▪ connectors: F female ▪ IP rating: IP45 ▪ power supply: 5–12 V DC, 65 mA ▪ dimensions: 20 × 42 mm ▪ packaging: 1 pc, header card





30 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 592920 040966

J5710 1/-/10/200

25 08 000 900

---

product: shielded line amplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 470–790 MHz ▪ stop band: 790–2 200 MHz ▪ gain: 20 dB ▪ noise figure: <2.0 dB ▪ maximum output signal level: 104 dBµV ▪ connectors: F female ▪ IP rating: IP45 ▪ power supply: 5–12 V DC, 65 mA ▪ dimensions: 20 × 42 mm ▪ packaging: 1 pc, header card





20 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 592920 040942

J5709 1/-/10/200

25 08 000 810

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

product: broadband home amplifier ▪ inputs: 1 ▪ number of outputs: 2 ▪ frequency range: 47–230 MHz, 470–698 MHz ▪ stop band: 400–470 MHz, 699–2 200 MHz ▪ gain: 25 dB ▪ gain control: 0–15 dB ▪ noise figure: <3.0 dB ▪ maximum output signal level: 108 dBµV ▪ connectors: F female ▪ IP rating: IP20 ▪ power supply: 230 V +/-10 %, 50/60 Hz, 3 W ▪ dimensions: 105 × 135 × 40 mm ▪ packaging: 1 pc, box





47–230 MHz 470–698 MHz | 10–25 dB | 230 V/50 Hz | 5G Filter

8 592920 084854

J0400 1/-/-/40

25 06 000 800

Power supply units for antennas

- for powering antenna preamplifiers and splitters
- reliable power supply for antenna systems
- stable operation for high-quality signal reception
- suitable for home and professional installations
- easy connection to antenna distribution systems

version: SMPS switched ▪ designed for: power supply of antenna preamplifiers ▪ power supply: 110–230 V ▪ output voltage: 12 V ▪ output current: 100 mA ▪ ECO design ▪ standby power consumption: <0.3 W ▪ power supply shunt ▪ input connector of the power injector: F connector ▪ output connector of the power injector: F connector ▪ power cable: 1.5 m ▪ dimensions: 24 × 68 × 35 mm ▪ packaging: 1 pc, box





47–862 MHz | 12 V/100 mA

8 592920 006580

J58133 1/-/-/70

17 02 010 034

version: SMPS switched ▪ designed for: power supply of antenna preamplifiers ▪ power supply: 110–230 V ▪ output voltage: 12 V ▪ output current: 300 mA ▪ ECO design ▪ standby power consumption: <0.3 W ▪ power supply shunt ▪ input connector of the power injector: F connector ▪ output connector of the power injector: IEC ▪ power cable: 1.5 m ▪ dimensions: 70 × 57 × 23 mm ▪ packaging: 1 pc, box





47–862 MHz | 12 V/300 mA

8 592920 017647

J5810 1/-/-/80

17 02 010 035

Holders for satellite, terrestrial antennas

- mounts for TV antennas, internet antennas and satellite dishes
- for wall, mast or balcony railing mounting
- galvanized surface ensures protection against corrosion

J60030 1/-/-/1

25 21 000 030

8 595025 325037



holder type: holder with crossing for the antennas ▪ length from the base: 250 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 28 mm ▪ height: 630 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60110 1/-/-/100

25 21 000 110

8 595025 344823



holder type: holder basic ▪ length from the base: 250 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 28 mm ▪ height: 130 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60130 1/-/-/1

25 21 000 130

8 595025 325075



holder type: holder with crossing ▪ length from the base: 350 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 40 mm ▪ height: 150 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60140 1/-/-/1

25 21 000 140

8 595025 325082



holder type: holder with crossing ▪ length from the base: 500 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 40 mm ▪ height: 150 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60170 1/-/-/1

25 21 000 170

8 595025 325099



holder type: pole holder ▪ length from the base: 350 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 40 mm ▪ height: 150 mm ▪ mounting adapted to: mast ▪ packaging: 1 pc, no packaging

ZigBee GoSmart

EMOS GoSmart

- integration of the smart home into one system
- convenient control via mobile application
- support for multiple communication protocols
- compatible with EMOS GoSmart products and TUYA devices

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

- product: ZigBee repeater
- connectivity: 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- power supply: 5 V DC/1.0 A
- supported OS: Android, iOS





ZigBee 3.0

8 592920 128725

H5022
30 69 052 030

1/-/-/54

- product: IP gateway
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- maximum number of connected clients: 128
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi/Zigbee 3.0/BLE/SigMesh
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 5 V DC/1.0 A
- supported OS: Android, iOS





Wi Fi ZigBee BLE SigMesh

8 592920 156476

H5002
30 69 050 020

1/-/-/48

NEW

Videophones, doorbells, cameras, surveillance



Home videophones, sets

Videophones and video doorbells GoSmart

EMOS GoSmart

- control of access to home and business premises
- instant notifications to mobile devices
- two-way communication with visitors
- automatic recording upon motion detection
- night vision for low-light conditions
- connection to the home network via WiFi protocol
- compatible with EMOS GoSmart products and TUYA devices
- voice control support via Google Assistant and Amazon Alexa

Powered by tuya | Works with Amazon Alexa Google Assistant | App Store | Google Play

product type: video doorbell ▪ lock control ▪ additional indoor bell ▪ camera viewing angle: 160° ▪ camera resolution: 1 920 × 1 080 ▪ motion detection ▪ IR CUT ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ SD card storage ▪ cloud storage ▪ anti-theft protection ▪ voice communication: two-way ▪ notifications to the mobile app ▪ WebRTC function





Wi Fi | RJ45 PoE | 2 MPx Resolution | Night vision | 160° | Motion detection | Door control | RFID | 2 way audio | IR CUT Day/Night

8 592920 138229

H4034 1/-/-/8

30 10 040 340

product type: video doorbell ▪ lock control ▪ additional indoor bell ▪ camera viewing angle: 160° ▪ camera resolution: 1 920 × 1 080 ▪ motion detection ▪ IR CUT ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ SD card storage ▪ cloud storage ▪ anti-theft protection ▪ voice communication: two-way ▪ notifications to the mobile app ▪ WebRTC function





Wi Fi | RJ45 PoE | 2 MPx Resolution | Night vision | 160° | Motion detection | Door control | RFID | 2 way audio | IR CUT Day/Night

8 592920 138205

H4033 1/-/-/8

30 10 040 330

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

product type: video doorbell ▪ lock control ▪ additional indoor bell ▪ camera viewing angle: 110° ▪ camera resolution: 1 920 × 1 080 ▪ motion detection ▪ IR CUT ▪ siren ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ SD card storage ▪ cloud storage ▪ anti-theft protection ▪ control by voice assistants ▪ voice communication: two-way ▪ notifications to the mobile app ▪ WebRTC function





Wi Fi | FULL HD Resolution 1 080p | Night vision | 110° | Motion detection | 2 way audio | IR CUT Day/Night | Siren 85 dB | Door control | PIR sensor

8 592920 117569

H4031 1/-/-/12

30 10 040 310

---

product type: video doorbell ▪ lock control ▪ additional indoor bell ▪ camera viewing angle: 110° ▪ camera resolution: 1 920 × 1 080 ▪ motion detection ▪ IR CUT ▪ siren ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ SD card storage ▪ cloud storage ▪ anti-theft protection ▪ control by voice assistants ▪ voice communication: two-way ▪ notifications to the mobile app ▪ WebRTC function





Wi Fi | Rechargeable 4 000 mAh | FULL HD Resolution 1 080p | Night vision | 110° | 2 way audio | IR CUT Day/Night | Siren 85 dB | Door control | Solar charging

8 592920 117545

H4030 1/-/-/8

30 10 040 300

---

product: video phone ▪ screen size: 7" ▪ lock and gate control ▪ intercom ▪ power supply for the monitor: 12 V DC (included) ▪ recommended camera unit: H3016, H3017, H3018, H3019 ▪ monitor size: 175 × 118 × 25 mm ▪ packaging: 1 pc, box





Wi Fi | FULL HD Resolution 1 080p | Night vision | Door/Gate control | 2 way audio | Touch screen | Monitor intercom | Micro SD max. 128 GB | Cloud storage

8 592920 129692

H4021 1/-/-/6

30 10 040 210

---

product: doorphone set with WiFi ▪ screen size: 7" ▪ possibility to record ▪ lock control ▪ gate control ▪ intercom ▪ power supply for the screen: 12 V DC (included) ▪ optional connection of CCTV camera ▪ monitor size: 175 × 118 × 25 mm ▪ dimensions of the camera unit: 142 × 44 × 21 mm ▪ camera viewing angle: 160° ▪ packaging: 1 pc, box ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, Open system ▪ protocol: Wi-fi ▪ connectivity: 2.4 GHz WIFI ▪ voice communication: two-way ▪ other function: multimedia playback, answering machine





Wi Fi | FULL HD Resolution 1 080p | Night vision | 160° | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Video guard | Touch screen

8 592920 129678

H4020 1/-/-/4

30 10 040 200

---

product: doorphone set with WiFi ▪ screen size: 7" ▪ possibility to record ▪ lock control ▪ gate control ▪ intercom ▪ power supply for the screen: 24 V DC (BUS) ▪ optional connection of CCTV camera ▪ monitor size: 152 × 205 × 22 mm ▪ dimensions of the camera unit: 125 × 235 × 35 mm ▪ camera viewing angle: 170° ▪ packaging: 1 pc, paper box ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, Open system ▪ protocol: Wi-fi ▪ connectivity: 2.4 GHz WIFI ▪ voice communication: two-way ▪ other function: unlocking via rfid chip or fingerprint, doorbell button





Wi Fi | FULL HD Resolution 1 080p | Night vision | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Touch screen | Fingerprint unlock | 2 Wires IP

8 592920 157527

H4080 1/-/-/4

30 10 040 800

NEW

www.emos.eu | Order Code Item Number | Packaging Type

product: video phone ▪ screen size: 7" ▪ lock and gate control: door lock, the gate rails ▪ intercom ▪ power supply for the monitor: 24 V DC (BUS) ▪ recommended camera unit: H4082, H4083, H4084 ▪ monitor size: 152 × 205 × 22 mm ▪ packaging: 1 pc, box





Wi Fi | FULL HD Resolution 1 080p | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Touch screen | Micro SD max. 128 GB | 2 Wires IP

8 592920 157541

H4081 | 1/-/-/12

30 10 040 810 | NEW

---

product: camera unit for 1 user ▪ number of buttons on the camera unit: 1 ▪ power supply: 24 V DC (BUS) ▪ number of wiress (monitor/lock/power supply): 2 ▪ dimensions of the camera unit: 125 × 235 × 35 mm ▪ IP rating: IP44 ▪ camera viewing angle: 170° ▪ door lock control ▪ installation: surface/surfaced ▪ packaging: 1 pc, box




Wi Fi | FULL HD Resolution 1 080p | Night vision | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Weather proof | 2 Wires IP | RFID

8 592920 157565

H4082 | 1/-/-/6

30 10 040 820 | NEW

---

product: camera unit for 2 users ▪ number of buttons on the camera unit: 2 ▪ power supply: 24 V DC (BUS) ▪ number of wiress (monitor/lock/power supply): 2 ▪ dimensions of the camera unit: 125 × 235 × 35 mm ▪ IP rating: IP44 ▪ camera viewing angle: 170° ▪ door lock control ▪ installation: surface/surfaced ▪ packaging: 1 pc, box




Wi Fi | FULL HD Resolution 1 080p | Night vision | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Weather proof | 2 Wires IP | RFID

8 592920 157589

H4083 | 1/-/-/6

30 10 040 830 | NEW

---

product: camera unit for 3 users ▪ number of buttons on the camera unit: 3 ▪ power supply: 24 V DC (BUS) ▪ number of wiress (monitor/lock/power supply): 2 ▪ dimensions of the camera unit: 125 × 235 × 35 mm ▪ IP rating: IP44 ▪ camera viewing angle: 170° ▪ door lock control ▪ installation: surface/surfaced ▪ packaging: 1 pc, box




Wi Fi | FULL HD Resolution 1 080p | Night vision | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Weather proof | 2 Wires IP | RFID

8 592920 157602

H4084 | 1/-/-/6

30 10 040 840 | NEW

Home videophones

- part of a modern home security system
- the set consists of a camera and a monitor with intuitive control
- expandable with additional inputs, screens or CCTV cameras
- control of gate and electric gate, touch/mechanical buttons
- higher-end video intercoms with video recording or WiFi support
- white or infrared camera illumination ensures night vision
- color display, up to 16 ringtones, power supply included

---

product: video set ▪ screen size: 7" ▪ possibility to record ▪ lock control ▪ gate control ▪ intercom ▪ power supply for the screen: 12 V DC (included) ▪ optional connection of CCTV camera ▪ monitor size: 175 × 125× 20 mm ▪ dimensions of the camera unit: 135 × 50 × 25 mm ▪ camera viewing angle: 160° ▪ packaging: 1 pc, box





8 592920 090329

H3010 1/-/-/6
30 10 003 010

---

screen size: 7" ▪ lock and gate control ▪ intercom ▪ power supply for the monitor: 12 V DC (included) ▪ recommended camera unit: H3016, H3017, H3018 ▪ monitor size: 175 × 125× 20 mm ▪ packaging: 1 pc, box





8 592920 091326

H3015 1/-/-/21
30 10 003 015

---

product: camera unit with RFID ▪ number of buttons on the camera unit: 1 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 4/2/0 ▪ dimensions of the camera unit: 131 × 47 × 18 mm ▪ IP rating: IP44 ▪ camera viewing angle: 160° ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box





8 592920 091869

H3016 1/-/-/20
30 10 003 016

---

product: camera unit with RFID ▪ number of buttons on the camera unit: 2 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 2× 4/2/0 ▪ dimensions of the camera unit: 131 × 47 × 18 mm ▪ IP rating: IP44 ▪ camera viewing angle: 160° ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box





8 592920 091890

H3017 1/-/-/20
30 10 003 017

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

product: camera unit with RFID ▪ number of buttons on the camera unit: 4 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 4× 4/2/0 ▪ dimensions of the camera unit: 131 × 47 × 18 mm ▪ IP rating: IP44 ▪ camera viewing angle: 160° ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box





RFID | 160° | Door control | Night vision

8 592920 091920

H3018 1/-/-/20

30 10 003 018

---

product: video set ▪ screen size: 7" ▪ lock control ▪ gate control ▪ power supply for the screen: 32 V / 0,8 A DC (included) ▪ monitor size: 125 × 185 × 25 mm ▪ dimensions of the camera unit: 150 × 60 × 40 mm ▪ camera viewing angle: 120° ▪ packaging: 1 pc, paper box





HD Resolution 720p | 2 way audio | Door/Gate control | IR CUT Day/Night | Water resistance

8 592920 147146

H2060 1/-/-/6

30 10 002 060

---

product: video set ▪ screen size: 7" ▪ lock control ▪ gate control ▪ power supply for the screen: 14.5 V DC (includedí ▪ monitor size: 152 × 215 × 18 mm ▪ dimensions of the camera unit: 141 × 63 × 40 mm ▪ camera viewing angle: 80° ▪ packaging: 1 pc, box





SD Resolution 480p | Night vision | Door/Gate control | 7" LCD colour | Hands free | 2 Wires | 65° | 2 WIRES | EASY TO INSTALL

8 592920 091463

H2050 1/-/-/8

30 10 002 050

SALE

---

product: video set ▪ screen size: 7" ▪ lock control ▪ gate control ▪ intercom ▪ power supply for the screen: 12 V DC (included) ▪ optional connection of CCTV camera ▪ monitor size: 233 × 23 × 160 mm ▪ dimensions of the camera unit: 64 × 46 × 145 mm ▪ camera viewing angle: 80° ▪ packaging: 1 pc, box





HD Resolution 720p | CCTV camera | Monitor intercom | Door/Gate control | Infrared night vision | 7" LCD colour | Hands free | 4+2 Wires | 65° | EASY TO INSTALL

8 592920 056929

H2017 1/-/-/6

30 10 002 017

SALE

---

product: audio doorphone set ▪ lock and gate control: door lock control ▪ power supply: Li-Ion battery 3.7 V/2 2200 mAh ▪ dimensions of the door station: 160 × 60 × 50 mm ▪ handset dimension: 155 × 56 × 36 mm ▪ packaging: 1 pc, paper box





Rechargeable 2 000 mAh | 2 way audio | Door/Gate control | Water resistance | Easy to install | Wireless

8 592920 147108

H1087 1/-/-/16

30 10 000 293

www.emos.eu

Order Code
Item Number

Packaging
Type

product: audio doorphone set ▪ lock and gate control: door lock control ▪ power supply: 100–230 V, 12 V DC ▪ dimensions of the door station: 160 × 60 × 50 mm ▪ handset dimension: 208 × 68 × 60 mm ▪ packaging: 1 pc, paper box





230 V~/50 Hz | 2 way audio | Door/Gate control | Water resistance | Easy to install | Wireless

8 592920 147122

H1088 30 10 000 294

1/-/-/5

product: sudio porter set ▪ lock and gate control: door lock control ▪ power supply: 12 V DC (included) ▪ number of wires (monitor/lock/gate): 2+2+0 ▪ dimensions of the door station: 35 × 65 × 145 mm ▪ handset dimension: 75 × 93 × 225 mm ▪ packaging: 1 pc, box





Water resistance | Impact resistance | Door control | 2+2 Wires

8 592920 010198

H1085 30 10 000 291

1/-/-/10

product: sudio porter set ▪ lock and gate control: door lock control ▪ power supply: 12 V DC ▪ number of wires (monitor/lock/gate): 3+2+0 ▪ dimensions of the door station: 116 × 199 × 40 mm ▪ handset dimension: 75 × 93 × 225 mm ▪ packaging: 1 pc, box





Water resistance | Impact resistance | Door control | 3+2 Wires

6 934738 480312

H1086 30 10 000 292

1/-/-/10

product: video set ▪ screen size: 7" ▪ lock control ▪ power supply for the screen: 12 V / 2 A DC (included) ▪ monitor size: 179 × 126 × 18 mm ▪ dimensions of the camera unit: 155 × 55 × 40 mm ▪ camera viewing angle: 120° ▪ packaging: 1 pc, box ▪ voice communication: two-way





HD Resolution 720p | 2 way audio | Door/Gate control | Night vision | IR CUT Day/Night | Weather proof | 4+2 Wires | EASY TO INSTALL

8 592920 160534

H2020 30 10 002 020

1/-/-/8

NEW

Accessories for videophones

- electric door openers are part of security systems
- RFID key fobs for easier access for authorized persons
- after access approval, the door lock opens automatically

H8013 1/100/-/700

30 80 000 013

8 595025 385802



product: RF tag ▪ dimensions: 28 × 7 mm ▪ packaging: 1 pc, packet ▪ frequency: 125 kHz

H7009 1/-/-/50

30 70 000 009

8 592920 110584



max. output total: 12 V/5 A ▪ input voltage: 100–240 V~, 47–63 Hz ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 12 V DC ▪ output current: max. 5 000 mA ▪ power supply type: no cable ▪ dimensions: 77 × 55 × 92 mm ▪ packaging: 1 pc, paper box

C0030 1/-/-/12

28 04 000 030

8 592920 128886





product: door lock ▪ type: EM-0280A ▪ power supply: 12 V DC (not included) ▪ dimensions: 250 × 25 × 32 mm ▪ packaging: 1 pc, box

C0025 1/-/-/30

28 04 000 014

4 042203 778306



product: lock ▪ type: with a time pin, after the electric impulse position OPENED, after passing through the door position CLOSED ▪ power supply: 12 V AC/DC (not included) ▪ dimensions: 25 × 28 × 250 mm ▪ packaging: 1 pc, box

C0024 1/-/-/30

28 04 000 013

4 042203 778382



product: lock ▪ type: with mechanical unblocking for constant entry - OPEN position ▪ power supply: 12 V AC/DC (not included) ▪ dimensions: 25 × 28 × 250 mm ▪ packaging: 1 pc, box

Cameras, Surveillance

Cameras GoSmart

EMOS GoSmart

- enhanced security for people and property
- monitoring of indoor and outdoor areas
- real-time motion alerts
- two-way audio communication
- automatic recording upon motion detection
- connection to the home network via WiFi protocol
- compatible with EMOS GoSmart products and TUYA devices
- voice control support via Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 180°
- IP rating: IP21
- camera resolution: 2 560 × 1 440
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz/5 GHz Dual Band
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 m
- human body recognition





Wi Fi DUAL 2.4/5 GHz | 4MPx resolution | Night vision | Pan and tilt | Motion detection | Motion tracking | Sound detection | 2 way audio | Micro SD max. 256 GB

8 592920 160510

H4072 | 30 24 040 720 | 1/-/-/18 | NEW

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 180°
- IP rating: IP21
- camera resolution: 2 560 × 1 440
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz/5 GHz Dual Band
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 m
- human body recognition





Wi Fi DUAL 2.4/5 GHz | 4MPx resolution | Night vision | Pan and tilt | Motion detection | Motion tracking | Sound detection | 2 way audio | Micro SD max. 256 GB

8 592920 147061

H4062 | 30 24 040 620 | 1/-/-/18

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 2 304 × 1 296
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 m
- human body recognition





Wi Fi | 2K QUAD HD Resolution 3MP | Night vision | 100° | Pan and tilt | Motion detection | Cry alert | Lullaby | 2 way audio | Night light

8 592920 118146

H4052 | 30 24 040 520 | 1/-/-/6 | SALE

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 135°
- IP rating: IP44
- camera resolution: 2 880 × 1 620
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 135°
- motion detection range: 9 m
- human body recognition
- animal recognition




Wi Fi | 5MPx Resolution | Rechargeable 9 200 mAh | Solar charging | Night vision | 135° | Motion detection | Motion tracking | Advanced detection | IP44

8 592920 156438

H4067 30 24 040 670 — 1/-/-/9 — NEW

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 135°
- IP rating: IP44
- camera resolution: 2 880 × 1 620
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 135°
- motion detection range: 9 m
- human body recognition
- animal recognition




Wi Fi | 5MPx Resolution | Rechargeable 9 200 mAh | Solar charging | Night vision | 135° | Motion detection | Motion tracking | Advanced detection | IP44

8 592920 161401

H4167 30 24 041 670 — 1/-/-/9 — NEW

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 135°
- IP rating: IP44
- camera resolution: 2 880 × 1 620
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 135°
- motion detection range: 9 m
- human body recognition




Wi Fi | 5MPx Resolution | Rechargeable 5 200 mAh | Solar charging | Night vision | 135° | Advanced detection | IP44 | 2 way audio | Micro SD max. 256 GB

8 592920 156452

H4073 30 24 040 730 — 1/-/-/12 — NEW

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 135°
- IP rating: IP44
- camera resolution: 2 880 × 1 620
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 135°
- motion detection range: 9 m
- human body recognition
- animal recognition




Wi Fi | 5MPx Resolution | Rechargeable 5 200 mAh | Solar charging | Night vision | 135° | Advanced detection | IP44 | 2 way audio | Micro SD max. 256 GB

8 592920 161432

H4173 30 24 041 730 — 1/-/-/12 — NEW

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 135°
- IP rating: IP44
- camera resolution: 2 560 × 1 440
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: 4G, LTE
- transmission frequency: LTE
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 110°
- motion detection range: 8 m
- human body recognition
- animal recognition




Wi Fi | 4MPx resolution | Rechargeable 9 200 mAh | Solar charging | Night vision | 135° | Motion detection | Advanced detection | Motion tracking | 2 way audio

8 592920 161418

H4168 30 24 041 680 — 1/-/-/9 — NEW

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- automatic image saving
- night vision
- camera viewing angle: 110°
- IP rating: IP44
- camera resolution: 2 048 × 1 536
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi + Bluetooth
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 120°
- motion detection range: 10 m
- human body recognition





Wi Fi | 3MPx Resolution | Rechargeable 8 800 mAh | FULL HD Resolution 1 080p | Night vision | 110° | Motion detection | 2 way audio | Solar charging | Siren 105 dB

8 592920 117743

H4056 30 24 040 560 | 1/-/-/5

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 130°
- IP rating: IP44
- camera resolution: 2 560 × 1 440
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 120°
- motion detection range: 8 m
- human body recognition
- animal recognition





Wi Fi | 4MPx resolution | Rechargeable 5 200 mAh | Solar charging | Night vision | 130° | PIR sensor | Sensor | 2 way audio | 350 lm

8 592920 161425

H4170 30 24 041 700 | 1/-/-/10 | NEW

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 110°
- IP rating: IP44
- camera resolution: 2 560 × 1 440
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz/5 GHz Dual Band
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 m
- human body recognition





Wi Fi DUAL 2.4/5 GHz | 4MPx resolution | IN 100–240 V | E27 | Night vision | 110° | Pan and tilt | Siren 120 dB | IP44 | Outdoor

8 592920 156469

H4074 30 24 040 740 | 1/-/-/2 | NEW

Cameras, Surveillance

Alarms

Alarms GoSmart

EMOS GoSmart

- property protection against unauthorized entry
- intelligent motion detection
- control and notifications via mobile application
- easy installation and flexible power supply
- connection to the home network via WiFi protocol
- compatible with EMOS GoSmart products and TUYA devices
- voice control support via Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

- product: alarm
- detection angle: 110°
- detection distance: 8 m
- switching time: 5 s, 30 s, 1 min, 3 min, 5 min
- IP rating: IP21
- sensor type: PIR
- power source: DC USB 5 V / 3× AA
- packaging: 1 pc, paper box
- supported OS: Android, iOS

- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi, RF
- transmission frequency: 2.4 GHz WIFI (IEEE802.11b/
- notifications to the mobile app





Wi Fi | 125 dB | Welcome Chime | Dual power | Remote control | Motion detection | Adjustable Volume | SOS Button | PIR Sensor | Real time notifications

8 592920 147009

H5030 | 1/-/-/12

30 69 050 300 | NEW

Alarms

- reliable protection of property against unauthorized entry
- motion detection in scaned area
- remote control with activation, deactivation and SOS functions
- loud siren to deter intruders and alert the surroundings
- easy installation, ideal for homes and offices

- product: alarm
- detection angle: 110°
- detection distance: 8 m
- IP rating: IP21
- sensor type: PIR
- power source: DC USB 5 V / 3× AA
- packaging: 1 pc, paper box
- protocol: RF





125 dB | Welcome Chime | Dual power | Remote control | Motion detection | Adjustable Volume | SOS Button | PIR Sensor

8 592920 146989

H8106 | 1/-/-/24

30 81 000 010 | NEW

Doorbells

Wireless doorbells GoSmart

EMOS GoSmart

- overview of ringing via notifications on a mobile phone
- automatic pairing
- expandability to 2 outdoor buttons for flexible placement
- volume control, visual indication and a wide selection of melodies
- convenient setup and control via mobile app
- option to integrate into home automation systems
- connection to the home network via WiFi
- compatible with EMOS GoSmart products and TUYA devices

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store Google Play

- reach of the button: 150 m
- number of melodies: 52
- pairing method: automatic pairing–self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8 + 2 v APP
- number of buttons in a package: 1 pc
- extra (spare) button: P5734T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





Wi Fi | 110 dB | 150 m | 52× | Water resistance | 433.92 MHz | Real time notifications | 230 V AC | 1× 3 V CR2032 included

8 592920 135433

P5735WS 1/-/-/32

34 02 127 000

- reach of the button: 150 m
- number of melodies: 52
- pairing method: automatic pairing–self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8 + 2 v APP
- number of buttons in a package: 1 pc
- extra (spare) button: P5734T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





Wi Fi | 110 dB | 150 m | 52× | Water resistance | 433.92 MHz | Real time notifications | 230 V AC | 1× 3 V CR2032 included

8 592920 135488

P5735SS 1/-/-/32

34 02 128 000

Wireless doorbells

- EMOS doorbells feature a plug-in or battery-powered receiver
- doorbells can be paired easily in just a few seconds
- new models with signal repeater – unlimited range
- with 1 or 2 waterproof buttons, option to add more buttons
- volume control, visual indication and a wide selection of melodies

reach of the button: 150 m ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 95 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5750T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC





8 592920 096963

P5750 1/-/-/30

34 02 118 000

reach of the button: 150 m ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 95 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 2 pcs ▪ extra (spare) button: P5750T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC





8 592920 096987

P5750.2T 1/-/-/30

34 02 119 000

reach of the button: 150 m ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 95 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5750T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 2 pcs ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC





8 592920 096949

P5750.2R 1/-/-/30

34 02 120 000

reach of the button: 180 m ▪ number of melodies: 16 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 85 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5760T ▪ waterproof button: IP44 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC





8 592920 140932

P5760N 1/-/-/18

34 02 060 011

reach of the button: 180 m ▪ number of melodies: 16 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 85 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5760T ▪ waterproof button: IP44 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 3× 1.5 V AA (not included)







8 592920 140963

P5763N 1/-/-/24

34 02 060 012

---

reach of the button: 180 m ▪ number of melodies: 16 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 85 dB ▪ option to add another button: yes, max. 8 ▪ extra (spare) button: P5760T ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 3× 1.5 V AA (not included)







8 592920 140994

P5763RN 1/-/-/36

34 02 063 002

---

reach of the button: 150 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5723T ▪ waterproof button: IP55 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC







8 592920 147573

P5737 1/-/-/24

34 02 131 000

---

reach of the button: 150 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5723T ▪ waterproof button: IP55 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 3× 1.5 V AA (not included)







8 592920 147566

P5736 1/-/-/24

34 02 130 000

---

reach of the button: 150 m ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 85 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5734T ▪ waterproof button: IP56 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC







8 592920 112809

P5734B 1/-/-/32

34 02 126 000

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

reach of the button: 150 m ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 85 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5734T ▪ waterproof button: IP56 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC



85 dB | 150 m | 10× | Water resistance | 230 V~ | 1× CR2032

8 592920 112793

P5734 1/-/-/32

34 02 125 000

---

reach of the button: 150 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 110 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5732T ▪ waterproof button: IP44 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC



110 dB | 150 m | 36× | Water resistance | 230 V~ | 1× CR2032

8 592920 105962

P5733W 1/-/-/32

34 02 122 000

---

reach of the button: 150 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 110 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5732T ▪ waterproof button: IP44 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC



110 dB | 150 m | 36× | Water resistance | 230 V~ | 1× CR2032

8 592920 105986

P5733S 1/-/-/32

34 02 123 000

---

reach of the button: 150 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 110 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5732T ▪ waterproof button: IP44 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC



110 dB | 150 m | 36× | Water resistance | 230 V~ | 1× CR2032

8 592920 106006

P5733G 1/-/-/32

34 02 124 000

---

reach of the button: 180 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 6 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5729T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 2 pcs ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC



90 dB | 180 m | 36× | Water resistance | 230 V~

8 592920 084304

P5731 1/-/-/36

34 02 116 000

reach of the button: 180 m ▪ number of melodies: 52 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 6 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5728T ▪ waterproof button: IP56 ▪ power button: 1× 12 V A23 (included) ▪ number of receivers in a package: 2 pcs ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 3× 1.5 V AAA (not included)





8 592920 084281

P5730 1/-/-/24
34 02 115 000

---

reach of the button: 180 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 6 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5729T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC





8 592920 105948

P5729B 1/-/-/32
34 02 121 000

---

reach of the button: 180 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 6 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5729T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC





8 592920 080405

P5729 1/-/-/32
34 02 044 000

---

reach of the button: 180 m ▪ number of melodies: 52 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 6 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5728T ▪ waterproof button: IP56 ▪ power button: 1× 12 V A23 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 3× 1.5 V AAA (not included)





8 592920 080382

P5728 1/-/-/32
34 02 043 000

---

reach of the button: 150 m ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 100 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5734T ▪ waterproof button: IP56 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC





8 592920 153604

P5727N 1/-/-/42
34 02 132 000
NEW

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

reach of the button: 100 m ▪ number of melodies: 36 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the button ▪ maximum ringing volume: 75 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5723T ▪ waterproof button: IP44 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ power supply of the main unit: 3× 1.5 V AA (not included)







8 592920 006641

P5723 1/-/-/20

34 02 107 000

---

reach of the button: 180 m or wiring connection ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5734T; P57000T ▪ waterproof button: IP54 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC







8 592920 145555

P57103 1/-/-/24

34 02 129 000

---

reach of the button: 150 m ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 100 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5734T ▪ waterproof button: IP56 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 5 levels ▪ power supply of the main unit: 230 V AC







8 592920 153970

P57U01 1/-/-/42

34 02 133 000

NEW

---

reach of the button: 150 m ▪ number of melodies: 38 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 100 dB ▪ option to add another button: yes, max. 6 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5739T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC







8 592920 153932

P5739W 1/-/-/48

34 02 134 000

NEW

---

reach of the button: 150 m ▪ number of melodies: 38 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 100 dB ▪ option to add another button: yes, max. 6 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5739T ▪ waterproof button: IP44 ▪ power button: unpowered ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC







8 592920 153949

P5739B 1/-/-/48

34 02 135 000

NEW

www.emos.eu | Order Code Item Number | Packaging Type

reach of the button: 150 m ▪ number of melodies: 38 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ power button: 3× 1.5 V AAA (not included) + USB-C 5 V ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC





8 592920 153956

P57P01 1/-/-/48

34 02 136 000 NEW

reach of the button: 150 m ▪ number of melodies: 38 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the doorbell ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ power button: 3× 1.5 V AAA (not included) + USB-C 5 V ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 3× 1.5 V AAA (not included) + USB-C 5 V





8 592920 153963

P57P02 1/-/-/48

34 02 137 000 NEW

Spare push buttons

- replacement or additional buttons for EMOS doorbells
- specific models are compatible with specific doorbell types
- usually powered by a single battery, waterproof (IP44 rating)

power source: 1× 3 V CR2032 (included) ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 120 m ▪ IP rating: IP44 ▪ designed for the type of bell: P5760N, P5763N, P5763RN, P5760, P5763, P5763R





8 592920 057605

P5760T 1/-/5/40

34 02 060 002

power source: unpowered ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 150 m ▪ IP rating: IP55 ▪ designed for the type of bell: P5750, P5750.2T, P5750.2R





8 592920 097007

P5750T 1/-/-/42

34 02 118 001

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

power source: 1× 3 V CR2032 (included) ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 150 m ▪ IP rating: IP56 ▪ designed for the type of bell: P5734, P5734B, P5735SS, P5735WS, P5727N





150 m | Water resistance | 1× CR2032

8 592920 112816

P5734T 1/-/-/42

34 02 126 001

---

power source: 1× 3 V CR2032 (included) ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 100 m ▪ IP rating: IP44 ▪ designed for the type of bell: P5732, P5733W, P5733S, P5733G





100 m | Water resistance | 1× CR2032

8 592920 087817

P5732T 1/-/-/42

34 02 117 001

---

power source: unpowered ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 180 m ▪ IP rating: IP44 ▪ designed for the type of bell: P5729, P5729B, P5731





180 m | Water resistance

8 592920 080429

P5729T 1/-/-/42

34 02 114 000

---

power source: 1× 12 V A23 (included) ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 180 m ▪ IP rating: IP56 ▪ designed for the type of bell: P5728, P5730





180 m | Water resistance | 1× A23

8 592920 080412

P5728T 1/-/-/42

34 02 113 000

---

power source: 1× 3 V CR2032 (included) ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 100 m ▪ IP rating: IP44 ▪ designed for the type of bell: 98103, 98098, 98105, 98080S, P5736, P5737





100 m | Water resistance | 1× CR2032

8 592920 006658

P5723T 1/-/-/48

34 02 108 000

www.emos.eu | Order Code Item Number | Packaging Type

power source: max. 24 V DC ▪ IP rating: IP44 ▪ designed for the type of bell: P57101, P57102, P57104





Water resistance | 8/12/24 V

8 592920 140642

P57000T | 1/-/-/112

34 01 570 001

power source: unpowered ▪ pairing method: self-learning (automatic pairing) ▪ range in open space: up to 150 m ▪ IP rating: IP44 ▪ designed for the type of bell: P5739W, P5739B





150 m | Water resistance

8 592920 154120

P5739T | 1/-/-/42

34 02 138 000

NEW

Wired doorbells

- classic mechanical doorbells with a single melody
- distance between the doorbell and the button tailored exactly to the user's needs
- continuously operational thanks to 230 V power supply or transformer

reach of the button: wiring connection ▪ number of melodies: 1 ▪ maximum ringing volume: 85 dB ▪ extra (spare) button: P57000T ▪ power button: wiring connection ▪ number of receivers in a package: 1 pc ▪ power supply of the main unit: 4×1.5V AA/transformer (all not included)





85 dB | Mechanical 1× | 4× AA 1.5 V | 8/12/24 V

8 592920 140666

P57102 | 1/-/-/15

34 01 571 020

reach of the button: wiring connection ▪ number of melodies: 1 ▪ maximum ringing volume: 85 dB ▪ extra (spare) button: P57000T ▪ power button: wiring connection ▪ number of receivers in a package: 1 pc ▪ power supply of the main unit: 4×1.5V AA/transformer (all not included)





85 dB | Mechanical 1× | 4× AA 1.5 V | 8/12/24 V

8 592920 140659

P57101 | 1/-/-/15

34 01 571 010

reach of the button: wiring connection ▪ number of melodies: 1 ▪ maximum ringing volume: 85 dB ▪ power button: wiring connection ▪ number of receivers in a package: 1 pc ▪ power supply of the main unit: 230 V AC






8 592920 119433

P57002 1/-/-/18
34 01 000 020

---

reach of the button: wiring connection ▪ number of melodies: 1 ▪ maximum ringing volume: 85 dB ▪ power button: wiring connection ▪ number of receivers in a package: 1 pc ▪ power supply of the main unit: 230 V AC






8 592920 119426

P57001 1/-/-/18
34 01 000 010

---

input voltage: 230 V~, 50/60 Hz ▪ designed for: wired doorbells ▪ output voltage: 8 V, 12 V, 24 V ▪ output current: 0.3 A (8 W) ▪ dimensions: 85 × 64 × 35 mm ▪ packaging: 1 pc, box






8 592920 140635

P57000TR 1/-/-/20
34 01 570 000

---

reach of the button: 180 m or wiring connection ▪ number of melodies: 10 ▪ pairing method: automatic pairing–self-learning ▪ optical signaling on the button ▪ maximum ringing volume: 90 dB ▪ option to add another button: yes, max. 8 ▪ number of buttons in a package: 1 pc ▪ extra (spare) button: P5734T; P57000T ▪ waterproof button: IP54 ▪ power button: 1× 3 V CR2032 (included) ▪ number of receivers in a package: 1 pc ▪ volume control: yes, 4 levels ▪ power supply of the main unit: 230 V AC






8 592920 145555

P57103 1/-/-/24
34 02 129 000

---

reach of the button: wiring connection ▪ number of melodies: 1 ▪ maximum ringing volume: 90 dB ▪ extra (spare) button: P57000T ▪ power button: wiring connection ▪ number of receivers in a package: 1 pc ▪ power supply of the main unit: 12V AC






8 592920 153925

P57104 1/-/24/48
34 01 571 040
NEW

Accessories GoSmart

EMOS GoSmart

- access control via mobile application
- integration into the smart home system
- unlocking via code or chip
- connection to the home network via WiFi protocol
- compatible with EMOS GoSmart products and TUYA devices
- voice control support via Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

- product: keyboard RFID, TUYA
- number of switching relays: 1
- number of codes: up to 1 000
- power source: 12–24 V DC (not included)
- dimensions: 23 × 78 × 115 mm
- packaging: 1 pc, box
- frequency: 125 kHz
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- cloud storage





Wi Fi · IP68 · Antivandal body · Remote unlock · Attendance log · Open/close log · Password unlock · Bell button · 12 V DC · 2000 users

8 592920 128862

H5023 1/-/-/18

30 69 050 230

Multimeters, testers

Multimeters and testers form a reliable and indispensable range for electrical installations, servicing and maintenance.





The portfolio includes digital multimeters, non-contact voltage testers and other instruments for diagnosing electrical circuits. Selected products enable the measurement of voltage, current, resistance and other parameters and are equipped with features for safe use. Emphasis is placed on clear displays, robust construction and reliable operation in various working conditions.

The breadth of the range covers everything from basic checks to more demanding measurements in professional applications.





Making Life Easy

Multimeters, testers



Multimeters, measuring cables

- multimeters measure electrical quantities – voltage, etc.
- automatic or manual measurement range selection
- also measure temperature and allow diode or transistor tests
- clamp multimeter for higher values, w/o circuit interruption
- plus spare measuring leads with tips, for any multimeter

AC voltage: 200–600 V ▪ AC current: 200 mA – 10 A ▪ DC voltage: 2–600 V ▪ DC current: 200 mA – 10 A ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ circuit continuity ▪ diode test ▪ battery test: 1.5 V/9 V ▪ temperature measurement: -40 °C to +300 °C ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips, temperature probe ▪ power source: 3× 1.5 V AAA (included) ▪ dimensions: 35 × 75 × 155 mm





Function | °C/°F | Continuity beeper | Data hold

8 592920 156230

M0230N 1/-/-/16

22 02 022 000

AC voltage: 600 mV – 750 V ▪ AC current: 600 µA–10 A ▪ DC voltage: 600 mV – 1 000 V ▪ DC current: 600 µA–10 A ▪ screen display: 5 3/4 digit ▪ backlight display ▪ range selection: both automatic and manual ▪ electrical resistance: 600 Ohm – 60 MOhm ▪ circuit continuity ▪ diode test ▪ transistor test ▪ temperature measurement: -40 °C to +300 °C ▪ max. value hold ▪ Data hold mode ▪ auto power off ▪ included: battery, measurement tips, reduction for measuring transistors, temperature probe type K ▪ power source: 1× 9 V (included) ▪ dimensions: 35 × 90 × 190 mm





Function | °C/°F | Continuity beeper | Data hold

8 592920 156254

M0430N 1/-/-/10

22 02 023 000

AC voltage: 2–600 V ▪ AC current: 200 µA – 200 mA ▪ DC voltage: 200 mV – 600 V ▪ DC current: 200 µA – 200 mA ▪ screen display: 3 1/2 digit ▪ backlight display ▪ range selection: automatic ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ max. value hold ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 44 × 38 × 230 mm





Function | Continuity beeper | Data hold

8 592920 155592

M3216N 1/-/-/24

22 02 024 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

AC voltage: 200–300 V ▪ DC voltage: 200 mV – 300 V ▪ DC current: 20 mA – 10 A ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ circuit continuity ▪ diode test ▪ battery test ▪ Data hold mode ▪ included: battery, manual, measurement tips ▪ power source: 1× 9 V (included) ▪ dimensions: 150 × 75 × 35 mm





Function | Continuity beeper | Data hold

8 592920 155615

M3620N 1/-/-/18

22 02 025 000

AC voltage: 200 mV – 300 V ▪ AC current: 20 mA – 10 A ▪ DC voltage: 200 mV – 300 V ▪ DC current: 20 mA – 10 A ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: manual ▪ non-contact AC voltage detection ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ battery test ▪ temperature measurement: 0 °C to +1 000 °C ▪ Data hold mode ▪ included: battery, manual, measurement tips ▪ power source: 1× 9 V (included) ▪ dimensions: 168 × 83 × 35 mm





Function | °C | Continuity beeper | Data hold

8 592920 155639

M3691N 1/-/-/12

22 02 026 000

AC voltage: 2–600 V ▪ AC current: 2–600 A ▪ DC voltage: 200 mV – 600 V ▪ clamp multimeter ▪ screen display: 3.5 digit ▪ range selection: automatic ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips ▪ power source: 2× 3 V CR2032 (included) ▪ dimensions: 36 × 76 × 190 mm





Function | Continuity beeper | Data hold

8 592920 155653

M0305N 1/-/-/18

22 02 027 000

AC voltage: 4–600 V ▪ AC current: 400 A ▪ DC voltage: 400 mV – 600 V ▪ DC current: 400 A ▪ clamp multimeter ▪ screen display: 3 3/4 digit ▪ range selection: automatic ▪ electrical resistance: 400 Ohm – 40 MOhm ▪ circuit continuity ▪ diode test ▪ temperature measurement: -20 °C to +1 000 °C ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 38 × 71 × 194 mm





Function | Continuity beeper | Data hold

8 592920 155677

M0400N 1/-/-/12

22 02 028 000

AC voltage: 200–300 V ▪ DC voltage: 200 mV – 300 V ▪ DC current: 2 000 µA – 200 mA ▪ screen display: 3.5 digit ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ diode test ▪ battery test: 1.5 V/9 V ▪ included: battery, manual, measurement tips ▪ power source: 1× 12 V (included) ▪ dimensions: 30 × 57 × 95 mm





Function

8 592920 155691

M0320N 1/-/-/32

22 02 029 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

AC voltage: 200–300 V ▪ DC voltage: 200 mV – 300 V ▪ DC current: 20 µA – 10 A ▪ screen display: 3.5 digit ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ circuit continuity ▪ diode test ▪ included: battery, manual, measurement tips, protective case ▪ power source: 1× 9 V (included) ▪ dimensions: 27 × 70 × 135 mm





Function | Continuity beeper

8 592920 155714

M0391N
22 02 030 000

1/-/-/24

AC voltage: 2–300 V ▪ AC current: 200 µA – 10 A / with pliers up to 1 000 A (not included) ▪ DC voltage: 200 mV – 300 V ▪ DC current: 200 µA – 10 A / with pliers up to 1 000 A (not included) ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: automatic ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ transistor test ▪ temperature measurement: -20 °C to +1 000 °C ▪ max. value hold ▪ Data hold mode ▪ auto power off ▪ included: battery, test leads, reduction for measuring transistors, temp. probe type K, lock the battery cover ▪ power source: 3× 1.5 V AAA (included) ▪ dimensions: 35 × 75 × 158 mm





Function | °C/°F | Continuity beeper | Data hold

8 592920 155738

M0420N
22 02 031 000

1/-/-/12

AC voltage: 2–600 V ▪ AC current: 2 mA – 10 A ▪ DC voltage: 200 mV – 600 V ▪ DC current: 2 mA – 10 A ▪ screen display: 3.5 digit ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ transistor test ▪ included: battery, manual, measurement tips ▪ power source: 1× 9 V (included) ▪ dimensions: 32 × 85 × 165 mm





Function | Continuity beeper

8 592920 154199

M2092N
22 02 032 000

1/-/5/20

---

cable length: 95 cm ▪ maximum load: 1 A, 30 V AC, 60 V DC ▪ possibility to tips exchange ▪ colour: red, black ▪ packaging: 1 pc, small box





max. 30 V~ 60 V ⎓ | 1 A | 0.95 m

8 592920 155059

S4001R
23 04 000 400

1/-/-/80

---

cable length: 95 cm ▪ maximum load: 10 A, 1 kV, CAT III ▪ colour: red, black ▪ packaging: 1 pc, small box





1 000 V max. | 10 A | 0.95 m

8 592920 155776

S4003N
23 04 000 500

1/-/-/40

Testers

- voltage tester for measuring voltage value
- also identifies phases, sequence and polarity
- detects DC and AC voltage, contact or non-contact
- results indicated optically and acoustically

DC voltage: 0 to 250 V contactless ▪ AC voltage: 70 to 250 V contactless ▪ AC/DC voltage: 0–250 V, 70–250 V ▪ polarity indication ▪ non-contact measuring: polarity of sources and short-circuit, microwave ovens monitors emission ▪ signalization: optical ▪ power source: 2× 1.5 V LR41 (included) ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, header card





Function | Signalization

8 592920 154311

M0018N 1/-/24/96

22 01 020 000

---

designed for battery type: AAA, AA, C, D,9 V and for button cells 1.5 V, 3 V ▪ type: UNI D3 ▪ value of load resistance for the AA, AAA, C, D, 9 V: universal ▪ the value of load resistance for button batteries: universal ▪ dimensions: 110 × 60 × 25 mm





8 592920 016688

N0322 1/-/5/50

22 03 003 000

DC voltage: 0 to 250 V contactless ▪ AC voltage: 70 to 250 V contactless ▪ AC/DC voltage: 0–250 V, 70–250 V ▪ polarity indication ▪ non-contact measuring: polarity of sources and short-circuit, microwave ovens monitors emission ▪ two settings of sensitivity ▪ signalization: optical + acoustic ▪ power source: 2× 1.5 V LR44 (included) ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, box





Function | Signalization

8 592920 154342

M0048N 1/-/12/72

22 01 021 000

DC voltage: 12–690 V ▪ AC voltage: 12–690 V ▪ AC/DC voltage: 12 V, 24 V, 50 V, 120 V, 230 V, 400 V, 690 V ▪ polarity indication ▪ phase indication ▪ signalization: optical + acoustic ▪ power source: 9 V (included) ▪ frequency range: 0–60 Hz ▪ measuring of connections of circuits ▪ packaging: 1 pc, box





Function | Signalization | Continuity beeper | Phase rotary

8 592920 154373

M0012AN 1/-/9/36

22 01 022 000

EMOS A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

DC voltage: 110–400 V ▪ AC voltage: 110–400 V ▪ AC/DC voltage: 110 V, 230 V, 400 V ▪ polarity indication ▪ phase indication ▪ signalization: optical ▪ power source: from power source ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, box





Function | Signalization | Phase rotary

8 592920 154403

M0014AN
22 01 023 000

1/-/9/36

DC voltage: 6–400 V ▪ AC voltage: 6–400 V ▪ AC/DC voltage: 6 V, 12 V, 24 V, 50 V, 120 V, 230 V, 400 V ▪ polarity indication ▪ signalization: optical ▪ power source: from power source ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, box





Function | Signalization

8 592920 156278

M0003BN
22 01 024 000

1/-/-/40

DC voltage: 0–250 V ▪ AC voltage: 200–250 V ▪ AC/DC voltage: 0–250 V ▪ signalization: optical ▪ power source: from power source ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, header card





Function | Signalization

8 592920 136126

M0017
22 01 018 000

1/-/12/108

DC voltage: 6–690 V ▪ AC voltage: 6–690 V ▪ AC/DC voltage: 6 V, 12 V, 24 V, 50 V, 120 V, 230 V, 400 V, 690 V ▪ polarity indication ▪ phase indication ▪ signalization: optical + acoustic ▪ power source: 2× 1.5 V AAA (included) ▪ frequency range: 45–65 Hz ▪ measuring of connections of circuits ▪ packaging: 1 pc, box





Function | Signalization | Continuity beeper | Phase rotary

8 592920 155578

M0071N
22 01 025 000

1/-/-/12

DC voltage: 0–250 V ▪ AC voltage: 200–250 V ▪ AC/DC voltage: 0–250 V ▪ signalization: optical ▪ power source: from power source ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, header card





Function | Signalization

8 592920 136119

M0016
22 01 017 000

1/-/12/96

detection: AC wiring ▪ signalization: optical + acustic ▪ AC voltage: 70–1 000 V ▪ dimensions: 153 × 22 mm ▪ power source: 2× 1.5 V AAA (included) ▪ packaging: 1 pc, box







8 592920 155752

M0007AN
22 05 000 020

1/-/-/50

DC voltage: 12–250 V ▪ AC voltage: 12–230 V ▪ AC/DC voltage: 12–250 V ▪ non-contact measuring ▪ signalization: optical ▪ power source: from power source ▪ frequency range: 50–500 Hz ▪ packaging: 1 pc, header card







8 592920 159088

M0049N
22 01 026 000

1/-/24/96

NEW

Measuring instruments

- multidetector maps electrical wiring – no more drilled wires
- the laser distance meter is designed for measuring distances and calculating areas and volumes
- infrared digital thermometer for measuring various surfaces temperatures across various materials

---

measuring distance: 0.05–40 m ▪ measuring functions: length, surface, volume, continual measurement, Pythagoras ▪ measuring units: m, ft, in, m², ft², m³, ft³ ▪ power source: 2× 1.5 V AAA (not included) ▪ packaging: 1 pc, small box







8 592920 037546

M0502
22 06 000 020

1/-/-/50

---

measuring functions: temperature ▪ measuring units: °C/°F ▪ temperature range: -50 °C to 550 °C ▪ power source: 2× 1.5 V AAA (included) ▪ packaging: 1 pc, small box







8 592920 152805

M0503N
22 06 000 040

1/-/-/50

	www.emos.eu	Order Code Item Number	Packaging Type

detection: wood, metal, AC wiring ▪ signalization: optical + acustic ▪ dimensions: 28 × 72 × 155 mm ▪ power source: 1× 9 V (included) ▪ packaging: 1 pc, box







8 592920 156216

M0501N

22 06 000 050

1/-/-/20

Thermostats, CO and smoke alarms



Thermostats

Thermostats GoSmart

EMOS GoSmart

- reduce heating/cooling costs for buildings
- individual temperature settings for different rooms
- set temperature scenarios for specific day and time
- control all settings from anywhere using the app
- heating or air conditioning control based on GPS location
- connection via WiFi or Zigbee protocols
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

thermostat type: wireless with OpenTherm communication ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power of transmitter: 5 V USB adapter (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 115 × 37 × 91 mm ▪ transmitter's dimension: 98 × 55 × 98 mm



Wi Fi | Regulation based on GPS | Temperature calibration | Touch button control | Energy saving | Backlit display | 7–30 °C | Heating /Cooling | 868 MHz | 16 A/5 A

8 592920 149133

P56S11 1/-/-/8

21 01 310 000

thermostat type: wired with OpenTherm communication + underfloor heating ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power source: 230 V AC ▪ dimensions: 98 × 37 × 98 mm



Wi Fi | Regulation based on GPS | Room & floor sensor | Temperature calibration | Touch button control | Energy saving | Backlit display | 7–30 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 149140

P56S01 1/-/-/16

21 01 213 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermostat type: wired with OpenTherm communication + underfloor heating, cocealed ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power source: 230 V AC ▪ dimensions: 98 × 37 × 98 mm




Wi Fi | Regulation based on GPS | Room & floor sensor | Temperature calibration | Touch button control | Energy saving | Backlit display | 7–30 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 149157

P56S01F
21 01 212 000

1/-/-/16

---

thermostat type: wireless ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 4 A inductive ▪ power of transmitter: 5 V USB adapter (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 86 × 86 mm ▪ transmitter's dimension: 40 × 138 × 96 mm




Wi Fi | 16 A/4 A | 100 m | Regulation based on GPS | Temperature calibration | Touch button control | Energy saving | Backlit display | 5–35 °C | Heating /Cooling

8 592920 117774

P56211
21 01 900 001

1/-/-/8

---

thermostat type: wire ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 230 V AC ▪ dimensions: 138 × 88 × 33 mm




Wi Fi | 6 A/2 A | Regulation based on GPS | Temperature calibration | Touch button control | Energy saving | Backlit display | 5–35 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 117767

P56201
21 01 900 000

1/-/-/24

---

thermostat type: wired for underfloor heating, concealed ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 95 °C, resolution 0.5 °C ▪ temperature adjustment: from 1 °C up to 70 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive ▪ power source: 230 V AC ▪ dimensions: 86 × 86 × 43 mm




Wi Fi | Regulation based on GPS | Room & floor sensor | Temperature calibration | Touch button control | Energy saving | 0–95 °C | Heating | 230 V~ 50 Hz

8 592920 117590

P56201UF
21 01 900 002

1/-/-/36

---

thermostat type: wired for underfloor heating, concealed ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 95 °C, resolution 0.5 °C ▪ temperature adjustment: from 1 °C up to 70 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive ▪ power source: 230 V AC ▪ dimensions: 86 × 86 × 43 mm




Wi Fi | 16 A | Regulation based on GPS | Temperature calibration | Touch button control | Room & floor sensor | Energy saving

8 592920 139233

P56201BUF
21 01 900 012

1/-/-/36

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermostat type: socket ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ control mode: heating and cooling system ▪ number of programs for thermostat: customisable temperature (6× per day) ▪ temperature measurement: 0 °C to 45 °C, resolution 0.1 °C ▪ number of programs for timer: 24 ▪ number of switching per day for timer: 24 ▪ function to change summer/winter time ▪ dimensions: 82 × 62 × 146 mm ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ control via voice assistants: yes (Amazon Alexa, Google Assistant) ▪ additional features: timer; power consumption meter





Wi Fi | 16 A/4 A | 5–40 °C | Heating /Cooling | Energy saving | Thermo & Timer | 230 V~ 50 Hz

8 592920 143940

P56601FR
21 06 000 300

1/-/-/18

---

thermo shut-off valve: SMART, programmable ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: 5 °C to 30 °C, resolution 0.5 °C ▪ anti-frost protection ▪ open window function ▪ child lock ▪ matrix: M30 × 1.5 mm ▪ enclosed adaptors: RAV, RA, RAVL, Giacomini, Caleffi, M28 × 1.5 mm ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 53 × 53 × 90.5 mm ▪ packaging: 1 pc, small box





ZigBee | Regulation based on GPS | Child lock | Open window function | Silent operation | Energy saving | 5–30 °C | 2× 1.5 V AA included

8 592920 153918

P5631S
21 01 900 017

1/-/8/32

NEW

---

thermostat type: socket ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ control mode: heating and cooling system ▪ number of programs for thermostat: customisable temperature (6× per day) ▪ temperature measurement: 0 °C to 45 °C, resolution 0.1 °C ▪ number of programs for timer: 24 ▪ number of switching per day for timer: 24 ▪ function to change summer/winter time ▪ dimensions: 82 × 62 × 146 mm ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ control via voice assistants: yes (Amazon Alexa, Google Assistant) ▪ additional features: timer; power consumption meter





8 592920 143971

P56601SH
21 06 000 400

1/-/-/18

Thermostats

- indoor thermostats regulate heating systems & cooling units
- manual and digital, with programmable heating cycle
- wireless, wired and clamp-on
- selected models with backlit display and freeze protection

---

thermostat type: wireless with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power of transmitter: 2× 1.5 V AA (included) or 5 V USB adapter (not included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 115 × 37 × 91 mm ▪ transmitter's dimension: 98 × 55 × 98 mm





PROGRAMMABLE | 16 A/5 A | 100 m | OpenTherm | Energy saving | 7–30 °C | Heating /Cooling | Wireless | 868 MHz

8 592920 149164

P56A11
21 01 311 000

1/-/-/8

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermostat type: wireless with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.2 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power of transmitter: 2× 1.5 V AA (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 115 × 91 mm ▪ transmitter's dimension: 23 × 97 × 122 mm



PROGRAMMABLE · 16 A/5 A · 100 m · OpenTherm · Energy saving · 7~30 °C · Heating /Cooling · Wireless · 868 MHz

8 592920 098028

P5611OT 1/-/-/12

21 01 309 000

---

thermostat type: wireless with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 10 A resistive, 4 A inductive ▪ power of transmitter: 2× 1.5 V AA (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 26 × 86 × 86 mm ▪ transmitter's dimension: 26 × 126 × 84 mm



PROGRAMMABLE · 10 A/4 A · 80 m · OpenTherm · Energy saving · 5~35 °C · Heating /Cooling · Wireless · 868 MHz

8 592920 089323

P5616OT 1/-/-/8

21 01 307 000

---

thermostat type: wireless ▪ type of control: manual indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 4 A inductive ▪ power of transmitter: 2× 1.5 V AA (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 87 × 37 × 87 mm ▪ transmitter's dimension: 93 × 67 × 109 mm



EASY CONTROL · EASY TO INSTALL · 16 A/4 A · 100 m · Energy saving · 5~35 °C · Heating /Cooling · Wireless · 868 MHz · 230 V~ 50 Hz

8 592920 157060

P5618 1/-/-/12

21 01 112 000

NEW

---

thermostat type: wireless ▪ type of control: manual electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 4 A inductive ▪ power of transmitter: 2× 1.5 V AAA (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 26 × 86 × 86 mm ▪ transmitter's dimension: 28 × 120 × 77 mm



EASY CONTROL · 16 A/4 A · 100 m · Energy saving · 5~35 °C · Heating /Cooling · Wireless · 2× AAA · 230 V~ 50 Hz

8 592920 064016

P5614 1/-/-/8

21 01 106 010

---

thermostat type: wired with OpenTherm communication + underfloor heating ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power source: 230 V AC ▪ dimensions: 98 × 37 × 98 mm



PROGRAMMABLE · 16 A/5 A · OpenTherm · Energy saving · Room & floor sensor · 7~30 °C · Heating /Cooling · 230 V~ 50 Hz · 2× 1.5 V AA included

8 592920 149171

P56A01 1/-/-/16

21 01 211 000

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

thermostat type: wired with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 8 A resistively, 2 A inductively ▪ power source: 2× 1.5 V AA (included) ▪ transmitter's dimension: 98 × 31 × 98 mm




PROGRAMMABLE | 8 A/2 A | OpenTherm | Energy saving | 7–30 °C | Heating /Cooling | 2× 1.5 V AA included

8 592920 149195

P56A02 1/-/-/16

21 01 214 000

---

thermostat type: wired with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 26 × 126 × 84 mm




PROGRAMMABLE | 6 A/2 A | OpenTherm | Energy saving | 5–35 °C | Heating /Cooling | 2× AA

8 592920 089354

P5606OT 1/-/-/24

21 01 208 000

---

thermostat type: wire ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 8 A resistively, 2 A inductively ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 26 × 120 × 78 mm




PROGRAMMABLE | 8 A/2 A | Energy saving | 5–35 °C | Heating /Cooling | 2× AAA

8 592920 103395

P5607 1/-/-/24

21 01 209 000

---

thermostat type: wire ▪ type of control: manual indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 93 × 28 × 93 mm




EASY CONTROL | 6 A/2 A | Energy saving | 5–35 °C | Heating /Cooling | 2× 1.5 V AA included

8 592920 157046

P5608 1/-/-/27

21 01 111 000

NEW

---

thermostat type: wire ▪ type of control: manual indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 8 A resistively, 2 A inductively ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 30 × 120 × 77 mm




EASY CONTROL | 8 A/2 A | Energy saving | 5–35 °C | Heating /Cooling | 2× AAA

8 592920 064030

P5604 1/-/-/24

21 01 106 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermostat type: wire ▪ type of control: manual indoor thermostat ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 1 °C ▪ temperature adjustment: from 5 °C up to 30 °C, after 1 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 40 × 93 × 86 mm





EASY CONTROL | 6 A/2 A | 5–30 °C | Heating /Cooling | Energy saving | 2× AA

8 592920 113523

P5603R 1/-/-/24

21 01 106 001

---

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ control mode: heating and cooling system ▪ temperature measurement: 0 °C to 90 °C ▪ temperature adjustment: 0 °C to 90 °C, resolution 5 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive, 4 A inductive ▪ power source: 230 V, 400 V AC ▪ dimensions: 38 × 54 × 105 mm





16 A/4 A | Energy saving | 0–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 021910

P5681 1/-/5/20

21 01 103 000

---

thermostat type: wire, capillary sensor thermostat ▪ type of control: manual thermostat ▪ control mode: heating and cooling system ▪ temperature measurement: 0 °C to 90 °C ▪ temperature adjustment: 0 °C to 90 °C, resolution 5 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive, 4 A inductive ▪ capillary sensor length: 1 m, Ø 7 mm ▪ power source: 230 V, 400 V AC ▪ dimensions: 38 × 54 × 105 mm





16 A/4 A | Energy saving | 0–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 021927

P5682 1/-/5/20

21 01 104 000

---

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ temperature adjustment type: manually ▪ temperature measurement: 5 °C to 80 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 80 °C, after 0.1 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 5 A resistively, 1.5 A inductively ▪ power source: 230 V AC ▪ dimensions: 41 × 50 × 138 mm





5 A/1.5 A | LED indication | Energy saving | 5–80 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 088302

P5683 1/-/5/30

21 01 107 000

---

thermostat type: wire, capillary sensor thermostat ▪ type of control: manual thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ temperature adjustment type: manually ▪ temperature measurement: 5 °C to 90 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 90 °C, after 0.1 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 5 A resistively, 1.5 A inductively ▪ capillary sensor length: 0.9 m, Ø 6 mm ▪ power source: 230 V AC ▪ dimensions: 36 × 45 × 138 mm





5 A/1.5 A | LED indication | Energy saving | 5–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 088333

P5684 1/-/5/30

21 01 108 000

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ control mode: heating and cooling system ▪ temperature measurement: 0 °C to 90 °C ▪ temperature adjustment: 0 °C to 90 °C, resolution 5 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive, 4 A inductive ▪ power source: 230 V, 400 V AC ▪ dimensions: 57 × 38 × 108 mm, thermowell: 110 mm, Ø 8 mm, 1/2'' thread





16 A/4 A | Energy saving | 0–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 120934

P5685 1/-/5/15

21 01 109 000

---

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ temperature adjustment type: manually ▪ temperature measurement: 5 °C to 80 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 80 °C, after 0.1 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 5 A resistively, 1.5 A inductively ▪ power source: 230 V AC ▪ dimensions: 45 × 36 × 140 mm, thermowell: 58 mm, Ø 8 mm, 1/2'' thread





5 A/1.5 A | Energy saving | 5–80 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 120941

P5686 1/-/5/20

21 01 110 000

---

thermostat type: wireless with OpenTherm communication ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 115 × 91 mm





100 m | Wireless | 868 MHz | 230 V~

8 592920 098004

P5611OTR 1/-/-/24

21 01 308 000

---

thermostat type: socket ▪ type of control: programmable electronic indoor thermostat ▪ control mode: heating and cooling system ▪ number of programs for thermostat: customisable temperature (6× per day) ▪ temperature measurement: 0 °C to 45 °C, resolution 0.1 °C ▪ number of programs for timer: 24 ▪ number of switching per day for timer: 24 ▪ function to change summer/winter time ▪ dimensions: 82 × 62 × 146 mm





PROGRAMMABLE | 16 A/4 A | 5–40 °C | Heating /Cooling | Energy saving | Thermo & Timer | 230 V~

8 592920 115534

P5660FR 1/-/-/18

21 06 000 100

---

thermostat type: socket ▪ type of control: programmable electronic indoor thermostat ▪ control mode: heating and cooling system ▪ number of programs for thermostat: customisable temperature (6× per day) ▪ temperature measurement: 0 °C to 45 °C, resolution 0.1 °C ▪ number of programs for timer: 24 ▪ number of switching per day for timer: 24 ▪ function to change summer/winter time ▪ dimensions: 82 × 62 × 146 mm





PROGRAMMABLE | Heating /Cooling | 5–40 °C | 16 A/4 A | Energy saving | 16 A 3 680 W max. | 230 V~

8 592920 115541

P5660SH 1/-/-/18

21 06 000 200

Detectors

Detectors GoSmart

- detectors to secure your home
- optical and audible signalling
- device lifetime 10 years
- end-of-life detector and low battery signalling
- connect to your home network via WiFi protocol
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

detection type: smoke detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ transmission frequency: 2.4 GHz Wi-Fi ▪ operating temperature: 0 °C to 40 °C ▪ operating humidity: 0–93 % ▪ lifetime: 10 years ▪ IP rating: IP20 ▪ power source: 2× 1.5 V AA, included ▪ packaging: 1 pc, small box ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, IKEA, Open system ▪ protocol: Wi-Fi ▪ notifications to the mobile app





8 592920 122143

P56500S 1/-/-/16

21 04 103 000

detection type: detector CO ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ memory of alarms ▪ transmission frequency: 2.4 GHz Wi-Fi ▪ operating temperature: -10 °C to 40 °C ▪ operating humidity: 15–93 % ▪ lifetime: 10 years ▪ IP rating: IP30 ▪ power source: 2× 1.5 V AA, included ▪ packaging: 1 pc, small box ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, IKEA, Open system ▪ protocol: Wi-Fi ▪ notifications to the mobile app





8 592920 130780

P56400S 1/-/-/20

21 04 105 000

CO and smoke detectors

- optical and audible signalling
- the CO detector detects carbon monoxide (invisible and odourless)
- the smoke detector warns of a potential fire in the home
- suitable for users of gas boilers, stoves, fireplaces and cookers
- device lifetime 10 years

---

detection type: smoke detector ▪ type of installation: wall mounting ▪ type of signaling: optical and audible ▪ possibility to connect to other detectors: yes, by wire (max. 40 pcs) ▪ operating temperature: 0 °C to 40 °C ▪ operating humidity: 0–93 % ▪ lifetime: 10 years ▪ power source: 230 V AC, back-up battery: 1× 9 V, included ▪ packaging: 1 pc, small box





85 dB | Low battery warning | End of life warning | 230 V~ | 1× 9 V included | 10 YEARS | EASY TO INSTALL

8 592920 120927

P56502 1/-/-/12

21 01 505 006

---

detection type: smoke detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: 0 °C to 40 °C ▪ operating humidity: 5–95 % ▪ lifetime: 10 years ▪ power source: 1× 9 V, included ▪ packaging: 1 pc, small box





85 dB | Low battery warning | End of life warning | 1× 9 V included | 10 YEARS | EASY TO INSTALL

8 592920 048634

P56501 1/-/5/40

21 04 101 000

---

detection type: smoke detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ possibility to connect to other detectors: yes, wireless ▪ module range: up to 20 m ▪ transmission frequency: 433 MHz ▪ operating temperature: 10 °C to 45 °C ▪ operating humidity: 30–95 % ▪ lifetime: 10 years ▪ IP rating: IP20 ▪ power source: 2× 1.5 V AA, included ▪ packaging: 1 pc, small box





85 dB | Low battery warning | End of life warning | 2× 1.5 V AA included | 433.92 MHz | Wireless Connectable | 10 YEARS | EASY TO INSTALL

8 592920 036457

P56500 1/-/5/15

21 01 505 000

---

detection type: gas detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: -10 °C to 40 °C ▪ operating humidity: 0–95 % ▪ lifetime: 5 years ▪ IP rating: IPX2D ▪ power source: 230 V AC ▪ packaging: 1 pc, small box





85 dB | End of life warning | 230 V~ 50 Hz | 5 YEARS | EASY TO INSTALL

8 592920 076606

P56450 1/-/-/18

21 01 505 003

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

detection type: detector CO ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: -10 °C to 40 °C ▪ operating humidity: 30–95 % ▪ lifetime: 10 years ▪ IP rating: IP30 ▪ power source: 2× 1.5 V AA, included ▪ packaging: 1 pc, small box



85 dB | Low battery warning | End of life warning | 2× 1.5 V AA included | EU | 10 YEARS | EASY TO INSTALL

8 592920 103364

P56402
21 01 501 020

1/-/5/15

---

detection type: fire detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: 0 °C to 65 °C ▪ operating humidity: 0–93 % ▪ lifetime: 10 years ▪ power source: 1× 9 V, included ▪ packaging: 1 pc, small box



85 dB | Low battery warning | End of life warning | 1× 9 V included | 10 YEARS | EASY TO INSTALL

8 592920 120910

P56300
21 04 102 000

1/-/-/30

---

type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: -10 °C to 40 °C ▪ operating humidity: 30–95 % ▪ lifetime: 10 years ▪ IP rating: IP30 ▪ power source: 2× 1.5 V AA, included ▪ packaging: 1 pc, small box



85 dB | Low battery warning | End of life warning | 2× 1.5 V AA included | EU | 10 YEARS | EASY TO INSTALL

8 592920 107522

P56402PL
21 01 501 021

1/-/5/15

---

detection type: smoke detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: 0 °C to 40 °C ▪ operating humidity: 5–95 % ▪ lifetime: 10 years ▪ power source: 1× 9 V, included ▪ packaging: 1 pc, small box



85 dB | Low battery warning | End of life warning | 1× 9 V included | 10 YEARS | EASY TO INSTALL

8 592920 153130

P56503X
21 04 107 000

1/-/-/12

Radiator fans

- saving heating costs
- very low electricity consumption
- more comfortable and faster heating of the home
- easy installation on most hot water radiators and convectors
- quiet operation with a volume below 20 dB
- safe operation, TÜV certified

---

fans per unit: 3 fans ▪ airflow: 36 m³/h for each fan ▪ noise level: <20 dB ▪ fan speed: 1,800 RPM (default setting) ▪ on/off: ON 28°C – 40°C / OFF 25°C ▪ temperature measurement: 25 °C to 70 °C, resolution 0.1 °C ▪ temperature adjustment: from 28 °C up to 70 °C, after 1 °C ▪ power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) ▪ standby power consumption: 0.03 W ▪ material: heat-resistant PC with ABS ▪ colour: white ▪ power source: 5 V DC/2 000 mA (included) ▪ dimensions: 25 × 70 × 345 mm ▪ warranty period: 2 years ▪ packaging: 1 pc, small paper box





Extra silent < 20 dB | Boost speed | 5 V DC/ 2 000 mA | Energy saving | EASY TO INSTALL

8 592920 138045

P56PR3 1/-/-/4

21 07 563 000

---

fans per unit: 2 fans ▪ airflow: 36 m³/h for each fan ▪ noise level: <20 dB ▪ fan speed: 1,800 RPM (default setting) ▪ on/off: ON 28°C – 40°C / OFF 25°C ▪ temperature measurement: 25 °C to 70 °C, resolution 0.1 °C ▪ temperature adjustment: from 28 °C up to 70 °C, after 1 °C ▪ power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) ▪ standby power consumption: 0.03 W ▪ material: heat-resistant PC with ABS ▪ colour: white ▪ power source: 5 V DC/2 000 mA (included) ▪ dimensions: 25 × 70 × 345 mm ▪ warranty period: 2 years ▪ packaging: 1 pc, small paper box





Extra silent < 20 dB | Boost speed | 5 V DC/ 2 000 mA | Energy saving | EASY TO INSTALL

8 592920 138038

P56PR2 1/-/-/4

21 07 562 000

---

fans per unit: 1 fan ▪ airflow: 36 m³/h for each fan ▪ noise level: <20 dB ▪ fan speed: 1,800 RPM (default setting) ▪ on/off: ON 28°C – 40°C / OFF 25°C ▪ temperature measurement: 25 °C to 70 °C, resolution 0.1 °C ▪ temperature adjustment: from 28 °C up to 70 °C, after 1 °C ▪ power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) ▪ standby power consumption: 0.03 W ▪ material: heat-resistant PC with ABS ▪ colour: white ▪ power source: 5 V DC/2 000 mA (included) ▪ dimensions: 25 × 70 × 345 mm ▪ warranty period: 2 years ▪ packaging: 1 pc, small paper box





Extra silent < 20 dB | Boost speed | 5 V DC/ 2 000 mA | Energy saving | EASY TO INSTALL

8 592920 138021

P56PR1 1/-/-/6

21 07 561 000

---

fans per unit: 1 fan ▪ airflow: 36 m³/h for each fan ▪ noise level: <20 dB ▪ fan speed: 1,800 RPM (default setting) ▪ on/off: ON 28°C – 40°C / OFF 25°C ▪ temperature measurement: 25 °C to 70 °C, resolution 0.1 °C ▪ temperature adjustment: from 28 °C up to 70 °C, after 1 °C ▪ power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) ▪ standby power consumption: 0.03 W ▪ material: heat-resistant PC with ABS ▪ colour: white ▪ power source: 5 V DC/2 000 mA (not included) ▪ dimensions: 25 × 70 × 345 mm ▪ warranty period: 2 years ▪ packaging: 1 pc, small paper box





Extra silent < 20 dB | Boost speed | 5 V DC/ 2 000 mA | Energy saving | EASY TO INSTALL

8 592920 138052

P56EXT1 1/-/-/6

21 07 956 100

Watering timers

Watering timers GoSmart

- manual and automatic control
- adjustable timing and volume of water used
- variants with one outlet or two for 2-zone irrigation
- rain delay function
- connection to home network via Bluetooth protocol
- compatibility with EMOS GoSmart products and TUYA devices
- voice control with Google Assistant and Amazon Alexa

operating water pressure : 0,5–8 bar ▪ maximum flow rate : 35 l/min ▪ Irrigation frequency : unlimited ▪ irrigation duration : 1 minute - 24 hours ▪ irrigation cycles per day : unlimited ▪ thread : 3/4", 1" ▪ manual irrigation ▪ IP rating: IP54 ▪ power source: 4× 1.5 V AA (not included) ▪ dimensions: 135 × 160 × 70 mm ▪ packaging: 1 pc, small box ▪ series: GoSmart ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Bluetooth 5.0 ▪ control by voice assistants ▪ notifications to the mobile app ▪ warranty period: 2 years





8 592920 141755

PW56202 1/-/-/8

21 05 562 020

operating water pressure : 0,5–8 bar ▪ maximum flow rate : 35 l/min ▪ Irrigation frequency : unlimited ▪ irrigation duration : 1 minute - 24 hours ▪ irrigation cycles per day : unlimited ▪ thread : 3/4", 1" ▪ manual irrigation ▪ IP rating: IP54 ▪ power source: 4× 1.5 V AA (not included) ▪ dimensions: 120 × 160 × 55 mm ▪ packaging: 1 pc, small box ▪ series: GoSmart ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Bluetooth 5.0 ▪ control by voice assistants ▪ notifications to the mobile app ▪ warranty period: 2 years





8 592920 141731

PW56201 1/-/-/12

21 05 562 010

Watering timers

- manual control
- adjustable timing and volume of water used
- easy installation

operating water pressure : 0,5–8 bar ▪ maximum flow rate : 35 l/min ▪ Irrigation frequency : 1 - 2 - 3 - 4 - 5 - 6 - 8 - 12 - 24 - 48 - 72 hours - 1 week ▪ irrigation duration : 3 - 5 - 10 - 15 - 20 - 30 - 45 - 60 - 90 - 120 min ▪ irrigation cycles per day : max 24 ▪ thread : 3/4", 1" ▪ manual irrigation ▪ IP rating: IP54 ▪ power source: 2× 1.5 V AA (not included) ▪ dimensions: 140 × 155 × 75 mm ▪ packaging: 1 pc, small box ▪ warranty period: 2 years








8 592920 141717

PW56001 1/-/-/8

21 05 560 010

Installation materials, tapes

Comprehensive solutions for installations and everyday use

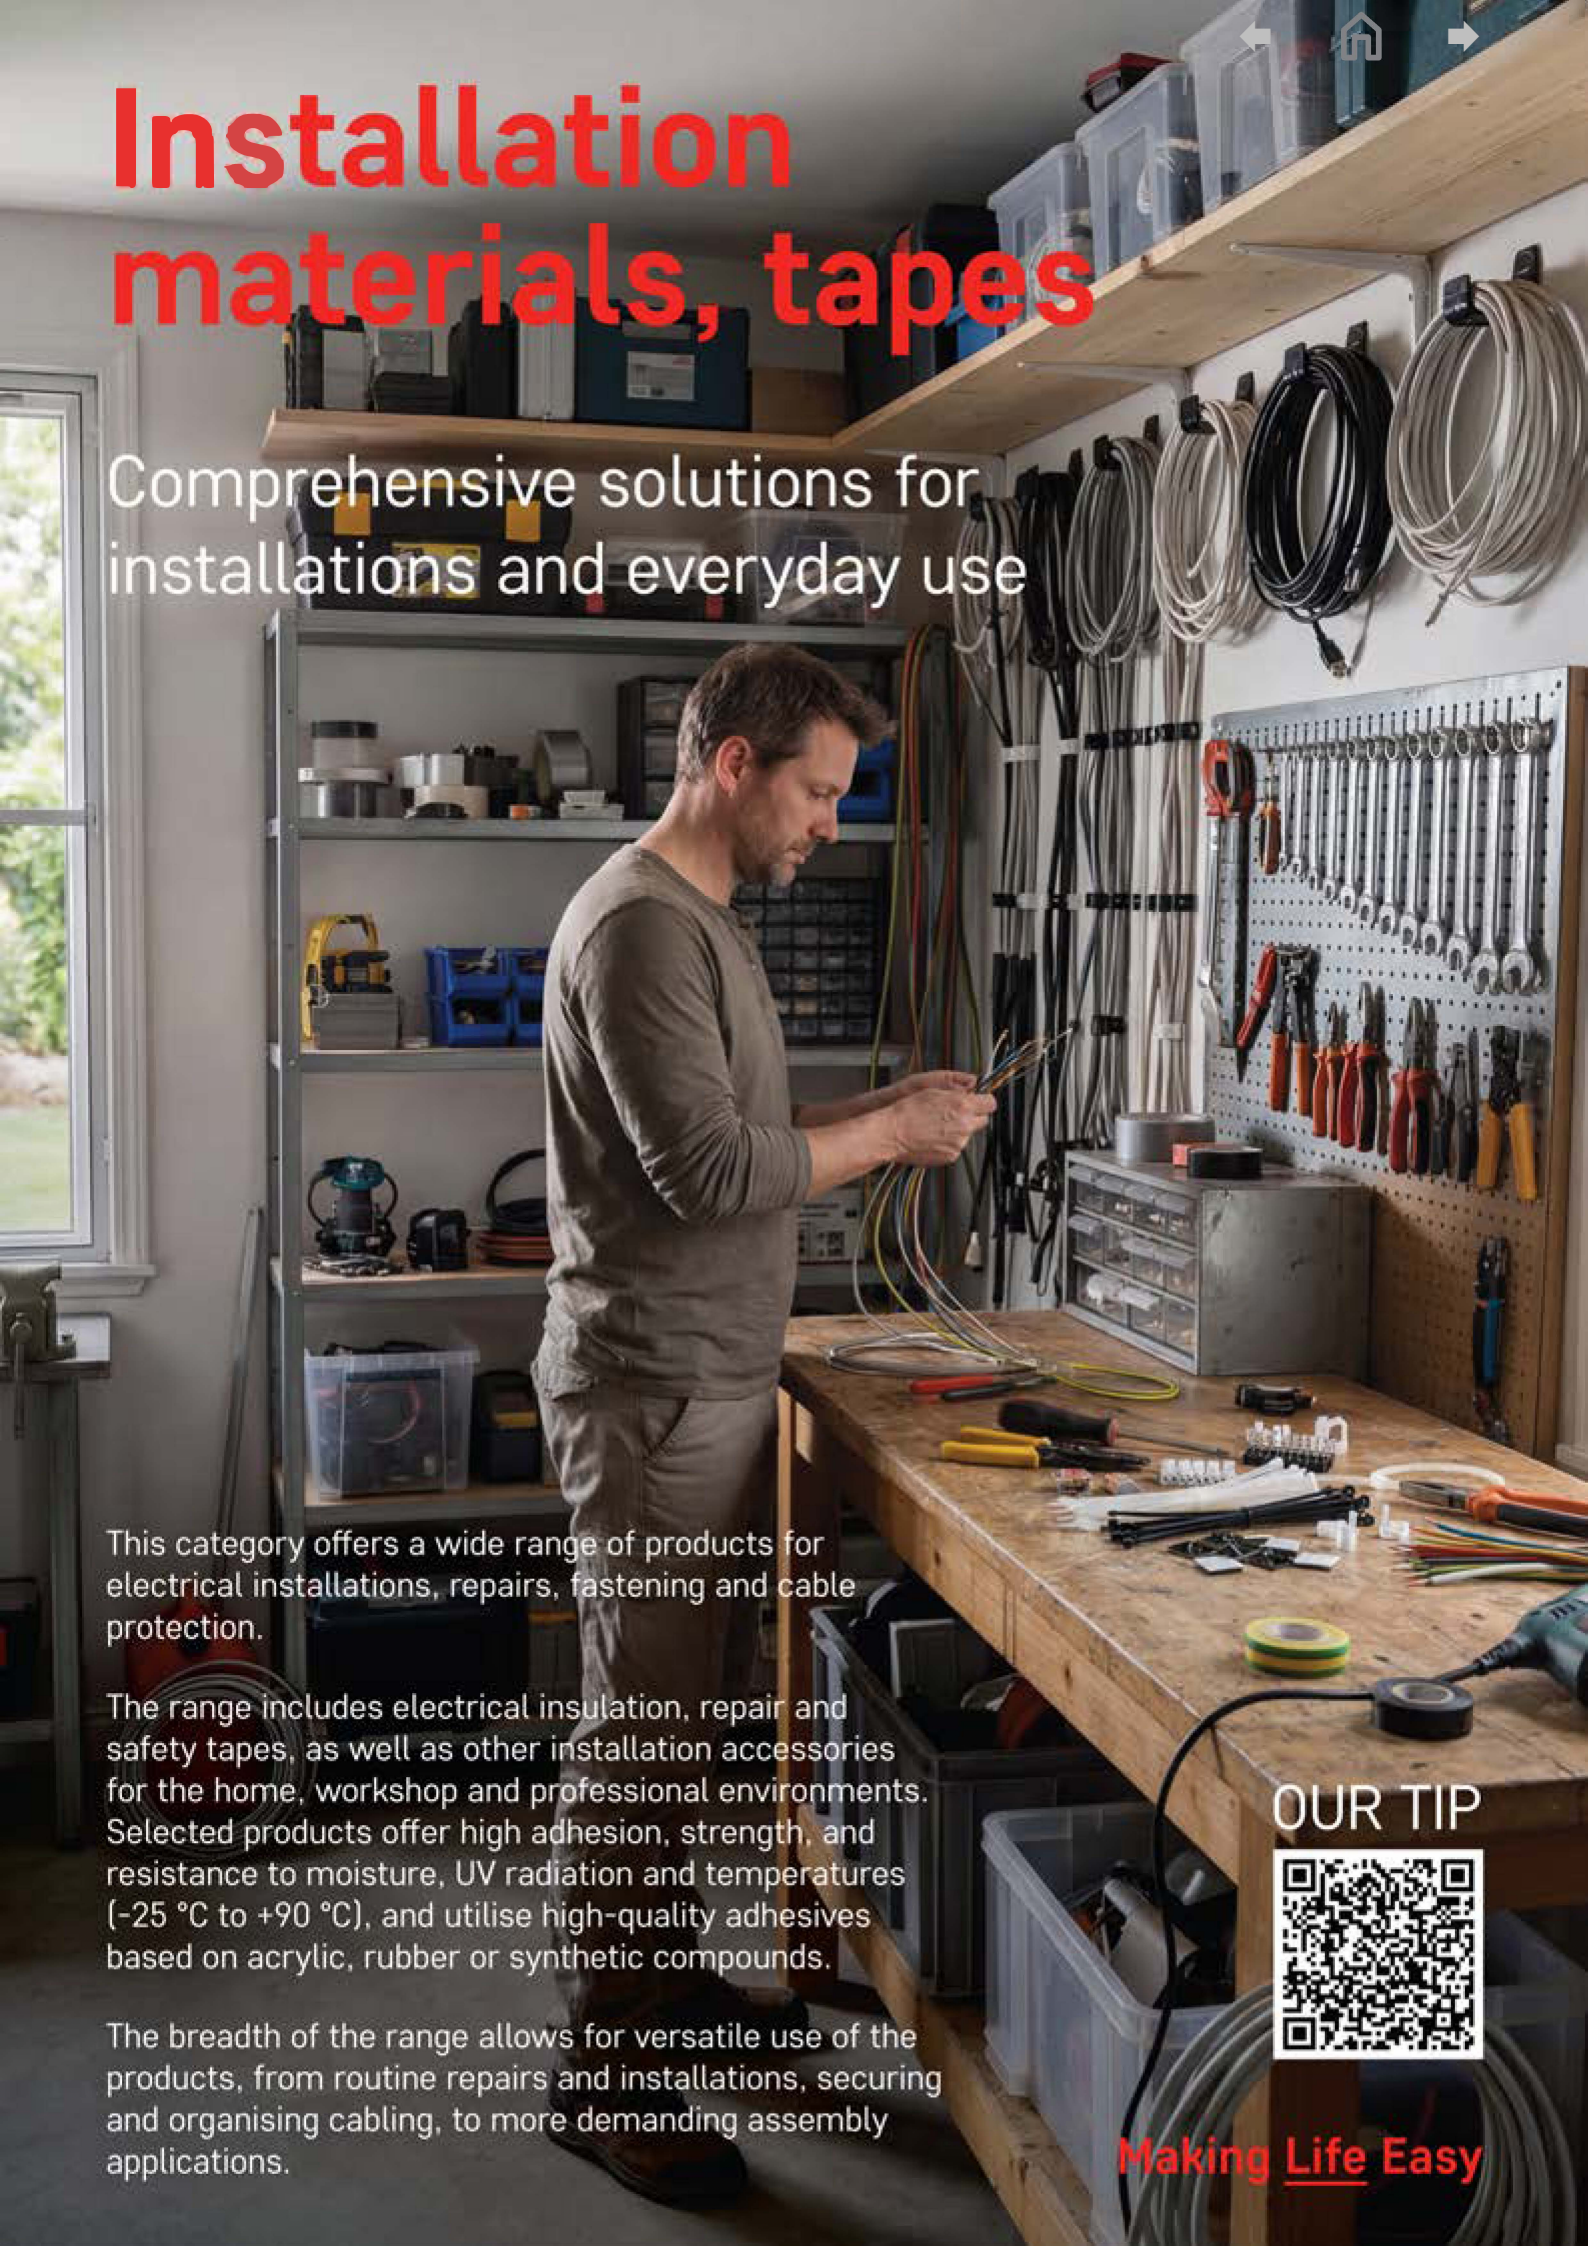

This category offers a wide range of products for electrical installations, repairs, fastening and cable protection.

The range includes electrical insulation, repair and safety tapes, as well as other installation accessories for the home, workshop and professional environments. Selected products offer high adhesion, strength, and resistance to moisture, UV radiation and temperatures (-25 °C to +90 °C), and utilise high-quality adhesives based on acrylic, rubber or synthetic compounds.

The breadth of the range allows for versatile use of the products, from routine repairs and installations, securing and organising cabling, to more demanding assembly applications.

OUR TIP

Making Life Easy



Installation material, tapes

Installation material

Sockets, switches

EMOS

IP20

- installation: into a junction box
- in white and anthracite colour
- some models with USB output

A6000.5 1/-/10/40

19 06 010 512

8 592920 119570

1× USB-C 1× USB-A



product: single socket with protective contacts and USB output 3 A max. ▪ design: GERMAN ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box (recommended depth min. 60 mm) ▪ version: single ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, PE packet

A6002.0 1/-/10/60

19 06 010 504

8 592920 074763

1×



product: single socket with protective pin and child safety cover ▪ design: GERMAN ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box ▪ version: single ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6100.0 1/-/10/60

19 06 200 100

8 592920 074619

IP20



product: alternating switch no. 6 ▪ design: IP20 ▪ voltage: 250 V~ ▪ type of mounting: into a box ▪ version: 1 button stairway ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6100.1 1/-/10/60

19 06 200 101

8 592920 074671

IP20



product: parallel switch nr. 5 ▪ voltage: 250 V~/10 AX ▪ type of mounting: into a box ▪ version: 2 buttons ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6100.2 1/-/10/60

19 06 200 102

8 592920 074732



product: cross switch no. 7 ▪ voltage: 250 V~/10 AX ▪ type of mounting: into a box ▪ version: 1 button ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6100.3 1/-/10/60

19 06 200 103

8 592920 074701




product: double two-way switch 6+6 (5B) ▪ voltage: 250 V~/10 AX ▪ type of mounting: into a box ▪ version: 2 buttons ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6100.4 1/-/10/60

19 06 200 104

8 592920 074640



product: switch controller (1/0) ▪ voltage: 250 V~/10 A ▪ type of mounting: into a box ▪ version: 1 button ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6004.2 1/-/5/30

19 06 300 100

8 592920 074916



product: quadruple frame ▪ voltage: for horizontal and vertical installation ▪ type of mounting: into a box ▪ version: quadruple ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6004.1 1/-/10/60

19 06 300 101

8 592920 074886



product: triple frame ▪ voltage: for horizontal and vertical installation ▪ type of mounting: into a box ▪ version: triple ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6004.0 1/-/10/60

19 06 300 102

8 592920 074855



product: double frame ▪ voltage: for horizontal and vertical installation ▪ type of mounting: into a box ▪ version: double ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6003.0 1/-/10/40

19 06 300 103

8 592920 074947



product: switching device for adjustable LED lamps for turn-controls and button switching ▪ design: 7–150 W/VA vacuum and halogen lamps for 230 V~, dimmable compact fluorescent lamps.3–100 W/VA for dimmable LED ▪ voltage: 230 V~, 50 Hz ▪ version: turn-controls and button switching ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6004.3 1/-/10/240

19 06 300 104

8 592920 083789



product: socket cover TV+R+SAT ▪ type of mounting: into a box ▪ version: single ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6004.4 1/-/10/240

19 06 300 105

8 592920 083796



product: data socket cover 2×RJ45 ▪ type of mounting: into a box ▪ version: double ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6000.7 1/-/10/40

19 06 010 513

8 592920 141540



product: single socket with protective contacts and USB output 3 A max. ▪ design: GERMAN ▪ voltage: 250 V~ ▪ type of mounting: into a box (recommended depth min. 60 mm) ▪ version: single ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, PE packet

A6000.3 1/-/10/40

19 06 010 507

SALE

8 592920 097144



product: single socket with protective side contact and USB output 2.1 A max. ▪ design: GERMAN ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box (recommended depth min. 40 mm) ▪ version: single ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, PE packet

A6002.2 1/-/10/60

19 06 010 510

8 592920 097205



product: single socket with protective pin and child safety cover ▪ design: GERMAN ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box ▪ version: single ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6100.5 1/-/10/60

19 06 200 105

8 592920 097151



product: alternating switch no. 6 ▪ voltage: 250 V~/10 AX ▪ type of mounting: into a box ▪ version: 1 button stairway ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6100.6 1/-/10/60

19 06 200 106

8 592920 097175



product: parallel switch nr. 5 ▪ voltage: 250 V~/10 AX ▪ type of mounting: into a box ▪ version: 2 buttons ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6100.7 1/-/10/60

19 06 200 107

8 592920 097199



product: cross switch no. 7 ▪ voltage: 250 V~/10 AX ▪ type of mounting: into a box ▪ version: 1 button ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6100.8 1/-/10/60

19 06 200 108

8 592920 097182



product: double two-way switch 6+6 (5B) ▪ voltage: 250 V~/10 AX ▪ type of mounting: into a box ▪ version: 2 buttons ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6100.9 1/-/10/60

19 06 200 109

8 592920 097168



product: switch controller (1/0) ▪ voltage: 250 V~/10 A ▪ type of mounting: into a box ▪ version: 1 button ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6004.7 1/-/5/30

19 06 300 106

8 592920 097250



product: quadruple frame ▪ voltage: for horizontal and vertical installation ▪ type of mounting: into a box ▪ version: quadruple ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6004.6 1/-/10/60

19 06 300 107

8 592920 097243




product: triple frame ▪ voltage: for horizontal and vertical installation ▪ type of mounting: into a box ▪ version: triple ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6004.5 1/-/10/60

19 06 300 108

8 592920 097236



product: double frame ▪ voltage: for horizontal and vertical installation ▪ type of mounting: into a box ▪ version: double ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6003.1 1/-/10/40

19 06 300 109







product: switching device for adjustable LED lamps for turn-controls and button switching ▪ design: 7–150 W/VA vacuum and halogen lamps for 230 V~, dimmable compact fluorescent lamps.3–100 W/VA for dimmable LED ▪ voltage: 230 V~, 50 Hz ▪ version: turn-controls and button switching ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6004.8 1/-/10/240

19 06 300 110







product: socket cover TV+R+SAT ▪ type of mounting: into a box ▪ version: single ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6004.9 1/-/10/240

19 06 300 111







product: data socket cover 2×RJ45 ▪ type of mounting: into a box ▪ version: double ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6001.0 1/-/10/60

19 06 010 502







product: single socket with safety pin and child safety covers ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box ▪ version: single ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6001.1 1/-/5/30

19 06 010 503







product: double socket with protective contacts and child safety covers ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box ▪ version: double ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, hanging

A6001.2 1/-/10/60

19 06 010 508







product: single socket with safety pin and child safety covers ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box ▪ version: single ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6001.3 1/-/5/30

19 06 010 509







product: double socket with protective contacts and child safety covers ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box ▪ version: double ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, hanging

A6000.4 1/-/10/40

19 06 010 511







product: single socket with protective pin and USB output 3 A max. ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: into a box (recommended depth min. 60 mm) ▪ version: single ▪ IP rating: IP20 ▪ colour: white (gloss) ▪ packaging: 1 pc, PE packet

A6000.6 1/-/10/40

19 06 010 514







product: single socket with protective pin and USB output 3 A max. ▪ design: FRENCH ▪ voltage: 250 V~ ▪ type of mounting: into a box (recommended depth min. 60 mm) ▪ version: single ▪ IP rating: IP20 ▪ colour: anthracite ▪ packaging: 1 pc, PE packet

IP54/IP44

- installation: onto a wall
- enclosure: IP44 and IP54
- multiple sockets are internally connected

A1398 1/5/-/60

31 04 139 800







product: alternating switch – no. 6 ▪ voltage: 250 V~/10 AX ▪ type of mounting: on the wall ▪ version: 1 button stairway, waperproof ▪ IP rating: IP54 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1398.1 1/5/-/60

31 04 139 811







product: serial switch no. 5 (chandelier) ▪ voltage: 250 V~/10 AX ▪ type of mounting: on the wall ▪ version: 2 buttons classic water-resistant ▪ IP rating: IP54 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1396 1/5/-/60

31 04 139 600









product: socket with earthing pin and lid ▪ design: GERMAN ▪ voltage: 250 V~/16 A max. ▪ type of mounting: on the wall ▪ version: single water-resistant ▪ IP rating: IP44 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1396.1 1/5/-/25

31 04 139 611









product: double socket with earthing pins and lids with interconnection ▪ design: GERMAN ▪ voltage: 250 V~/16 A max. ▪ type of mounting: on the wall ▪ version: double water-resistant ▪ IP rating: IP44 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1396.3 1/5/-/25

19 50 010 207









product: double socket with earthing pins and lids with interconnection ▪ design: GERMAN ▪ voltage: 250 V~ ▪ type of mounting: on the wall ▪ version: double water-resistant – vertical mounting ▪ IP rating: IP44 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1396.4 1/5/-/25

19 50 010 208









product: combination of alternating switch nr.6 and socket with earthing pin and lid ▪ design: GERMAN ▪ voltage: 250 V~ ▪ type of mounting: on the wall ▪ version: double water-resistant – vertical mounting ▪ IP rating: IP44 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1399 1/5/-/60

19 50 011 201







product: switch controller (1/0) ▪ voltage: 250 V~/10 A ▪ type of mounting: on the wall ▪ version: 1 button ▪ IP rating: IP54 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1398.2 1/5/-/60

19 50 011 202







product: cross switch no. 7 ▪ voltage: 250 V~/10 AX ▪ type of mounting: on the wall ▪ version: 1 button ▪ IP rating: IP54 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

A1398.3 1/5/-/60

19 50 011 203

8 592920 074169



product: alternating switch no. 6 ▪ voltage: 250 V~/10 AX ▪ type of mounting: on the wall ▪ version: 1 button stairway, waterproof ▪ IP rating: IP54 ▪ colour: white ▪ packaging: 1 pc, PE packet

A1398.4 1/5/-/60

19 50 011 204

8 592920 074190



product: serial switch no. 5 (chandelier) ▪ voltage: 250 V~/10 AX ▪ type of mounting: on the wall ▪ version: 2 buttons classic water-resistant ▪ IP rating: IP54 ▪ colour: white ▪ packaging: 1 pc, PE packet

A1396.2 1/5/-/25

19 50 011 207

8 592920 090206



product: combination of alternating switch nr.6 and socket with earthing pin and lid ▪ design: GERMAN ▪ voltage: socket 250 V~/16 A max.; switch 250 V~, 10AX ▪ type of mounting: on the wall ▪ version: double water-resistant - 1× socket + 1× alternating switch ▪ IP rating: IP44 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1397.2 1/5/-/60

19 50 010 205

8 592920 074107



product: gang socket with safety pin and lid ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: on the wall ▪ version: single water-resistant ▪ IP rating: IP54 ▪ colour: white ▪ packaging: 1 pc, PE packet

A1397.3 1/5/-/25

19 50 010 206

8 592920 074138



product: double socket with earthing pins and lids with interconnection ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: on the wall ▪ version: double water-resistant ▪ IP rating: IP44 ▪ colour: white ▪ packaging: 1 pc, PE packet

A1397.4 1/5/-/25

19 50 011 205

8 592920 090237



product: combination of alternating switch no. 6 and a single socket with earthing pin and lid ▪ design: FRENCH ▪ voltage: socket 250 V~/16 A max.; switch 250 V~, 10AX ▪ type of mounting: on the wall ▪ version: double water-resistant - 1× socket + 1× alternating switch ▪ IP rating: IP44 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1397.5 1/5/-/25

19 50 011 206

8 592920 090268



product: combination of alternating switch no. 6 and a single socket with earthing pin and lid ▪ design: FRENCH ▪ voltage: socket 250 V~/16 A max.; switch 250 V~, 10AX ▪ type of mounting: on the wall ▪ version: double water-resistant - 1× socket + 1× alternating switch ▪ IP rating: IP44 ▪ colour: white (matte) ▪ packaging: 1 pc, PE packet

A1397 1/5/-/60

31 04 139 700

8 592920 030844



product: gang socket with safety pin and lid ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: on the wall ▪ version: single water-resistant ▪ IP rating: IP54 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

A1397.1 1/5/-/25

31 04 139 711

8 592920 030851



product: double socket with earthing pins and lids with interconnection ▪ design: FRENCH ▪ voltage: 250 V~/16 A max. ▪ type of mounting: on the wall ▪ version: double water-resistant ▪ IP rating: IP44 ▪ colour: grey-black ▪ packaging: 1 pc, PE packet

Scene switches GoSmart

EMOS GoSmart

- control multiple devices with a single press
- activation of smart scenes and automations
- easy integration into the smart home system
- installation without complex wiring
- connection via ZigBee protocol
- compatible with EMOS GoSmart products and TUYA devices

Powered by tuya

Works with Amazon Alexa Google Assistant

App Store

Google Play

- product: IP Smart Scene Switcher
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 1× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121221

H5011 30 69 050 110 — 1/-/-/60 — SALE

- product: IP Smart Scene Switcher
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 1× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121511

H5014 30 69 050 140 — 1/-/-/60 — SALE

- product: IP Smart Scene Switcher
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 2
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 2× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121535

H5015 30 69 050 150 — 1/-/-/60 — SALE

- product: IP Smart Scene Switcher
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 4
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 4× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121559

H5016 30 69 050 160 — 1/-/-/60 — SALE

Modules GoSmart

EMOS GoSmart

- smart control without affecting interior design
- skrytá instalace do stávajících vypínačů a zásuvek
- support for automations and scenarios
- connection to the home network via WiFi / ZigBee
- compatible with EMOS GoSmart products and TUYA devices
- voice control support via Google Assistant and Amazon Alexa

Powered by tuya | Works with Amazon Alexa Google Assistant | App Store | Google Play

---

- product: IP switching module
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0 No Neutral



8 592920 126028

H5103 | 30 69 051 030 | 1/-/-/100 | SALE

- product: IP switching module
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0 No Neutral



8 592920 126004

H5104 | 30 69 051 040 | 1/-/-/100 | SALE

- product: IP dimming module
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0



8 592920 125946

H5107 | 30 69 051 070 | 1/-/-/100 | SALE

- product: IP dimming module
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0



8 592920 125922

H5108 | 30 69 051 080 | 1/-/-/100 | SALE

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: IP motor module
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 125908

H5109
30 69 051 090

1/-/-/100
SALE

- product: IP motor module
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 125885

H5110
30 69 051 100

1/-/-/100
SALE

- product: IP switching module
- connectivity: 2,4 GHz (IEEE 802.15.4)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 157848

H5121
30 69 051 210

1/-/-/90
NEW

- product: IP switching module
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

Wi Fi





8 592920 157862

H5125
30 69 051 250

1/-/-/90
NEW

- product: IP switching module
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

Wi Fi





8 592920 157886

H5126
30 69 051 260

1/-/-/90
NEW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: IP dimming module
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





Wi Fi

8 592920 157909

H5127
30 69 051 270

1/-/-/90
NEW

- product: IP dimming module
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





Wi Fi

8 592920 157923

H5128
30 69 051 280

1/-/-/90
NEW

- product: IP motor module
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





Wi Fi

8 592920 157947

H5129
30 69 051 290

1/-/-/90
NEW

- product: IP garage module
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





Wi Fi

8 592920 157985

H5131
30 69 051 310

1/-/-/30
NEW

- product: IP module NO / NC / COM
- connectivity: 2.4 GHz (IEEE802.11b/g/n)
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





Wi Fi

8 592920 157961

H5132
30 69 051 320

1/-/-/90
NEW

Others

- inline single-pole cord switches (white or black)
- simple universal design

A1208 1/-/50/200

31 07 120 800



- product: one pole through switch
- voltage: 250 V~
- type of mounting: on a cable H03VVH2-F
- version: 1 button cord, through
- IP rating: IP20
- colour: white
- packaging: 1 pc, hanging

A1209 1/-/50/200

31 07 120 900



- product: one pole through switch
- voltage: 250 V~
- type of mounting: on a cable H03VVH2-F
- version: 1 button cord, through
- IP rating: IP20
- colour: black
- packaging: 1 pc, hanging

Installation material

Sockets, switches

ABB

Others

- through single-pole cord switches (white or black)

A1602 1/-/-/60

31 08 160 200



product: ABB separate plug with the option for turning the inner plate by 4× 90° ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ children protection: no ▪ IP rating: IP20 ▪ material: plastic ▪ packaging: no packaging

Installation material

Sockets, switches

TESLA STROPKOV

STANDARD – FRENCH

- sockets and switches with sharper curves and a subtle gloss
- selection of many color variants
- single and double sockets, protective pins and a rotated upper cavity
- switches have 1 or 2 buttons

A0252 1/-/-/48

90 23 015 220

8 585001 547546



- product: double socket with safety pins
- design: standard
- voltage: 4FN15098.2116
- type of mounting: into a box
- version: double
- colour: brown (gloss)
- packaging: 1 pc, no packaging

A0250 1/-/-/48

90 23 015 150

8 585001 547539



- product: double socket with safety pins
- design: standard
- voltage: 4FN15098.2101
- type of mounting: into a box
- version: double
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0243 1/-/-/66

90 23 014 620

8 585001 557583



- product: gang socket with safety pin
- design: standard
- voltage: 4FN15059.2116
- type of mounting: into a box
- version: single
- colour: brown (gloss)
- packaging: 1 pc, no packaging

A0242 1/-/-/66

90 23 014 550

8 585001 556289



- product: gang socket with safety pin
- design: standard
- voltage: 4FN15059.2101
- type of mounting: into a box
- version: single
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0232 1/-/-/35

90 23 011 950

8 585001 556562



- product: switch controller (1/0)
- design: standard
- voltage: 4FN57512.2101
- type of mounting: into a box
- version: without glow lamp
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0227 1/-/-/35

90 23 011 250

8 585001 556463



- product: switch no. 7 – three-way
- design: standard
- voltage: 4FN57507.2101
- type of mounting: into a box
- version: 1 button
- colour: white (gloss)
- packaging: 1 pc, no packaging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

A0223 1/-/-/35

90 23 010 710

8 585001 556432



- product: switch no. 6 – two-way
- design: standard
- voltage: 4FN57505.2116
- type of mounting: into a box
- version: 1 button
- colour: brown (gloss)
- packaging: 1 pc, no packaging

A0221 1/-/-/35

90 23 010 650

8 585001 556425



- product: switch no. 6 – two-way
- design: standard
- voltage: 4FN57505.2101
- type of mounting: into a box
- version: 1 button
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0216 1/-/-/35

90 23 010 320

8 585001 556371



- product: switch no. 5 – chandelier
- design: standard
- voltage: 57502.2116
- type of mounting: into a box
- version: 2 buttons
- colour: brown (gloss)
- packaging: 1 pc, no packaging

A0214 1/-/-/35

90 23 010 250

8 585001 556364



- product: switch no. 5 – chandelier
- design: standard
- voltage: 57502.2101
- type of mounting: into a box
- version: 2 buttons
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0209 1/-/-/35

90 23 009 920

8 585001 556333



- product: switch no. 1 – 1-pole
- design: standard
- voltage: 4FN57500.2116
- type of mounting: into a box
- version: 1 button
- colour: brown (gloss)
- packaging: 1 pc, no packaging

A0207 1/-/-/35

90 23 009 850

8 585001 556326



- product: switch no. 1 – 1-pole
- design: standard
- voltage: 4FN57500.2101
- type of mounting: into a box
- version: 1 button
- colour: white (gloss)
- packaging: 1 pc, no packaging

PRAKTIK – FRENCH

- sockets and switches with rounded curves and a high-gloss finish
- single and double sockets, protective pins and a rotated upper cavity
- switches have 1 or 2 buttons

A0260 1/-/-/30

90 23 016 800

8 585001 526657



- product: switch no. 1 – 1-pole
- design: practic
- voltage: 4FN58000.901
- type of mounting: into a box
- version: 1 button
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0264 1/-/-/30

90 23 017 100

8 585001 526695



- product: switch no. 5 – chandelier
- design: practic
- voltage: 58002.901
- type of mounting: into a box
- version: 2 buttons
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0267 1/-/-/30

90 23 017 500



- product: double alternating switch no. 5
- design: practic
- voltage: 58004.901
- type of mounting: into a box
- version: 2 buttons
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0268 1/-/-/30

90 23 017 800



- product: switch no. 6 – two-way
- design: practic
- voltage: 4FN58005.901
- type of mounting: into a box
- version: 1 button
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0271 1/-/-/30

90 23 018 200



- product: switch no. 7 – three-way
- design: practic
- voltage: 4FN58007.901
- type of mounting: into a box
- version: 1 button
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0273 1/-/-/60

90 23 019 000



- product: gang socket with safety pin
- design: practic
- voltage: 4FN15065.901
- type of mounting: into a box
- version: single
- IP rating: IP20
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0279 1/-/-/48

90 23 019 900



- product: double socket with earthing pin
- design: practic
- voltage: 4FN15066.901
- type of mounting: into a box
- version: double
- colour: white (gloss)
- packaging: 1 pc, no packaging

A0282 1/-/-/48

90 23 020 101



- product: double socket with safety pins
- design: practic
- voltage: 4FN15088.901
- type of mounting: into a box
- version: double
- colour: white (gloss)
- packaging: 1 pc, no packaging

Installation material

Sockets, switches

EMOS

CYKLONE – FRENCH

- option for horizontal and vertical mounting
- flexible seal ensuring tightness
- cable passage for easy connection of cable or socket
- side hole for condensate drainage
- flexible edge around the perimeter to adapt to wall irregularities
- reinforcing edge around the mounting area to improve tightness

D730420 1/5/-/80

19 50 730 420

8 592920 136393



- product: single socket with safety pin a
- design: Cyklone
- voltage: 250 V~/16 A max.
- type of mounting: on the wall
- version: single water-resistant
- IP rating: IP55
- colour: grey
- packaging: 1 pc

D730421 1/5/-/45

19 50 730 421

8 592920 136423



- product: double socket with safety pins
- design: Cyklone
- voltage: 250 V~/16 A max.
- type of mounting: on the wall
- version: double water-resistant
- IP rating: IP55
- colour: grey
- packaging: 1 pc

D730422 1/5/-/80

19 50 730 422

8 592920 136454



- product: alternating switch – no. 6
- design: Cyklone
- voltage: 250 V~/10 AX
- type of mounting: on the wall
- version: 1 button stairway, waterproof
- IP rating: IP55
- colour: grey
- packaging: 1 pc

D730423 1/5/-/80

19 50 730 423

8 592920 152553



- product: double two-way switch 6+6 (5
- design: Cyklone
- voltage: 250 V~/10 AX
- type of mounting: on the wall
- version: 2 buttons, water-resistant
- IP rating: IP55
- colour: grey
- packaging: 1 pc

D730427 1/5/-/80

19 50 730 427

8 592920 136485



- product: switch controller (1/0)
- design: Cyklone
- voltage: 250 V~
- type of mounting: on the wall
- version: 1 button water-resistant
- IP rating: IP55
- colour: grey
- packaging: 1 pc

D730429 1/5/-/45

19 50 730 429

8 592920 136515



- product: combination of alternating swit
- design: Cyklone
- voltage: socket 250 V~/16 A max.; switc
- type of mounting: on the wall
- version: double water-resistant - 1× soc
- IP rating: IP55
- colour: grey
- packaging: 1 pc

Installation material

Terminal blocks

- safe and well-organized connection of conductors
- fast installation without unnecessary complications
- reliable solution for electrical installations
- durable materials for long-term use
- suitable for both cable installation and servicing

A2201 10/-/-/400

31 14 220 100

8 592920 039847



product: plastic box terminal, 4-pole ▪ for conductor cross-section: 4 mm ▪ rated voltage: 400 V~ ▪ packaging: 10 pcs, PE packet

A9101 10/-/-/2,400

31 14 991 010

NEW

8 592920 154489



10×

product: non screw clip ▪ for conductor cross-section: 0.2–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 13.2 × 20.1 × 9.2 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A9102 10/-/-/2,000

31 14 991 020

NEW

8 592920 154496



10×

product: non screw clip ▪ for conductor cross-section: 0.2–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 18.8 × 20.1 × 9.2 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A9103 10/-/-/1,600

31 14 991 030

NEW

8 592920 154502



10×

product: non screw clip ▪ for conductor cross-section: 0.2–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 24.4 × 20.1 × 9.2 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A9104 10/-/-/1,200

31 14 991 040

NEW

8 592920 154519



10×

product: non screw clip ▪ for conductor cross-section: 0.2–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 30.3 × 20.1 × 9.2 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A9111 10/-/-/2,400

31 14 991 110

NEW

8 592920 154526



10×

product: non screw clip ▪ for conductor cross-section: 0.2–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 39.3 × 10 × 8.3 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

A9112 10/-/-/1,600

31 14 991 120

NEW

8 592920 154533



product: non screw clip ▪ for conductor cross-section: 0.2–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 39.3 × 10 × 14.9 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A9113 10/-/-/600

31 14 991 130

NEW

8 592920 154540



product: non screw clip ▪ for conductor cross-section: 0.2–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 39.3 × 10 × 22.9 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A9121 10/-/-/2,400

31 14 991 210

NEW

8 592920 154557



product: non screw clip ▪ for conductor cross-section: 0.5–2.5 mm2 ▪ current: 24 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, packet ▪ dimensions: 15.3 × 7.85 × 18.8 mm ▪ UV protection: no ▪ working temperature range: -10°C – 85°C ▪ complies with: EN 60998-2-2:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A4101 1/-/-/250

31 46 001 040

NEW

8 592920 154847



product: terminal block ▪ for conductor cross-section: 2.5–4 mm2 ▪ current: 32 A ▪ rated voltage: 400 V~ ▪ hole diameter: 3.1 mm ▪ packaging: 1 pc, packet ▪ dimensions: 91.6 × 15.6 × 12 mm ▪ UV protection: no ▪ working temperature range: -30°C – 85°C ▪ complies with: EN 60998-2-1:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A4102 1/-/-/200

31 46 001 060

NEW

8 592920 154854



product: terminal block ▪ for conductor cross-section: 4–6 mm2 ▪ current: 41 A ▪ rated voltage: 400 V~ ▪ hole diameter: 3.6 mm ▪ packaging: 1 pc, packet ▪ dimensions: 110.9 × 15.8 × 14.2 mm ▪ UV protection: no ▪ working temperature range: -30°C – 85°C ▪ complies with: EN 60998-2-1:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A4103 1/-/-/150

31 46 001 100

NEW

8 592920 154861



product: terminal block ▪ for conductor cross-section: 6–10 mm2 ▪ current: 57 A ▪ rated voltage: 400 V~ ▪ hole diameter: 4.5 mm ▪ packaging: 1 pc, packet ▪ dimensions: 118 × 20.2 × 16.5 mm ▪ UV protection: no ▪ working temperature range: -30°C – 85°C ▪ complies with: EN 60998-2-1:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A4105 10/-/-/600

31 46 011 040

NEW

8 592920 154878



product: terminal block ▪ for conductor cross-section: 2.5–4 mm2 ▪ current: 32 A ▪ rated voltage: 400 V~ ▪ hole diameter: 3.1 mm ▪ packaging: 10 pcs, foil ▪ dimensions: 91.6 × 15.6 × 12 mm ▪ UV protection: no ▪ working temperature range: -30°C – 85°C ▪ complies with: EN 60998-2-1:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A4106 10/-/-/400

31 46 011 060

NEW

8 592920 154885



product: terminal block ▪ for conductor cross-section: 4–6 mm2 ▪ current: 41 A ▪ rated voltage: 400 V~ ▪ hole diameter: 3.6 mm ▪ packaging: 10 pcs, foil ▪ dimensions: 110.9 × 15.8 × 14.2 mm ▪ UV protection: no ▪ working temperature range: -30°C – 85°C ▪ complies with: EN 60998-2-1:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

A4107 10/-/-/250

31 46 011 100

NEW

8 592920 154892



product: terminal block ▪ for conductor cross-section: 6–10 mm2 ▪ current: 57 A ▪ rated voltage: 400 V~ ▪ hole diameter: 4.5 mm ▪ packaging: 10 pcs, foil ▪ dimensions: 118 × 20.2 × 16.5 mm ▪ UV protection: no ▪ working temperature range: -30°C – 85°C ▪ complies with: EN 60998-2-1:2004; EN 60998-1:2004 ▪ self-extinguishing: EN 60695-2-11 (850°C) ▪ insulation voltage: EN 60998-2-1 (250 V)

Fixing of cables, clips

- fast and reliable cable fastening
- clean, organized and safe cable routing
- for permanent and temporary electrical installations
- durable materials for demanding conditions
- easy installation without unnecessary effort

A2821
31 15 282 100
50/-/-/7,500
NEW



product: cable cleat ▪ cable diameter: 6 mm ▪ dimensions: 9 × 12 × 6 mm ▪ packaging: 50 pcs, packet ▪ colour: black ▪ UV protection: yes ▪ material: PE ▪ working temperature range: -40°C – 85°C ▪ mounting type: nail

A2822
31 15 282 200
50/-/-/7,500
NEW



product: cable cleat ▪ cable diameter: 6 mm ▪ dimensions: 9 × 12 × 6 mm ▪ packaging: 50 pcs, packet ▪ colour: white ▪ material: PE ▪ working temperature range: -40°C – 85°C ▪ mounting type: nail

A2823
31 15 282 300
50/-/-/5,000
NEW



product: cable cleat ▪ cable diameter: 8 mm ▪ dimensions: 13 × 15 × 7 mm ▪ packaging: 50 pcs, packet ▪ colour: black ▪ UV protection: yes ▪ material: PE ▪ working temperature range: -40°C – 85°C ▪ mounting type: nail

A2824
31 15 282 400
50/-/-/5,000
NEW



product: cable cleat ▪ cable diameter: 8 mm ▪ dimensions: 13 × 15 × 7 mm ▪ packaging: 50 pcs, packet ▪ colour: white ▪ material: PE ▪ working temperature range: -40°C – 85°C ▪ mounting type: nail

A2825
31 15 282 500
50/-/-/5,000
NEW



product: cable cleat ▪ cable diameter: 10 mm ▪ dimensions: 14 × 17 × 7 mm ▪ packaging: 50 pcs, packet ▪ colour: black ▪ UV protection: yes ▪ material: PE ▪ working temperature range: -40°C – 85°C ▪ mounting type: nail

A2826
31 15 282 600
50/-/-/5,000
NEW



product: cable cleat ▪ cable diameter: 10 mm ▪ dimensions: 14 × 17 × 7 mm ▪ packaging: 50 pcs, packet ▪ colour: white ▪ material: PE ▪ working temperature range: -40°C – 85°C ▪ mounting type: nail

A2831
31 15 283 100
25/-/-/5,000
NEW



product: self-adhesive mounting base ▪ dimensions: 20 × 20 mm ▪ packaging: 25 pieces, bag ▪ colour: black ▪ material: ABS ▪ working temperature range: -40°C – 80°C ▪ mounting type: adhesive tape

A2832
31 15 283 200
25/-/-/5,000
NEW



product: self-adhesive mounting base ▪ dimensions: 20 × 20 mm ▪ packaging: 25 pieces, bag ▪ colour: white ▪ material: ABS ▪ working temperature range: -40°C – 80°C ▪ mounting type: adhesive tape

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

A2833 31 15 283 300 — 25/-/-/2,500

NEW

8 592920 154649

Ta -40 ~ +80 °C | 30 × 30 mm



25×

product: self-adhesive mounting base ▪ dimensions: 30 × 30 mm ▪ packaging: 25 pieces, bag ▪ colour: black ▪ material: ABS ▪ working temperature range: -40°C – 80°C ▪ mounting type: adhesive tape

A2834 31 15 283 400 — 25/-/-/2,500

NEW

8 592920 154656

Ta -40 ~ +80 °C | 30 × 30 mm



25×

product: self-adhesive mounting base ▪ dimensions: 30 × 30 mm ▪ packaging: 25 pieces, bag ▪ colour: white ▪ material: ABS ▪ working temperature range: -40°C – 80°C ▪ mounting type: adhesive tape

A2841 31 45 310 410 — 100/-/-/25,000

NEW

8 592920 154663

PA66 Nylon | ↔ 100 mm



100×

product: cable ties ▪ dimensions: 2,5 × 100 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 8 kg ▪ maximum diameter: 22 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2842 31 45 310 420 — 100/-/-/25,000

NEW

8 592920 154670

PA66 Nylon | ↔ 100 mm

100×

product: cable ties ▪ dimensions: 2,5 × 100 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 8 kg ▪ maximum diameter: 22 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2843 31 45 310 430 — 100/-/-/12,000

NEW

8 592920 154687

PA66 Nylon | ↔ 150 mm



100×

product: cable ties ▪ dimensions: 3,5 × 150 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 18 kg ▪ maximum diameter: 35 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2844 31 45 310 440 — 100/-/-/12,000

NEW

8 592920 154694

PA66 Nylon | ↔ 150 mm

100×

product: cable ties ▪ dimensions: 3,5 × 150 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 18 kg ▪ maximum diameter: 35 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2845 31 45 310 450 — 100/-/-/10,000

NEW

8 592920 154700

PA66 Nylon | ↔ 200 mm



100×

product: cable ties ▪ dimensions: 3,5 × 200 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 18 kg ▪ maximum diameter: 53 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2846 31 45 310 460 — 100/-/-/10,000

NEW

8 592920 154717

PA66 Nylon | ↔ 200 mm

100×

product: cable ties ▪ dimensions: 3,5 × 200 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 18 kg ▪ maximum diameter: 53 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2847 31 45 310 470 — 100/-/-/6,000

NEW

8 592920 154724

PA66 Nylon | ↔ 300 mm



100×

product: cable ties ▪ dimensions: 3,5 × 300 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 18 kg ▪ maximum diameter: 80 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2848 31 45 310 480 — 100/-/-/6,000

NEW

8 592920 154731

PA66 Nylon | ↔ 300 mm

100×

product: cable ties ▪ dimensions: 3,5 × 300 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 18 kg ▪ maximum diameter: 80 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

A2849 100/-/-/6,000

31 45 310 490

NEW

PA66 Nylon | ↔ 200 mm




product: cable ties ▪ dimensions: 4,8 × 200 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 22 kg ▪ maximum diameter: 53 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2850 100/-/-/6,000

31 45 310 500

NEW

PA66 Nylon | ↔ 200 mm




product: cable ties ▪ dimensions: 4,8 × 200 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 22 kg ▪ maximum diameter: 53 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2851 100/-/-/5,000

31 45 310 510

NEW

PA66 Nylon | ↔ 250 mm




product: cable ties ▪ dimensions: 4,8 × 250 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 22 kg ▪ maximum diameter: 65 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2852 100/-/-/5,000

31 45 310 520

NEW

PA66 Nylon | ↔ 250 mm




product: cable ties ▪ dimensions: 4,8 × 250 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 22 kg ▪ maximum diameter: 65 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2853 100/-/-/4,000

31 45 310 530

NEW

PA66 Nylon | ↔ 300 mm




product: cable ties ▪ dimensions: 4,8 × 300 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 22 kg ▪ maximum diameter: 82 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2854 100/-/-/4,000

31 45 310 540

NEW

PA66 Nylon | ↔ 300 mm




product: cable ties ▪ dimensions: 4,8 × 300 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 22 kg ▪ maximum diameter: 82 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2855 100/-/-/4,000

31 45 310 550

NEW

PA66 Nylon | ↔ 350 mm




product: cable ties ▪ dimensions: 4,8 × 350 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 22 kg ▪ maximum diameter: 90 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2856 100/-/-/4,000

31 45 310 560

NEW

PA66 Nylon | ↔ 350 mm




product: cable ties ▪ dimensions: 4,8 × 350 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 22 kg ▪ maximum diameter: 90 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2857 25/-/-/1,500

31 45 310 570

NEW

PA66 Nylon | ↔ 450 mm




product: cable ties ▪ dimensions: 7.6 × 450 mm ▪ colour: black ▪ UV protection: yes ▪ tensile strength: 55 kg ▪ maximum diameter: 125 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

A2858 25/-/-/1,500

31 45 310 580

NEW

PA66 Nylon | ↔ 450 mm



product: cable ties ▪ dimensions: 7.6 × 450 mm ▪ colour: white ▪ UV protection: no ▪ tensile strength: 55 kg ▪ maximum diameter: 125 mm ▪ material: PA66 NYLON ▪ working temperature range: -40°C – 85°C ▪ self-extinguishing: EN IEC 60695-2-11 800°C; UL94 V-2

Boxes, covers

- installation materials for walls and plasterboard
- many sizes to choose from, in white and black

A2401.1 1/-/-/50

31 19 240 111

8 584128 128263



product: plastic junction box - ACIDUR IP67 ▪ designed for: on the surface ▪ packaging: 1 pc, no packaging

A2403 1/-/-/20

31 19 240 300

8 585007 331668



product: large plastic junction box - ACIDUR IP67 ▪ designed for: on the surface ▪ packaging: 1 pc, no packaging

A5037 1/-/-/90

31 19 503 700

8 584128 116949



product: uni. box for hollow partitions ▪ designed for: plasterboard ▪ packaging: 1 pc, no packaging

A5038 10/-/-/700

31 19 503 800

8 592920 040041

product: lid ▪ designed for: covering boxes with attachment pitch of 60 mm using fastening screws ▪ dimensions: diameter 75 mm, thickness 3 mm ▪ packaging: 10 pcs, PE packet

A5043 10/-/-/200

31 19 504 300

8 592920 040065

product: lid ▪ designed for: bar (panel) boxes from the Classic or Swing series ▪ packaging: 10 pcs, PE packet

A5047 10/-/-/120

31 19 504 700

8 592920 040164



product: surface instrumentation box ▪ designed for: Classic, Swing, Standard models ▪ dimensions: 80 × 104 × 32 mm ▪ packaging: 10 pcs, no packaging

A5048 10/-/-/120

31 19 504 800

8 592920 040188



product: surface instrumentation box ▪ designed for: Classic, Swing, Standard models ▪ dimensions: 80 × 80 × 32 mm ▪ packaging: 10 pcs, PE packet

A9457 10/-/-/120

31 19 945 700

8 592920 040225



product: universal box under plaster ▪ designed for: possibility of inserting terminal board and screw-less terminals ▪ dimensions: 75 × 75 × 45 mm ▪ packaging: 10 pcs, PE packet

A9457.1 5/-/-/40

31 19 945 711

8 592920 040249



product: rotary junction box with lid under plaster ▪ designed for: creation of large installations (many inputs) ▪ dimensions: 93 × 47 mm ▪ packaging: 5 pcs, PE packet

A9458 10/-/-/350

31 19 945 800

8 592920 040263

product: screw-in junction box lid ▪ designed for: final covering of KU68 boxes ▪ dimensions: 81 × 40 mm in diameter ▪ packaging: 10 pcs, no packaging

Installation material others

- practical installation materials for safe and reliable electrical installations
- durable components made from quality materials for long service
- small accessories such as safety socket covers protect sockets and children

A9000 1/-/-/12

31 99 900 000

8 595025 366245



product: 5× safety cap for sockets + key for the cap ▪ voltage: 4FF53902.431/S ▪ type of mounting: into a socket ▪ version: cap for sockets + key for the cap ▪ colour: white ▪ packaging: 1 pc, hanging

A9820.1 1/-/10/60

31 08 982 011

3 245060 504458

legrand IP44



product: LEGRAND rubber plug for mobile leads ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ children protection: no ▪ IP rating: IP44 ▪ material: rubber ▪ packaging: 1 pc, hanging

A9855.1 1/-/10/60

31 08 985 511

3 245060 504465

legrand IP44



product: # ▪ type: FRENCH ▪ voltage/current: 250 V~/16 A max. ▪ children protection: no ▪ IP rating: IP44 (only in combination with Legrand plug 050445) ▪ material: rubber ▪ packaging: 1 pc, hanging

Transformer solders, copper, rosin

- for DIY and professionals, made in Czech Republic
- suitable for so-called soft soldering, welding smaller parts
- with 125 W input power, 4 soldering tips, LED light
- rosin, soldering tip or tin (1.5 mm diameter) also available

A5102 1/-/-/6

31 47 010 020

8 595025 358875



product: transformer soldering iron - LED lighting ▪ number of soldering tips: 4 ▪ power: 125 W ▪ packaging: 1 pc, blister

A5201 5/-/-/2,500

31 47 020 010

8 595025 358929



product: soldering tip copper for soldering irons 1.3 mm diameter ▪ number of soldering tips: 5 ▪ packaging: 5 pcs, PVC packet

A5301 1/-/-/500

31 47 030 010

8 595025 358950



product: rosin for soldering ▪ packaging: 1 pc, PVC packet

A5401 1/-/-/500

31 47 040 010

8 595025 358899



product: tube lead-free solder filled with active rosin Sn99,3Cu0,7Nip, diameter 1,5mm, approx. 1 ▪ packaging: 1 pc, PVC packet

Tapes

Electroinsulating PVC tapes

- for safe insulation and clear cable marking
- reliable solution for all types of electrical installations
- quality insulation of conductors during installation and repairs
- confidence and protection when working with electrical wiring
- universal use at home and in professional applications

- tape type: PVC
- width: 25 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 25 mm
- packaging: 10 pcs, foil





8 595025 342461

F62512 10/-/-/300

20 01 251 020

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil





8 595025 342317

F61511 10/-/-/360

20 01 151 010

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil





8 595025 342324

F61512 10/-/-/360

20 01 151 020

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil





8 595025 342331

F61513 10/-/-/360

20 01 151 030

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil





8 595025 342348

F61514 10/-/-/360

20 01 151 040

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil





8 595025 342355

F61515 10/-/-/360

20 01 151 050

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 200 mm
- packaging: 10 pcs, foil





8 592920 091425

F61999 10/-/-/200

20 01 192 099

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil





8 595025 342362

F61516 10/-/-/360

20 01 151 060

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



8 595025 342379

F61517 10/-/-/360

20 01 151 070

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



8 592920 055052

F61519 10/-/-/360

20 01 151 090

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 150 mm
- packaging: 10 pcs, foil



8 592920 091449

F615992 10/-/-/360

20 01 151 092

- tape type: PVC
- width: 15 mm
- length: 8 m
- thickness: 0.13 mm
- electric strength - minimum: 2,5 kV/mm
- recommended storage temperature: 10–25 °C
- installation temperature range: 0–80 °C
- adhesive material: rubber
- intended use: hobby, workshop, garden
- packaging: 6 pcs, foil



8 592920 141182

F61590 6/-/108/216

20 01 151 100

- tape type: PVC
- width: 19 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 20 mm
- packaging: 10 pcs, foil



8 595025 342386

F61912 10/-/-/300

20 01 191 020

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 595025 342393

F61921 10/-/-/200

20 01 192 010

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 595025 342409

F61922 10/-/-/200

20 01 192 020

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 595025 342416

F61923 10/-/-/200

20 01 192 030

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 595025 342423

F61924 10/-/-/200

20 01 192 040

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 595025 342430

F61925 10/-/-/200

20 01 192 050

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 595025 342447

F61926 10/-/-/200

20 01 192 060

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 592920 056233

F61927 10/-/-/200

20 01 192 070

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil





8 595025 342454

F61929 10/-/-/200

20 01 192 090

Other tapes

- repair tapes: resistance to weather conditions and strength
- self-vulcanizing tapes: rubber or silicone material
- universal DUCT TAPE: strength, extreme adhesion, waterproof
- reflective tapes: increase biker, pedestrian and pram safety
- double-sided acrylic tapes: high adhesion and flexibility

---

tape type: PE foam ▪ width: 20 mm ▪ length: 3 m ▪ thickness: 1.00 mm ▪ recommended storage temperature: 10–45 °C ▪ installation temperature range: 5–80 °C ▪ ROHS compliant ▪ adhesive material: acrylic ▪ intended use: hobby ▪ packaging: 1 pc, paper box





8 592920 136195

F6090 1/-/-/80

20 05 060 900

EMOS A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

tape type: acrylic double-sided tape ▪ width: 30 mm ▪ length: 3 m ▪ thickness: 2 mm ▪ recommended storage temperature: 10–45 °C ▪ installation temperature range: 5–80 °C ▪ ROHS compliant ▪ adhesive material: acrylic ▪ intended use: hobby ▪ packaging: 1 pc, paper box





NANO REUSABLE · 30 mm · 3 m

8 592920 136201

F6300 20 05 063 000 — 1/-/-/30

---

tape type: PVC base ▪ width: 100 mm ▪ length: 1 m ▪ thickness: 0.7 mm ▪ recommended storage temperature: 10–45 °C ▪ installation temperature range: -25–90 °C ▪ ROHS compliant ▪ UV resistant ▪ adhesive material: synthetic adhesive ▪ intended use: pools, hobby, workshop, garden ▪ packaging: 1 pc, paper box





STRONG ADHESION · 10 cm · 100 cm · UV Resistant

8 592920 135327

F6100 20 05 061 000 — 1/-/-/32

---

tape type: PVC base ▪ width: 100 mm ▪ length: 1 m ▪ thickness: 0.7 mm ▪ recommended storage temperature: 10–45 °C ▪ installation temperature range: -25–90 °C ▪ ROHS compliant ▪ UV resistant ▪ adhesive material: synthetic adhesive ▪ intended use: pools, hobby, workshop, garden ▪ packaging: 1 pc, paper box





STRONG ADHESION · 10 cm · 100 cm · UV Resistant

8 592920 136638

F6110 20 05 061 100 — 1/-/-/32

---

tape type: PE base ▪ width: 50 mm ▪ length: 25 m ▪ thickness: 0.15 mm ▪ recommended storage temperature: 10–45 °C ▪ installation temperature range: -25–90 °C ▪ ROHS compliant ▪ UV resistant ▪ adhesive material: acrylic ▪ intended use: repairs of all types of polycarbonates, repairs of glass panes ▪ packaging: 1 pc, paper box





WEATHER PROOF · 50 mm · 25 m · UV Resistant · 365 days

8 592920 135532

F6200 20 05 062 000 — 1/-/-/30

---

tape type: insect stop repair tape ▪ width: 50 mm ▪ length: 2 m ▪ thickness: 1.00 mm ▪ recommended storage temperature: 5–40 °C ▪ installation temperature range: 5–40 °C ▪ ROHS compliant ▪ UV resistant ▪ adhesive material: hot melt ▪ intended use: hobby, workshop, garden ▪ integrated textile mesh: 70 fibers ▪ dimensions: 105 × 48 mm ▪ packaging: 1 pc, paper box





INSECTS STOP · 50 mm · 2 m · Strong barrier

8 592920 147207

F6210 20 05 062 010 — 1/-/-/60 — NEW

tape type: double side NANOGRID tape ▪ width: 19 mm ▪ length: 3 m ▪ thickness: 2 mm ▪ recommended storage temperature: 5–40 °C ▪ installation temperature range: 5–40 °C ▪ ROHS compliant ▪ UV resistant ▪ adhesive material: acrylic ▪ intended use: hobby ▪ integrated textile mesh: 35 fibers ▪ dimensions: 80 × 20 mm ▪ packaging: 1 pc, paper box





NANO REUSABLE | 19 mm | 3 m | Easy tearing

8 592920 147184

F6301
20 05 063 010

1/-/-/60
NEW

---

tape type: double side DUCT tape ▪ width: 50 mm ▪ length: 10 m ▪ thickness: 1.00 mm ▪ recommended storage temperature: 5–40 °C ▪ installation temperature range: 5–40 °C ▪ ROHS compliant ▪ UV resistant ▪ adhesive material: hot melt ▪ intended use: hobby ▪ integrated textile mesh: 70 fibers ▪ dimensions: 110 × 50 mm ▪ packaging: 1 pc, paper box





STRONG BONDING | 50 mm | 10 m | Easy tearing | 70×

8 592920 147160

F6302
20 05 063 020

1/-/-/30
NEW

---

tape type: asphalt textile tape ▪ width: 15 mm ▪ length: 15 m ▪ thickness: 0.4 mm ▪ electric strength - minimum: 1 kV/mm ▪ recommended storage temperature: -5 °C to +40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: asphalt ▪ integrated textile mesh ▪ dimensions: 80 × 17 mm ▪ packaging: 1 pc, PVC hanging





0.4 mm | 15 mm | 15 m | Water resistance

8 595025 311177

F6515
20 02 151 520

1/-/-/60

---

tape type: asphalt textile tape ▪ width: 19 mm ▪ length: 10 m ▪ thickness: 0.4 mm ▪ electric strength - minimum: 1 kV/mm ▪ recommended storage temperature: -5 °C to +40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: asphalt ▪ integrated textile mesh ▪ dimensions: 70 × 17 mm ▪ packaging: 1 pc, PVC hanging





0.4 mm | 19 mm | 10 m | Water resistance


8 595025 311566

F6910
20 02 191 020

1/-/-/60

---

tape type: self-amalgamating tape ▪ width: 25 mm ▪ length: 5 m ▪ thickness: 0.76 mm ▪ electric strength - minimum: 14 kV/mm ▪ recommended storage temperature: -50 °C to +95 °C ▪ installation temperature range: 5–95 °C ▪ adhesive material: rubber ▪ intended use: sealing, repairs ▪ dimensions: 95 × 28 mm ▪ packaging: 1 pc, paper box





0.76 mm | 25 mm | 5 m | 5–95 °C | 14 kV/mm

8 595025 361561

F52502
20 03 250 520

1/-/5/30

tape type: silicone vulcanisation ▪ width: 25 mm ▪ length: 3 m ▪ thickness: 0.60 mm ▪ electric strength - minimum: 8 kV/mm ▪ flame tests: less than 1 second ▪ installation temperature range: -60–260 °C ▪ UV resistant ▪ creates pressure-tight joint ▪ intended use: hobby, workshop, garden, repair in vehicle engine compartment, emergency repair of pipes, hoses ▪ dimensions: 60 × 30 mm ▪ packaging: 1 pc, blister





0.60 mm | 25 mm | 3 m | -60 – 260 °C | UV Resistant | 8 kV/mm

8 592920 033753

F52503 1/-/20/80

20 03 250 320

---

tape type: self-amalgamating tape ▪ width: 19 mm ▪ length: 10 m ▪ thickness: 0.76 mm ▪ electric strength - minimum: 14 kV/mm ▪ recommended storage temperature: -50 °C to +95 °C ▪ installation temperature range: 5–95 °C ▪ adhesive material: rubber ▪ intended use: sealing, repairs ▪ dimensions: 120 × 20 mm ▪ packaging: 1 pc, paper box





0.76 mm | 19 mm | 10 m | 5–95 °C | 14 kW/mm

8 595025 361554

F51912 1/-/5/30

20 03 191 020

---

tape type: universal adhesive DUCT TAPE ▪ width: 48 mm ▪ length: 10 m ▪ thickness: 0.21 mm ▪ recommended storage temperature: -20 °C to +80 °C ▪ installation temperature range: 5–80 °C ▪ UV resistant ▪ adhesive material: synthetic rubber ▪ intended use: hobby, workshop, garden ▪ integrated textile mesh: 70 fibers ▪ dimensions: 105 × 48 mm ▪ packaging: 10 pcs, display box





0.21 mm | 48 mm | 10 m | 70+ | UV Resistant | Non toxic | 5–80 °C


8 592920 036082

F6030 10/-/-/50

20 02 502 002

---

tape type: LDPE (low-density polyethylene) warning tape ▪ width: 75 mm ▪ length: 250 m ▪ thickness: 0.03 mm ▪ recommended storage temperature: 5–30 °C ▪ installation temperature range: 5–30 °C ▪ UV resistant ▪ intended use: border of excavations, demarcation of building spaces, sports tracks, various dangerous locations ▪ dimensions: 140 × 75 mm ▪ packaging: 1 pc, paper unwinding mechanism





0.03 mm | 75 mm | 250 m | 5–30 °C | UV Resistant

8 592920 023662

F87525 1/-/-/18

20 04 752 500

---

tape type: acrylic double-sided tape ▪ width: 12 mm ▪ length: 3 m ▪ thickness: 1.00 mm ▪ recommended storage temperature: 5–40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: acrylic ▪ intended use: hobby, workshop, garden ▪ dimensions: 88 × 12 mm ▪ packaging: 1 pc, blister





1.00 mm | 12 mm | 3 m | 5–40 °C | UV Resistant | max. 2 kg/30 cm | Water resistance

8 592920 033975

F6060 1/-/10/60

20 06 000 000

tape type: acrylic double-sided tape ▪ width: 18 mm ▪ length: 3 m ▪ thickness: 1.00 mm ▪ recommended storage temperature: 5–40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: acrylic ▪ intended use: hobby, workshop, garden ▪ dimensions: 88 × 18 mm ▪ packaging: 1 pc, blister







8 592920 052860

F6080
20 06 000 010

1/-/10/60

---

tape type: reflexive safety tape ▪ width: 25 mm ▪ length: 2 m ▪ thickness: 0.19 mm ▪ recommended storage temperature: -20 °C to +80 °C ▪ installation temperature range: -25–90 °C ▪ UV resistant ▪ adhesive material: rubber ▪ intended use: hobby, cycling, safety element ▪ dimensions: 53 × 53 × 25 mm ▪ packaging: 12 pcs, display box







8 592920 041055

F6070
20 05 000 010

12/-/-/216

Order Code	Item Number	page
A0207	90 23 009 850	505
A0209	90 23 009 920	505
A0214	90 23 010 250	505
A0216	90 23 010 320	505
A0221	90 23 010 650	505
A0223	90 23 010 710	505
A0227	90 23 011 250	504
A0232	90 23 011 950	504
A0242	90 23 014 550	504
A0243	90 23 014 620	504
A0250	90 23 015 150	504
A0252	90 23 015 220	504
A0260	90 23 016 800	505
A0264	90 23 017 100	505
A0267	90 23 017 500	506
A0268	90 23 017 800	506
A0271	90 23 018 200	506
A0273	90 23 019 000	506
A0279	90 23 019 900	506
A0282	90 23 020 101	506
A1208	31 07 120 800	503
A1209	31 07 120 900	503
A1396	31 04 139 600	497
A1396.1	31 04 139 611	497
A1396.2	19 50 011 207	498
A1396.3	19 50 010 207	497
A1396.4	19 50 010 208	497
A1397	31 04 139 700	498
A1397.1	31 04 139 711	498
A1397.2	19 50 010 205	498
A1397.3	19 50 010 206	498
A1397.4	19 50 011 205	498
A1397.5	19 50 011 206	498
A1398	31 04 139 800	497
A1398.1	31 04 139 811	497
A1398.2	19 50 011 202	497
A1398.3	19 50 011 203	498
A1398.4	19 50 011 204	498
A1399	19 50 011 201	497
A1602	31 08 160 200	503
A2201	31 14 220 100	508
A2401.1	31 19 240 111	513
A2403	31 19 240 300	513
A2821	31 15 282 100	510
A2822	31 15 282 200	510
A2823	31 15 282 300	510
A2824	31 15 282 400	510
A2825	31 15 282 500	510
A2826	31 15 282 600	510
A2831	31 15 283 100	510
A2832	31 15 283 200	510
A2833	31 15 283 300	511
A2834	31 15 283 400	511
A2841	31 45 310 410	511
A2842	31 45 310 420	511
A2843	31 45 310 430	511
A2844	31 45 310 440	511
A2845	31 45 310 450	511
A2846	31 45 310 460	511
A2847	31 45 310 470	511
A2848	31 45 310 480	511
A2849	31 45 310 490	512
A2850	31 45 310 500	512
A2851	31 45 310 510	512
A2852	31 45 310 520	512
A2853	31 45 310 530	512
A2854	31 45 310 540	512
A2855	31 45 310 550	512
A2856	31 45 310 560	512
A2857	31 45 310 570	512
A2858	31 45 310 580	512
A3004	31 16 300 400	434
A3010	31 16 301 000	434
A3366	31 16 336 600	434
A3369	31 16 336 900	434
A4101	31 46 001 040	509
A4102	31 46 001 060	509
A4103	31 46 001 100	509
A4105	31 46 011 040	509
A4106	31 46 011 060	509
A4107	31 46 011 100	509
A5037	31 19 503 700	513
A5038	31 19 503 800	513
A5043	31 19 504 300	513
A5047	31 19 504 700	513
A5048	31 19 504 800	513
A5102	31 47 010 020	515
A5201	31 47 020 010	515
A5301	31 47 030 010	515
A5401	31 47 040 010	515
A6000.3	19 06 010 507	495
A6000.4	19 06 010 511	496
A6000.5	19 06 010 512	493
A6000.6	19 06 010 514	496
A6000.7	19 06 010 513	494
A6001.0	19 06 010 502	496
A6001.1	19 06 010 503	496
A6001.2	19 06 010 508	496
A6001.3	19 06 010 509	496
A6002.0	19 06 010 504	493
A6002.2	19 06 010 510	495
A6003.0	19 06 300 103	494
A6003.1	19 06 300 109	496
A6004.0	19 06 300 102	494
A6004.1	19 06 300 101	494
A6004.2	19 06 300 100	494
A6004.3	19 06 300 104	494
A6004.4	19 06 300 105	494
A6004.5	19 06 300 108	495
A6004.6	19 06 300 107	495
A6004.7	19 06 300 106	495
A6004.8	19 06 300 110	496
A6004.9	19 06 300 111	496
A6100.0	19 06 200 100	493
A6100.1	19 06 200 101	493
A6100.2	19 06 200 102	494
A6100.3	19 06 200 103	494
A6100.4	19 06 200 104	494
A6100.5	19 06 200 105	495
A6100.6	19 06 200 106	495
A6100.7	19 06 200 107	495
A6100.8	19 06 200 108	495
A6100.9	19 06 200 109	495
A6110	31 05 213 050	396
A6111	31 05 213 051	396
A6114	31 05 213 054	396
A6115	31 05 213 055	396
A6210	31 06 213 240	395
A6211	31 06 213 241	395
A6212	31 06 213 242	395
A6213	31 06 213 243	395
A6310	31 06 213 150	395
A6311	31 06 213 151	396
A6312	31 06 213 152	395
A6313	31 06 213 153	396
A9000	31 99 900 000	514
A9101	31 14 991 010	508
A9102	31 14 991 020	508
A9103	31 14 991 030	508
A9104	31 14 991 040	508
A9111	31 14 991 110	508
A9112	31 14 991 120	509
A9113	31 14 991 130	509
A9121	31 14 991 210	509
A9457	31 19 945 700	513
A9457.1	31 19 945 711	514
A9458	31 19 945 800	514
A9820.1	31 08 982 011	514
A9855.1	31 08 985 511	514
B01102	10 13 102 002	10
B0110L	10 13 122 001	11
B01114	10 13 124 200	10
B0111G	10 13 121 001	11
B01138	10 13 128 001	10
B0114T	10 13 101 201	11
B01202	10 13 202 002	11
B0120L	10 13 222 001	12
B01214	10 13 224 200	11
B0121G	10 13 221 001	12
B01238	10 13 228 001	12
B0124T	10 13 201 201	12
B0125T	10 13 800 000	14
B01302	10 13 302 001	12
B01304	10 13 304 001	13
B01312	10 13 322 200	13
B01402	10 13 402 001	13
B01404	10 13 404 001	13
B01412	10 13 422 200	13
B01501	10 13 501 001	17
B01511	10 13 521 200	16
B02112	10 14 122 000	7
B02114	10 13 124 100	8
B0211V	10 13 126 000	8
B0212F	10 14 120 120	8
B02138	10 14 128 000	8
B02212	10 14 222 000	8
B02214	10 13 224 100	9
B0221V	10 13 226 000	9
B0222F	10 14 220 120	9
B02238	10 14 228 000	9
B02312	10 13 322 100	9
B02412	10 13 422 100	10
B02511	10 13 521 100	16
B03112	10 13 122 000	5
B03114	10 13 124 000	5
B03116	10 17 126 000	6
B0314G	10 17 101 000	6
B03212	10 13 222 000	6
B03214	10 13 224 000	6
B03216	10 17 226 000	6
B0324G	10 17 201 000	7
B03312	10 13 322 000	7
B03412	10 13 422 000	7
B03511	10 13 521 000	16
B0410G	10 24 130 100	15
B04114	10 24 114 000	14
B0412L	10 24 110 200	15
B04138	10 24 118 000	14
B0420G	10 24 230 100	15
B04214	10 24 214 000	15
B0422L	10 24 210 200	16
B04238	10 24 218 000	15
B0531B	16 13 053 100	62
B0532B	16 13 053 200	63
B0545B	16 13 054 500	62
B0551BL	16 13 055 100	63
B0551GY	16 13 055 101	63
B0551S	16 13 055 102	63
B0552AG	16 13 055 201	64
B0552RG	16 13 055 200	63
B0555BL	16 13 055 502	64
B0555GY	16 13 055 501	64
B0560B	16 13 056 000	64
B0561B	16 13 056 100	64
B0571B	16 13 057 100	65
B0572B	16 13 057 200	65
B1110	10 11 102 000	19
B11202	10 11 202 001	20
B12104	10 12 104 000	17
B1210F	10 12 109 002	18
B1211	10 12 114 000	17
B1220	10 12 204 000	18
B1220F	10 12 209 002	18
B1221	10 12 214 000	18
B1230	10 12 302 000	18
B1231	10 12 312 000	19
B1240	10 12 402 000	19
B1241	10 12 412 000	19
B1250	10 12 501 000	20
B1251	10 12 511 000	20
B1300	10 21 002 315	33
B13001	10 21 002 311	33
B1301	10 21 002 715	34
B13011	10 21 002 711	33
B1302	10 21 001 115	35
B13021	10 21 001 111	35
B1303	10 21 047 612	35
B1305	10 21 091 012	34
B1306	10 21 002 512	34
B1325	10 41 062 511	39
B1360	10 13 601 000	14
B1376	10 41 007 615	37
B13762	10 41 007 611	36
B13763	10 41 007 601	39
B13763UP	10 41 007 623	36
B1386	10 41 018 610	40
B13861	10 41 018 611	39
B1389	10 41 018 910	37
B13892	10 41 018 911	37
B13921	10 41 019 211	37
B13925	10 41 019 205	38
B1395	10 21 002 515	36
B13951	10 21 002 911	35
B1501	10 22 000 111	21
B15012U	10 22 000 112	22
B1502	10 22 000 211	23
B1505	10 22 000 511	23
B1506	10 22 000 611	21
B1509	10 22 000 911	23
B15101	10 42 102 511	30
B15112	10 22 000 412	22
B1516	10 42 201 615	26
B15161	10 42 201 611	25
B15163UP	10 42 201 623	25
B1520	10 42 122 015	24
B15201	10 42 122 011	24
B15212	10 22 000 711	22
B15221	10 42 122 511	31
B15231	10 42 235 411	31
B1525	10 42 202 515	27
B15251	10 42 202 511	26
B15253UP	10 42 202 523	26
B15254	10 42 202 514	26
B1530	10 42 243 015	28
B15301	10 42 243 011	28
B1532	10 42 203 215	27
B15322	10 42 203 211	27
B15323UP	10 42 203 223	27
B15324	10 42 203 214	27
B15325UP	10 42 203 225	28
B15331	10 42 303 211	32
B15431	10 42 232 511	31
B15441	10 42 233 011	31
B15451	10 42 232 011	31
B1560	10 42 161 615	32
B15601	10 42 161 611	24
B1565	10 42 121 615	30
B15651	10 42 121 611	30
B1570	10 42 162 015	25
B15701	10 42 162 011	25
B15711	10 42 103 011	30
B15771	10 42 247 711	32
B1585	10 42 245 015	28
B15851	10 42 245 011	28
B1595	10 42 163 215	32
B15951	10 42 163 221	25
B25112	10 32 122 090	44
B25114	10 32 124 090	45
B2511V	10 32 126 090	45
B25162	10 32 122 062	44
B25184	10 32 124 081	45
B25186	10 32 126 082	45
B25212	10 32 222 211	46
B25214	10 32 224 210	46
B25216	10 32 226 214	46
B2521V	10 32 226 212	47
B25232	10 32 222 131	45
B25272	10 32 222 260	46
B25274	10 32 224 260	46
B2527V	10 32 226 260	47
B2533	10 32 322 301	47
B2543	10 32 422 300	47
B2552	10 32 521 021	48
B26184	10 32 124 080	43
B2618V	10 32 126 080	43
B26204	10 32 224 200	43
B2620V	10 32 226 200	44
B2629	10 32 224 201	44
B27186	10 32 126 081	48
B27216	10 32 226 213	48
B30234	10 21 230 003	34
B30764	10 41 760 014	38
B3164G	10 41 016 411	39
B3176G	10 41 007 610	37
B3177G	10 41 017 711	40
B3191G	10 41 019 110	40
B3192G	10 41 019 210	38
B32164	10 42 201 604	26
B32254	10 42 202 524	29
B32304	10 42 243 014	29
B32324	10 42 203 224	29
B32854	10 42 245 014	29
B3357F1	10 43 035 721	41
B3389F1	10 43 038 921	41
B3392F1	10 43 039 221	41
B35106	10 44 001 026	42
B35126	10 44 031 206	42
B35136	10 44 001 306	42
B35756	10 44 067 506	42
B50224	16 04 822 110	58
B50434	16 04 842 301	58
B50439	16 04 842 300	58
B50444D	16 04 844 112	58
B50457	16 04 845 210	59
B50460D	16 04 846 114	59
B50630	16 04 863 101	59
B50829	16 04 882 110	59
B534530	16 04 845 300	60
B53457P	16 04 845 114	59
B56499	16 04 849 120	57
B6320GY	16 11 632 000	61
B6405GY	16 11 640 500	61
B6410BE	16 11 641 000	61
B6410BL	16 11 641 001	62
B6420B	16 11 642 000	62
B7332	13 26 023 205	52
B7414	13 32 112 040	51
B7426	13 32 212 030	51
B7811	13 21 112 000	49
B7821	13 21 212 000	49
B7911	13 20 114 000	50
B79118	13 20 118 000	50
B7921	13 20 214 000	50
B79218	13 20 218 000	51
B9641	12 01 000 100	53
B9651	12 01 000 500	53
B9652	12 01 000 600	53
B9653	12 01 000 700	54
B9654	12 01 000 800	54
B9655	12 01 000 900	54
B9656	12 01 000 850	54
B9656V	12 01 004 800	54
B9659	12 01 000 520	53
B9672	12 01 002 600	53
B9674	12 01 002 800	54
B9675	12 01 002 900	54
B9679	12 01 003 300	54
B9682	12 01 003 500	53
B9683	12 01 003 600	54
B9684	12 01 003 700	55
B9685	12 01 003 800	55
B9691	12 01 004 300	54
C0024	28 04 000 013	455
C0025	28 04 000 014	455
C0030	28 04 000 030	455
C2454.3	31 32 245 430	166
C2608.1	31 32 260 813	164
C2611.4	31 32 260 802	165
C2611.5	31 32 260 812	165
C3101.2	31 32 310 120	166
C3454.1	31 32 345 410	166
C3605.4	31 32 360 540	164
C3606.3	31 32 360 630	165
C3607.7	31 32 360 770	165
C3607.8	31 32 360 780	165
C3608.4	31 32 360 840	165
C3608.5	31 32 360 850	165
C3613.1	31 32 361 310	165
C3613.2	31 32 361 320	165
C3613.3	31 32 361 330	165
C5109	31 32 510 900	157
D3ZC01	15 50 032 009	300
D3ZW01	15 50 030 032	300
D5AC01	15 50 052 004	301
D5AM01	15 50 054 006	301
D5AP01	15 50 055 002	301
D5AW01	15 50 050 004	301
D730420	19 50 730 420	507
D730421	19 50 730 421	507
D730422	19 50 730 422	507
D730423	19 50 730 423	507
D730427	19 50 730 427	507
D730429	19 50 730 429	507
DCCV07	15 50 001 006	303
DCCV11	15 50 001 010	304
DCCV12	15 50 001 011	304
DCCV13	15 50 001 012	304
DCCV16	15 50 001 031	304
DCCV17	15 50 001 032	303
DCCV19	15 50 000 056	304
DCCV20	15 50 000 057	304
DCCV21	15 50 001 024	304
DCCV22	15 50 001 029	304
DCCV25	15 50 000 196	303
DCCW05	15 50 000 181	303
DCLV01	15 50 001 013	303
DCLV02	15 50 001 014	303
DCPV01	15 50 001 023	302
DCPW01	15 50 000 002	302
DCPW02	15 50 000 001	302
DCPZ01	15 50 005 000	302
DCH001	15 50 090 001	305
DCH002	15 50 090 002	305
E00032	26 03 209 000	313
E00387	26 93 000 240	314
E0041	26 03 013 000	312
E0042	26 03 118 000	312
E0086	26 18 002 600	323
E0090	26 18 002 700	323
E0091	26 18 002 800	323
E0114N	26 03 124 000	310
E0121	26 03 016 001	311
E0129	26 03 119 002	311
E0202	26 05 004 000	318
E03070	26 93 000 180	313
E0345	26 03 203 000	310
E0352	26 06 166 000	309
E0422	26 03 016 002	312
E05018	26 93 000 120	313
E0522	26 03 204 000	310
E0531	26 06 180 000	309
E0558	26 03 206 000	311
E0558P	26 03 207 000	312
E0558W	26 03 208 000	311
E06000	26 93 000 250	314
E06016	26 93 000 230	314
E06018	26 93 000 220	313
E2157	26 03 015 000	318
E30300	26 27 303 000	319
E3070	26 06 139 000	308
E5111	26 06 170 000	307
E6000	26 06 188 000	307
E6001	26 06 187 000	306
E6016	26 06 164 000	307
E6018	26 06 162 000	307
E6210	26 03 205 000	311
E8010	26 06 179 000	309
E8610	26 06 183 000	306
E8614	26 06 182 000	308
E8620	26 06 181 000	308
E8625	26 06 186 000	309
E8636	26 03 119 003	312
E8647N	26 06 184 000	308
E8647W	26 06 185 000	308
EV012	26 17 001 200	317
EV014	26 17 001 400	316
EV014B	26 17 001 401	316
EV016	26 17 001 600	317
EV020	26 17 002 000	318
EV023	26 17 002 300	317
EV025	26 17 002 500	317
EV026	26 17 000 500	317
EV029	26 17 002 600	318
EV104	26 17 010 400	316
EV105	26 17 010 500	316
EV106	26 17 010 600	315
EV112	26 17 010 902	315
F51912	20 03 191 020	523
F52502	20 03 250 520	522
F52503	20 03 250 320	523
F6030	20 02 502 002	523
F6060	20 06 000 000	523
F6070	20 05 000 010	524
F6080	20 06 000 010	524
F6090	20 05 060 900	520
F6100	20 05 061 000	521
F6110	20 05 061 100	521
F61511	20 01 151 010	516
F61512	20 01 151 020	516
F61513	20 01 151 030	517
F61514	20 01 151 040	517
F61515	20 01 151 050	517
F61516	20 01 151 060	517
F61517	20 01 151 070	518
F61519	20 01 151 090	518
F61590	20 01 151 100	518
F615992	20 01 151 092	518
F61912	20 01 191 020	518
F61921	20 01 192 010	519
F61922	20 01 192 020	519
F61923	20 01 192 030	519
F61924	20 01 192 040	519
F61925	20 01 192 050	519
F61926	20 01 192 060	520
F61927	20 01 192 070	520
F61929	20 01 192 090	520

Order Code	Item Number	page
F61999	20 01 192 099	517
F6200	20 05 062 000	521
F6210	20 05 062 010	521
F62512	20 01 251 020	516
F6300	20 05 063 000	521
F6301	20 05 063 010	522
F6302	20 05 063 020	522
F6515	20 02 151 520	522
F6910	20 02 191 020	522
F87525	20 04 752 500	523
G1110	14 54 007 100	288
G1120	14 54 007 200	288
G1125	14 54 007 250	288
G1150	14 54 009 200	289
G1210	14 54 014 100	291
GS11111	14 54 008 200	289
GS11151	14 54 015 200	289
GS11A51	14 54 000 400	289
GS11B51	14 54 000 500	290
GS12111	14 54 016 100	290
GS13142	14 54 000 100	289
GS14151	14 54 000 600	290
GS14251	14 54 000 700	290
GS15114	15 45 000 900	291
GS15117	14 54 000 800	290
GS21111	14 54 017 100	292
GS22111	14 54 013 200	291
GS31111	14 54 000 200	291
GS32111	14 54 000 300	292
GS41151	14 54 000 110	292
H1085	30 10 000 291	454
H1086	30 10 000 292	454
H1087	30 10 000 293	453
H1088	30 10 000 294	454
H2017	30 10 002 017	453
H2020	30 10 002 020	454
H2050	30 10 002 050	453
H2060	30 10 002 060	453
H3010	30 10 003 010	452
H3015	30 10 003 015	452
H3016	30 10 003 016	452
H3017	30 10 003 017	452
H3018	30 10 003 018	453
H4020	30 10 040 200	450
H4021	30 10 040 210	450
H4030	30 10 040 300	450
H4031	30 10 040 310	450
H4033	30 10 040 330	449
H4034	30 10 040 340	449
H4052	30 24 040 520	456
H4056	30 24 040 560	458
H4062	30 24 040 620	456
H4067	30 24 040 670	457
H4072	30 24 040 720	456
H4073	30 24 040 730	457
H4074	30 24 040 740	458
H4080	30 10 040 800	450
H4081	30 10 040 810	451
H4082	30 10 040 820	451
H4083	30 10 040 830	451
H4084	30 10 040 840	451
H4167	30 24 041 670	457
H4168	30 24 041 680	457
H4170	30 24 041 700	458
H4173	30 24 041 730	457
H5002	30 69 050 020	448
H5011	30 69 050 110	499
H5014	30 69 050 140	499
H5015	30 69 050 150	499
H5016	30 69 050 160	499
H5020	30 69 052 010	287
H5022	30 69 052 030	448
H5023	30 69 050 230	470
H5024	30 69 052 040	287
H5025	30 69 052 050	288
H5030	30 69 050 300	459
H5103	30 69 051 030	500
H5104	30 69 051 040	500
H5107	30 69 051 070	500
H5108	30 69 051 080	500
H5109	30 69 051 090	501
H5110	30 69 051 100	501
H5121	30 69 051 210	501
H5125	30 69 051 250	501
H5126	30 69 051 260	501
H5127	30 69 051 270	502
H5128	30 69 051 280	502
H5129	30 69 051 290	502
H5131	30 69 051 310	502
H5132	30 69 051 320	502
H6001	26 31 600 100	321
H6002	26 31 600 200	320
H6004	26 31 600 400	320
H6006	26 31 600 600	320
H6101	26 31 610 100	322
H6102	26 31 610 200	321
H6901	26 31 690 100	321
H6901	26 31 690 100	322
H6902	26 31 690 200	322
H6903	26 31 690 300	321
H7009	30 70 000 009	455
H8013	30 80 000 013	455
H8106	30 81 000 010	459
J0102	25 04 500 110	444
J0103	25 04 600 110	444
J0104	25 04 700 110	444
J0197	25 03 000 100	443
J0198	25 03 000 400	443
J0199	25 04 200 100	443
J0200	25 01 000 100	442
J0203	25 01 000 200	442
J0220J	25 01 100 100	442
J0222	25 01 100 300	441
J0240	25 01 000 300	441
J0240E	25 01 000 330	441
J0260	25 01 000 400	441
J0400	25 06 000 800	446
J0401	25 12 000 100	412
J0665	27 03 105 000	439
J0666	27 03 106 000	439
J0669	27 04 280 010	439
J0680	27 04 030 000	439
J0685	27 02 029 000	438
J0690	27 04 039 000	439
J0701	27 02 031 000	435
J0703	27 02 033 000	435
J0704	27 02 034 000	436
J0705	27 02 035 000	436
J0708	27 02 038 000	436
J0709	27 02 039 000	436
J0801	27 04 310 000	438
J0802	27 04 320 000	437
J0803	27 04 330 000	437
J0804	27 04 340 000	437
J0806	27 04 350 000	437
J0906	27 04 560 000	438
J0907	27 04 570 000	438
J50988	25 20 900 088	440
J50989	25 20 900 089	440
J5709	25 08 000 810	445
J5710	25 08 000 900	445
J5711	25 08 100 100	445
J5712	25 08 100 200	445
J5802	25 07 100 600	445
J5803	25 07 100 700	444
J5810	17 02 010 035	446
J58133	17 02 010 034	446
J60030	25 21 000 030	447
J60110	25 21 000 110	447
J60130	25 21 000 130	447
J6014	25 20 236 400	440
J60140	25 21 000 140	447
J60170	25 21 000 170	447
K0101	18 21 000 100	411
K0102	18 21 000 500	411
K0103	18 21 000 700	411
K0141	18 21 000 400	411
K0151	18 21 000 600	412
K0201	18 21 100 100	411
K0202	18 21 100 200	411
K0301	18 21 000 800	412
K0311	18 21 100 300	412
K0312	18 21 100 301	412
K1331	18 04 100 100	412
K1331.2	18 04 100 701	415
K1421	18 04 100 300	413
K1421.2	18 04 100 702	415
K1451	18 04 100 500	412
K1451.2	18 04 100 703	415
K1731	18 04 000 100	413
K1731.2	18 04 000 600	414
K1821	18 04 000 300	413
K1821.2	18 04 000 601	414
K1851	18 04 000 500	414
K1851.2	18 04 000 602	414
K7311	18 07 100 300	413
K7321	18 07 100 400	413
K7321.2	18 07 100 800	415
K7331	18 07 100 500	413
K7331.2	18 07 100 801	415
K7351	18 07 100 700	413
K7351.2	18 07 100 802	415
K9304	18 11 000 200	414
KE1212	32 33 012 120	328
KE1242	32 33 012 420	328
KE1282	32 33 012 820	327
KE2981	32 33 029 810	327
KE4910	32 33 049 100	327
KE4911	32 33 049 110	327
KE4912	32 33 049 120	327
KE4913	32 33 049 130	326
KE4914	32 33 049 140	326
KE4916	32 33 049 160	326
KE4922	32 33 049 220	326
KE6821	32 33 068 300	328
KT01C	32 32 301 000	325
KT01F	32 32 101 000	324
KT01T	32 32 201 000	324
KT02C	32 32 302 000	325
KT02F	32 32 102 000	324
KT02T	32 32 202 000	325
KT03C	32 32 303 000	325
KT03F	32 32 103 000	324
KT03T	32 32 203 000	325
M0003BN	22 01 024 000	476
M0007AN	22 05 000 020	477
M0012AN	22 01 022 000	475
M0014AN	22 01 023 000	476
M0016	22 01 017 000	476
M0017	22 01 018 000	476
M0018N	22 01 020 000	475
M0048N	22 01 021 000	475
M0049N	22 01 026 000	477
M0071N	22 01 025 000	476
M0230N	22 02 022 000	472
M0305N	22 02 027 000	473
M0320N	22 02 029 000	473
M0391N	22 02 030 000	474
M0400N	22 02 028 000	473
M0420N	22 02 031 000	474
M0430N	22 02 023 000	472
M0501N	22 06 000 050	478
M0502	22 06 000 020	477
M0503N	22 06 000 040	477
M2092N	22 02 032 000	474
M3216N	22 02 024 000	472
M3620N	22 02 025 000	473
M3691N	22 02 026 000	473
N0322	22 03 003 000	475
N1014	16 06 025 000	68
N1015	16 08 000 001	69
N3110N	17 03 060 022	67
N3111N	17 03 100 022	68
N3112N	17 03 150 022	68
N3113N	17 03 225 022	68
N9221	16 03 026 000	60
N9321	16 03 027 000	60
N9361	16 03 030 000	60
P0003C	19 04 030 000	383
P0004C	19 04 040 000	383
P0023N	19 05 030 070	390
P00242	19 25 030 020	390
P0024FR	19 05 030 080	390
P0024N	19 05 030 023	390
P0025	19 05 030 030	389
P00252N	19 25 020 000	390
P0026	19 05 030 040	389
P00262	19 25 030 040	389
P0026S	19 05 130 003	389
P0027	19 05 110 000	389
P00271	19 05 110 002	389
P00272	19 25 030 050	389
P00282	19 25 030 060	389
P0028N	19 05 020 020	389
P0029	19 05 130 000	389
P00292	19 25 030 090	388
P0030	19 05 030 050	388
P0034	19 06 110 200	386
P0035	19 06 100 020	386
P0037	19 06 100 040	387
P0038	19 06 110 300	386
P0039	19 06 100 050	386
P0040	19 05 040 001	388
P0042	19 06 010 100	387
P0044	19 06 010 300	387
P0045	19 06 010 400	387
P0047	19 26 010 100	386
P0049	19 26 010 200	386
P0050	19 06 100 060	386
P0055E	19 10 001 000	390
P0055U	19 10 001 100	391
P0056N	19 10 000 900	390
P0056U	19 10 001 200	391
P0062	19 05 120 000	388
P0063	19 05 120 010	388
P0066	19 06 100 090	386
P0067	19 05 110 001	391
P0068	19 05 111 001	392
P0069	19 05 120 030	392
P0070	19 05 120 040	392
P0072	19 05 010 003	388
P0073	19 05 120 040	388
P0074	19 05 010 005	388
P0075	19 25 010 000	388
P0076PD	19 05 020 030	388
P0077PD	19 25 020 001	387
P0078	19 05 120 050	387
P0110	19 01 011 000	346
P0110R	19 01 011 004	344
P0111	19 01 010 150	344
P01110	19 01 811 005	345
P0112	19 01 010 200	344
P01120	19 01 012 000	344
P01125	19 01 012 500	345
P0113	19 01 010 300	346
P01130	19 01 013 000	345
P0113R	19 01 010 302	344
P01140	19 01 014 000	345
P0115	19 01 010 500	346
P0115R	19 01 010 504	344
P0115RZ	19 01 010 505	344
P0115Z	19 12 310 500	346
P0117	19 01 010 700	346
P0117R	19 01 010 701	344
P0120R	19 21 011 002	359
P0121	19 22 010 150	360
P01210R	19 21 811 005	360
P01215R	19 21 011 502	360
P0122	19 21 010 202	360
P01220R	19 21 012 001	360
P01225R	19 21 012 500	360
P01230R	19 21 013 001	360
P0123R	19 21 010 302	359
P0125R	19 21 010 503	359
P0127R	19 21 010 701	359
P01301	19 02 010 150	347
P01303	19 02 010 300	347
P01305	19 02 010 501	347
P01320R	19 01 012 016	347
P01410W	19 01 611 000	343
P01420W	19 01 612 000	343
P01510W	19 21 611 000	359
P01520W	19 21 612 000	359
P01705	19 02 010 500	343
P01710	19 01 211 000	343
P01710R	19 01 011 003	342
P01720	19 01 212 000	343
P01725R	19 01 012 504	342
P01730	19 01 213 000	343
P01805	19 21 010 504	357
P01810	19 21 031 000	357
P01810R	19 21 011 003	358
P01820	19 21 032 000	358
P01825R	19 21 012 502	358
P01830	19 21 033 000	358
P02114	19 02 020 141	334
P0211E	19 02 020 142	334
P0212	19 02 020 201	335
P0212CQ	19 02 120 200	334
P0212U	19 02 020 200	334
P0213	19 02 020 300	339
P02214E	19 22 020 141	355
P0221U	19 02 020 150	355
P0222CQ	19 22 120 200	356
P0300N	19 03 030 001	348
P0300T	19 03 030 002	348
P0310	19 02 031 000	339
P0310R	19 02 031 008	335
P0311	19 02 030 150	335
P0312	19 02 030 200	335
P0313	19 02 030 300	339
P0313R	19 02 030 308	335
P0315	19 02 030 500	339
P0315R	19 02 030 508	335
P0317	19 02 030 700	339
P0317R	19 02 030 701	335
P0320	19 23 030 000	361
P0321	19 22 030 150	354
P0321R	19 22 030 153	351
P0322	19 22 030 200	354
P0323R	19 22 030 308	351
P0325R	19 22 030 508	351
P0400N	19 03 040 002	348
P0410	19 02 041 000	340
P0410R	19 02 041 002	336
P0411	19 02 040 150	335
P04119U	19 02 040 190	335
P0412	19 02 040 200	335
P0413	19 02 040 300	339
P0413R	19 02 040 303	336
P0415	19 02 040 500	340
P0415R	19 02 040 505	336
P0417	19 02 040 700	340
P0417R	19 02 040 701	336
P0421	19 22 040 150	354
P04219GU	19 22 040 191	355
P0421R	19 22 040 152	351
P0422	19 22 040 400	355
P0423R	19 22 040 302	352
P0425R	19 22 040 502	352
P0500N	19 03 050 001	348
P0500T	19 03 050 002	348
P0510	19 02 051 000	340
P0510R	19 02 051 008	336
P0511	19 02 050 150	336
P0512	19 02 050 200	336
P0513	19 02 050 300	340
P0513R	19 02 050 308	336
P0515	19 02 050 500	340
P0515R	19 02 050 508	336
P0517	19 02 050 700	340
P0517R	19 02 050 701	336
P0520	19 23 050 000	361
P0521	19 22 050 150	354
P0521R	19 22 050 153	352
P0522	19 22 050 201	355
P0523R	19 22 050 308	352
P0525R	19 22 050 508	352
P0600N	19 03 060 001	348
P0601	19 01 021 001	342
P0602	19 01 021 500	342
P0603	19 01 022 001	342
P0604	19 01 022 500	342
P0612	19 02 060 200	337
P0613	19 02 060 300	340
P0613R	19 02 060 301	337
P0615	19 02 060 500	340
P0615R	19 02 060 501	337
P0621	19 22 060 151	355
P0622	19 22 060 200	354
P0623R	19 22 060 302	353
P0625R	19 22 060 502	353
P0701	19 21 021 000	358
P0702	19 21 021 502	358
P0703	19 21 022 000	358
P0704	19 21 022 502	358
P08215	19 28 441 500	379
P08225	19 28 242 500	380
P082251	19 28 842 500	380
P08250	19 28 245 000	380
P08420	19 08 242 000	372
P084251	19 08 242 503	372
P084253	19 08 542 500	373
P084254	19 08 442 500	373
P084255	19 08 242 514	372
P084256	19 08 842 500	374
P08440	19 08 544 000	373
P084501	19 08 245 003	372
P084503	19 08 545 000	374
P084504	19 08 445 000	373
P084505	19 08 245 012	373
P08520W	19 08 732 000	371
P08525W	19 08 742 500	371
P08550W	19 08 745 000	371
P08620W	19 28 732 000	378
P08625W	19 28 742 500	378
P08650W	19 28 745 000	378
P09220	19 28 142 000	382
P09225	19 28 042 500	382
P092251	19 28 042 504	381
P09225M	19 28 042 501	381
P09240	19 28 044 000	382
P09240M	19 28 044 001	382
P09250	19 28 045 000	382
P092501	19 28 045 003	381
P12114	19 02 120 140	337
P1212	19 02 120 201	330
P1213	19 02 120 300	337
P1300N	19 03 130 001	349
P1300T	19 03 130 002	349
P1310	19 02 131 000	341
P1310R	19 02 131 008	331
P1311	19 02 130 121	330
P13115	19 02 130 155	330
P1311PD	19 02 330 153	334
P1312	19 02 130 200	330
P1312CU	19 02 130 206	330
P1312FC	19 02 130 207	330
P1312Z	19 02 130 203	333
P1313	19 02 130 300	340
P1313R	19 02 130 308	330
P1313RZ	19 02 830 300	333
P1315	19 02 130 500	341
P1315R	19 02 130 508	330
P1317	19 02 130 700	341
P1317R	19 02 130 701	331
P1320	19 23 130 000	361
P1321	19 22 130 150	354
P1321PD	19 02 330 154	355
P1321R	19 22 130 156	351
P1322	19 22 130 200	354
P1322CU	19 22 130 203	356
P1322FC	19 22 130 204	356
P1322PD	19 22 130 202	356
P1323R	19 22 130 308	351
P1325R	19 22 130 508	351
P1400N	19 03 140 001	349
P1410	19 02 141 000	339
P14101	19 02 341 000	329
P1410R	19 02 141 001	331
P1412	19 02 140 200	331
P1412SM	19 02 940 203	341
P1413	19 02 140 300	341
P14131	19 02 340 301	329
P1413R	19 02 140 301	331
P1415	19 02 140 500	341
P14151	19 02 340 501	329
P1415R	19 02 140 502	331
P1417	19 02 140 700	341
P1417R	19 02 140 701	331
P14201	19 22 341 000	350
P1421	19 22 140 153	356
P1421R	19 22 140 152	351
P1422	19 22 140 200	354
P1422SM	19 22 940 201	357
P14231	19 22 140 302	350
P1423R	19 22 140 303	352
P14251	19 22 340 501	350
P1425R	19 22 140 503	352
P1500N	19 03 150 001	349
P1500T	19 03 150 002	349
P1510	19 02 151 000	339
P1510R	19 02 151 008	332
P1512	19 02 150 200	331
P1513	19 02 150 300	339
P1513CU	19 02 150 305	331
P1513FC	19 02 150 309	332
P1513R	19 02 150 308	331
P1515	19 02 150 500	339
P1515R	19 02 150 508	332
P1517	19 02 150 700	338
P1517R	19 02 150 701	332
P1520	19 23 150 000	361
P1521	19 22 150 155	356
P1521R	19 22 150 154	352
P1522	19 22 150 200	354

Order Code	Item Number	page
P1523CU	19 22 150 306	356
P1523FC	19 22 150 309	356
P1523R	19 22 150 308	352
P1525R	19 22 150 508	352
P1600N	19 03 160 001	349
P1612	19 02 160 200	332
P1613	19 02 160 300	338
P1613R	19 02 160 303	332
P1615	19 02 160 500	338
P1615R	19 02 160 502	332
P1621	19 22 160 153	356
P1621R	19 22 160 152	353
P1622	19 22 160 200	355
P1623R	19 22 160 302	353
P1625R	19 22 160 502	353
P19125	19 08 012 501	374
P19150	19 08 015 001	374
P19221	19 28 545 011	380
P19222	19 28 242 502	379
P19223	19 28 245 003	379
P19224	19 28 544 000	379
P192250	19 28 432 500	377
P193250	19 08 432 500	370
P19410N	19 08 141 001	376
P194151	19 08 141 500	376
P19420	19 08 142 001	376
P19425	19 08 042 501	375
P194252	19 08 142 500	376
P194253	19 08 042 512	375
P19425P	19 08 042 510	375
P19427	19 28 042 507	381
P19430	19 08 143 001	377
P19450	19 08 045 001	375
P194504	19 08 045 020	376
P19450P	19 08 045 010	375
P19510	19 28 141 000	383
P19515	19 28 141 500	383
P19625	19 28 542 500	380
P19733	19 28 733 300	377
P2311	14 50 000 370	91
P2313	14 50 000 400	91
P2314	14 50 000 460	91
P2315	14 50 000 480	92
P2316	14 50 000 510	92
P2317	14 50 000 490	92
P3111	14 40 813 170	80
P3113	14 40 012 111	80
P3114	14 40 013 125	79
P3115	14 40 014 100	79
P3116	14 40 011 500	79
P3118	14 50 000 450	79
P3120	14 50 000 520	79
P3121	14 50 000 530	78
P3122	14 50 000 540	78
P3150	14 40 011 100	78
P3160	14 40 011 203	78
P3170	14 40 013 123	77
P3180	14 50 000 330	77
P3190	14 50 000 340	77
P3210	14 40 004 904	81
P3214	14 40 004 908	82
P3215	14 50 000 500	83
P3216	14 50 000 560	83
P3306	14 56 000 060	95
P3310K	14 40 883 200	94
P3314	14 56 000 110	95
P3315	14 56 000 120	96
P3316	14 56 000 130	96
P3318	14 56 000 150	96
P3319	14 56 000 160	96
P3320	14 56 000 170	96
P3323	14 56 000 200	97
P3324	14 40 013 130	94
P3325	14 60 000 000	94
P3326	14 56 000 210	97
P3327	14 40 043 100	95
P3328	14 60 000 010	95
P3400	14 40 211 100	82
P3521	14 41 162 100	84
P3528	14 41 203 100	84
P3531	14 41 233 110	83
P3534	14 41 250 920	84
P3536	14 41 263 110	84
P3537	14 41 273 110	85
P3538	14 41 283 110	97
P3539	14 41 341 100	84
P3540	14 41 212 901	85
P3541	14 41 292 150	83
P3542	14 41 317 000	85
P3543	14 41 351 500	85
P3544	14 41 361 900	85
P3545	14 41 371 900	86
P3546	14 41 381 900	86
P3848A	14 40 093 109	98
P3861	14 40 032 202	81
P3862	14 40 032 400	82
P3887	14 40 812 900	99
P3888	14 40 813 100	90
P3894	14 40 813 110	80
P3897	14 40 813 130	98
P3920	14 46 002 000	93
P3921	14 46 002 100	93
P3922	14 46 002 200	93
P3923	14 46 002 300	92
P4006	14 47 003 100	82
P4010	14 40 041 500	82
P4104	14 48 000 040	102
P4112	14 40 833 200	89
P4113	14 40 814 200	89
P4203	14 49 000 030	90
P4205	14 49 000 050	90
P4531	14 50 000 280	88
P4533	14 50 000 300	87
P4534	14 50 000 310	87
P4535	14 40 004 901	88
P4536	14 50 000 320	87
P4537	14 50 000 350	88
P4538	14 50 000 360	88
P4540	14 50 000 291	87
P4542	14 50 000 420	86
P4543	14 50 000 430	87
P4544	14 50 000 440	88
P4545	14 50 000 550	89
P4546	14 50 000 580	89
P4702	14 40 013 114	81
P4703	14 40 013 115	98
P4704	14 40 813 150	80
P4705	14 40 813 160	98
P4706	14 40 013 116	98
P4711	14 39 013 900	101
P4713	14 40 812 903	100
P4714	14 50 000 410	100
P4715	14 40 113 100	100
P4716	14 40 013 129	100
P4717	14 40 833 300	99
P4718	14 40 813 102	99
P4719	14 50 000 470	99
P4720	14 50 000 413	99
P4721	14 39 013 902	102
P4722	14 40 033 104	100
P4723	14 39 013 903	102
P4724	14 50 000 570	101
P4725	14 50 000 590	101
P4726	14 40 013 901	101
P53871	19 09 050 153	363
P53872	19 09 050 154	363
P53873	19 09 050 301	363
P53874	19 09 050 302	364
P53876	19 09 050 503	364
P53893	19 09 010 000	362
P53898	19 09 080 152	365
P53899	19 09 080 153	365
P54012	19 09 040 200	363
P54013	19 09 030 150	362
P54014	19 09 030 151	362
P54015	19 09 060 151	364
P54016	19 09 060 301	364
P54017	19 09 060 500	365
P54018	19 09 060 152	364
P54019	19 09 060 302	365
P54022	19 09 040 201	363
P54052	19 09 480 300	365
P54212	19 09 040 202	368
P54213	19 09 030 152	367
P54214	19 09 030 153	367
P54215	19 09 060 153	367
P54216	19 09 060 303	367
P54217	19 09 060 501	367
P54218	19 09 060 154	366
P54219	19 09 060 304	366
P54222	19 09 040 203	366
P54252	19 09 480 301	366
P5501	19 07 110 010	394
P5502	19 07 010 010	393
P5503	19 07 010 020	393
P5504	19 07 010 030	393
P5506	19 07 110 020	394
P5507N	19 07 110 040	394
P5508N	19 07 010 054	392
P5521N	19 27 110 012	391
P5522	19 27 010 010	392
P5523N	19 27 010 023	393
P5525N	19 27 110 034	393
P5526N	19 27 110 033	391
P5531	19 36 055 310	385
P5532	19 36 055 320	384
P5533	19 36 553 300	384
P5534	19 36 553 400	384
P5551	19 16 055 510	385
P5552	19 16 055 520	385
P5553	19 16 555 300	385
P5554	19 16 555 400	385
P5603R	21 01 106 001	484
P5604	21 01 106 000	483
P5606OT	21 01 208 000	483
P5607	21 01 209 000	483
P5608	21 01 111 000	483
P5611OT	21 01 309 000	482
P5611OTR	21 01 308 000	485
P5614	21 01 106 010	482
P5616OT	21 01 307 000	482
P5618	21 01 112 000	482
P56201	21 01 900 000	480
P56201BUF	21 01 900 012	480
P56201UF	21 01 900 002	480
P56211	21 01 900 001	480
P56300	21 04 102 000	488
P5631S	21 01 900 017	481
P56400S	21 04 105 000	486
P56402	21 01 501 020	488
P56402PL	21 01 501 021	488
P56450	21 01 505 003	487
P56500	21 01 505 000	487
P56500S	21 04 103 000	486
P56501	21 04 101 000	487
P56502	21 01 505 006	487
P56503X	21 04 107 000	488
P56601FR	21 06 000 300	481
P56601SH	21 06 000 400	481
P5660FR	21 06 000 100	485
P5660SH	21 06 000 200	485
P5681	21 01 103 000	484
P5682	21 01 104 000	484
P5683	21 01 107 000	484
P5684	21 01 108 000	484
P5685	21 01 109 000	485
P5686	21 01 110 000	485
P56A01	21 01 211 000	482
P56A02	21 01 214 000	483
P56A11	21 01 311 000	481
P56EXT1	21 07 956 100	489
P56PR1	21 07 561 000	489
P56PR2	21 07 562 000	489
P56PR3	21 07 563 000	489
P56S01	21 01 213 000	479
P56S01F	21 01 212 000	480
P56S11	21 01 310 000	479
P57000T	34 01 570 001	468
P57000TR	34 01 570 000	469
P57001	34 01 000 010	469
P57002	34 01 000 020	469
P57101	34 01 571 010	468
P57102	34 01 571 020	468
P57103	34 02 129 000	465
P57103	34 02 129 000	469
P57104	34 01 571 040	469
P5723	34 02 107 000	465
P5723T	34 02 108 000	467
P5727N	34 02 132 000	464
P5728	34 02 043 000	464
P5728T	34 02 113 000	467
P5729	34 02 044 000	464
P5729B	34 02 121 000	464
P5729T	34 02 114 000	467
P5730	34 02 115 000	464
P5731	34 02 116 000	463
P5732T	34 02 117 001	467
P5733G	34 02 124 000	463
P5733S	34 02 123 000	463
P5733W	34 02 122 000	463
P5734	34 02 125 000	463
P5734B	34 02 126 000	462
P5734T	34 02 126 001	467
P5735SS	34 02 128 000	460
P5735WS	34 02 127 000	460
P5736	34 02 130 000	462
P5737	34 02 131 000	462
P5739B	34 02 135 000	465
P5739T	34 02 138 000	468
P5739W	34 02 134 000	465
P5750	34 02 118 000	461
P5750.2R	34 02 120 000	461
P5750.2T	34 02 119 000	461
P5750T	34 02 118 001	466
P5760N	34 02 060 011	461
P5760T	34 02 060 002	466
P5763N	34 02 060 012	462
P5763RN	34 02 063 002	462
P57P01	34 02 136 000	466
P57P02	34 02 137 000	466
P57U01	34 02 133 000	465
P5805	19 11 000 050	395
P5822	19 31 000 020	394
P8105	14 51 710 500	73
P8107	14 51 710 700	73
P8502	14 51 701 200	72
P8504	14 51 703 300	72
P8506	14 51 703 200	71
P8507	14 51 703 110	72
P8508	14 51 703 402	72
P8511	14 51 704 100	71
P8512	14 51 704 201	72
P8555	14 51 703 500	75
P8567	14 51 085 670	74
P8569	14 51 701 900	74
P8571	14 51 704 600	75
P8572	14 51 704 101	75
P8573	14 51 705 300	76
P8574	14 51 705 400	76
P8582	14 51 704 200	75
P8583	14 51 704 300	76
P8584	14 51 704 400	76
PC0111	19 01 210 150	345
PC0113R	19 01 210 301	345
PC0115R	19 01 210 500	345
PC0121R	19 21 210 150	360
PC0123R	19 21 210 300	360
PC0125R	19 21 210 501	360
PC01301	19 02 210 150	347
PC01303	19 02 210 300	347
PC01305	19 02 210 500	347
PC0311	19 02 230 160	332
PC0312	19 02 230 200	332
PC0313	19 02 230 300	338
PC0313R	19 02 230 301	332
PC0315	19 02 230 500	338
PC0315R	19 02 230 501	333
PC0413	19 02 240 300	338
PC0413R	19 02 240 301	333
PC0415	19 02 240 500	338
PC0415R	19 02 240 501	333
PC0512	19 02 250 200	333
PC0513	19 02 250 300	338
PC0513R	19 02 250 301	333
PC1311	19 02 330 150	333
PC1312	19 02 330 200	333
PC1313	19 02 330 300	338
PC1313R	19 02 330 301	333
PC1315	19 02 330 500	338
PC1315R	19 02 330 501	334
PC1321	19 22 330 150	355
PC1321R	19 22 330 152	353
PC1413	19 02 340 300	337
PC1413R	19 02 340 302	334
PC1415	19 02 340 500	337
PC1415R	19 02 340 502	334
PC1421R	19 22 340 151	353
PC1423R	19 22 340 301	353
PC1425R	19 22 340 502	353
PC1512	19 02 350 200	334
PC1513	19 02 350 300	337
PC1513R	19 02 350 301	334
PC1521R	19 22 350 151	353
PC1621R	19 22 360 150	354
PM0501	19 14 031 100	368
PM0502	19 14 031 150	368
PM0503	19 14 031 200	368
PM0504	19 14 031 250	368
PM0505	19 14 031 300	369
PM0902	19 14 071 100	369
PM0904	19 14 071 200	369
PM0905	19 14 071 250	369
PM1011	19 14 090 072	369
PM1102	19 14 081 102	369
PM1103	19 14 081 103	369
PM1104	19 14 081 104	369
PM1105	19 14 081 105	370
PS1721	19 22 570 150	355
PW56001	21 05 560 010	491
PW56201	21 05 562 010	490
PW56202	21 05 562 020	490
R5060	18 04 300 100	413
R5060.2	18 04 300 200	415
R5553	18 07 200 300	414
R5602	18 07 300 100	413
R5602.2	18 07 300 300	416
R5610	18 07 300 200	413
R5610.2	18 07 300 301	416
R5639	18 07 200 100	414
R5639.2	18 07 201 000	415
R5850	18 07 200 500	414
R5850.2	18 07 100 803	415
R5851	18 07 200 600	414
R5852	18 07 200 700	414
R5852.2	18 07 100 804	415
S00003	24 35 724 032	399
S03030	24 21 130 212	397
S03030N	24 21 130 213	397
S03031N	24 21 130 214	397
S03050	24 21 150 212	397
S03050N	24 21 150 213	398
S03130	24 25 130 220	398
S03130N	24 25 130 210	399
S03150	24 25 150 220	398
S03150N	24 25 150 210	399
S03210N	24 25 210 210	399
S03230	24 25 230 220	398
S03230N	24 25 230 210	399
S03250	24 25 250 220	398
S03250N	24 25 250 210	399
S03330	24 21 230 230	397
S03350	24 21 250 230	397
S03430	24 25 430 230	398
S03450	24 25 450 230	398
S08272	24 02 720 132	401
S08273	24 02 730 132	401
S09272	24 02 720 232	401
S09273	24 02 730 232	401
S10000	23 33 101 070	430
S10100	23 33 101 011	430
S10101	23 33 101 016	430
S10102	23 33 101 013	429
S10103	23 33 101 014	429
S10110	23 33 101 015	429
S10300	23 33 101 031	429
S10310	23 33 101 032	429
S10500	23 33 101 051	429
S10510	23 33 101 052	429
S11000	23 33 101 100	429
S1111	24 00 517 252	401
S12252	24 01 520 132	400
S14312	24 13 120 132	402
S14313	24 13 130 132	402
S14315	24 13 150 132	402
S14322	24 13 220 132	402
S14323	24 13 230 132	402
S14325	24 13 250 132	402
S14372	24 13 720 132	401
S14373	24 13 730 132	401
S14375	24 13 750 132	402
S15272	24 01 720 132	400
S15273	24 01 730 132	400
S15275	24 01 750 132	400
S18312	24 13 120 232	402
S18313	24 13 130 232	403
S18315	24 13 150 232	403
S18322	24 13 220 232	403
S18323	24 13 230 232	403
S18325	24 13 250 232	403
S18372	24 13 720 232	402
S18373	24 13 730 232	402
S19272	24 01 720 232	400
S19273	24 01 730 232	400
S19275	24 01 750 232	401
S30100	23 33 130 120	429
S30110	23 33 130 121	429
S30200	23 33 130 250	428
S30210	23 33 130 251	428
S30300	23 33 130 350	428
S30310	23 33 130 351	428
S30500	23 33 130 051	428
S30510	23 33 130 052	428
S30700	23 33 130 750	428
S30710	23 33 130 751	428
S31000	23 33 130 101	428
S31010	23 33 130 102	428
S31500	23 33 130 151	427
S31510	23 33 130 152	427
S4001R	23 04 000 400	474
S4003N	23 04 000 500	474
S5141	23 05 100 200	422
S5194	23 05 059 009	424
S5213	23 05 058 401	420
S5231S	23 05 050 201	423
S5241S	23 05 100 201	422
S5252	23 05 500 000	422
S5253	23 05 500 002	423
S5261	23 05 113 000	421
S5262	23 05 113 002	421
S5265	23 05 113 500	422
S5266	23 05 113 502	422
S5268	23 05 113 003	421
S5269	23 05 113 600	421
S5271	23 05 021 000	423
S5272	23 05 023 000	424
S5273	23 05 021 100	423
S5373	23 05 120 010	425
S5374	23 05 120 020	425
S5375	23 05 120 030	425
S5376	23 05 120 040	425
S5378	23 05 032 010	425
S5381E	23 05 130 010	424
S5382	23 05 135 000	424
S5383	23 05 135 010	424
S5385	23 05 120 005	423
S70200	23 33 170 021	427
S70201	23 33 170 022	427
S70202	23 33 170 023	427
S70203	23 33 170 010	427
S8130	23 08 201 550	418
S8230	23 08 203 550	418
S8231	23 08 203 510	417
S8250	23 08 205 050	418
S8251	23 08 205 010	417
S8253	23 08 305 050	419
S8270	23 08 207 550	419
S8271	23 08 207 510	417
S8273	23 08 307 550	419
S8280	23 08 210 050	419
S8281	23 08 210 010	418
S8283	23 08 310 050	420
S8290	23 08 215 050	419
S8291	23 08 215 010	418
S8293	23 08 315 050	420
S8307	23 08 207 500	416
S8310	23 08 210 000	416
S8314	23 08 215 000	416
S8324	23 08 225 000	417
S8405	23 08 325 000	417
S9121	23 09 010 010	406
S9122	23 09 010 020	409
S9123	23 09 010 030	409
S9124	23 09 010 040	409
S9125	23 09 010 050	409
S9126	23 09 010 060	410
S9127	23 09 010 070	410
S9130	23 09 010 100	410
S9131	23 09 020 010	408
S9132	23 09 020 020	408
S9135	23 09 010 130	406
S9136	23 09 010 140	405
S9137	23 09 010 150	405
S9141	23 09 210 010	406
S9142	23 09 210 020	406
S9143	23 09 210 030	406
S9221	23 09 110 010	407

Order Code	Item Number	page
S9222	23 09 110 020	407
S9223	23 09 110 030	407
S9224	23 09 110 040	407
S9225	23 09 110 050	407
S9231	23 09 010 160	408
SB3115	23 33 131 150	426
SL0101	23 33 001 010	427
SL0301	23 33 003 010	426
SL2001	23 33 020 010	426
SM5003	23 35 050 030	433
SM5105	23 35 050 050	433
SM7004B	23 35 070 420	433
SM7008BL	23 35 076 021	432
SM7009BL	23 35 076 020	432
SM7013W	23 35 071 310	432
SM7015W	23 35 076 014	432
SM7021BL	23 35 072 100	432
SM7022BL	23 35 072 200	431
SM7025BL	23 35 072 501	431
SM7025W	23 35 072 500	431
SM7026	23 35 076 011	431
SM7027W	23 35 076 013	431
SM7028BL	23 35 072 210	430
SM7029BL	23 35 072 220	430
V01B10	17 04 022 600	66
V01G20	17 04 023 000	65
V02B15	17 04 022 700	67
V02C48	17 04 023 400	67
V02G20	17 04 022 900	65
V03G35	17 04 022 800	66
V04G45	17 04 023 100	66
V05G65	17 04 023 200	66
V06G120	17 04 023 300	66
V1TG65	17 04 023 500	67
Z50B11	15 25 813 201	156
Z52032	15 25 743 226	154
Z52311	15 25 813 208	155
Z53012	15 25 743 228	153
Z55032	15 25 743 227	154
Z55311	15 25 813 206	154
Z57032	15 25 743 224	153
Z57311	15 25 813 207	154
Z58032	15 25 743 225	154
Z58311	15 25 813 209	155
Z59D01	15 25 813 200	155
Z59G01	15 25 813 205	155
Z5AI01	15 25 813 202	155
Z5CS11	15 25 813 204	156
Z6915	15 24 115 012	157
Z6923	15 24 014 023	156
Z73115	15 35 247 000	163
Z73116	15 35 248 000	163
Z73125	15 35 249 000	163
Z73126	15 35 250 000	163
Z73135	15 35 251 000	164
Z73136	15 35 252 000	164
Z73215	15 35 235 000	161
Z73216	15 35 236 000	160
Z73217	15 35 253 000	160
Z73218	15 35 254 000	160
Z73225	15 35 237 000	161
Z73226	15 35 238 000	161
Z73227	15 35 255 000	161
Z73228	15 35 256 000	161
Z73235	15 35 239 000	162
Z73236	15 35 240 000	162
Z73237	15 35 257 000	162
Z73238	15 35 258 000	162
Z7599B	15 38 150 200	281
Z7599W	15 38 150 201	281
Z7602B	15 38 155 000	281
Z7602BL	15 38 157 000	281
Z7602P	15 38 156 000	281
Z7602W	15 38 154 000	280
Z7615	15 38 176 000	284
Z7617	15 38 179 000	285
Z7619B	15 38 182 000	280
Z7619W	15 38 183 000	280
Z7626	15 38 190 000	282
Z7627	15 38 191 000	282
Z7630B	15 38 197 000	283
Z7630W	15 38 196 000	282
Z7631	15 38 198 000	283
Z7633	15 38 199 000	283
Z7634	15 38 200 000	283
Z7635B	15 38 200 100	284
Z7635W	15 38 200 200	283
Z7636B	15 38 200 400	284
Z7636W	15 38 200 300	284
Z7637B	15 38 200 500	285
Z7637W	15 38 200 600	284
Z7638B	15 38 200 700	282
Z7638W	15 38 200 800	282
Z7639	15 38 200 900	285
Z7640GR	15 38 201 200	278
Z7640P	15 38 201 100	278
Z7640W	15 38 201 000	277
Z7641B	15 38 201 300	279
Z7641W	15 38 201 400	278
Z7642B	15 38 201 500	278
Z7642GL	15 38 201 600	278
Z7643B	15 38 202 300	279
Z7643W	15 38 202 200	279
Z7644BL	15 38 201 900	280
Z7644G	15 38 202 000	280
Z7644P	15 38 201 800	279
Z7644W	15 38 201 700	279
Z7645	15 38 202 100	285
Z7901	15 38 900 010	286
Z7902	15 38 900 020	286
Z7903	15 38 900 030	286
Z7904	15 38 900 040	286
Z7905	15 38 900 050	287
ZAB101	15 46 101 000	297
ZAB102	15 46 102 001	297
ZAB103	15 46 103 000	298
ZAB901	15 46 901 000	298
ZAB902	15 46 902 000	298
ZAB903	15 46 903 000	299
ZAB911	15 46 911 000	299
ZAB912	15 46 912 000	299
ZAB913	15 46 913 000	299
ZAL192	15 43 191 000	202
ZAL382	15 43 381 000	202
ZALAP	15 43 999 000	202
ZALAR	15 43 999 001	202
ZALAS	15 43 999 002	202
ZALL	15 43 081 000	201
ZALT	15 43 121 000	201
ZALX	15 43 151 000	201
ZB1114	15 44 103 320	203
ZB1124	15 44 103 321	204
ZB1214	15 44 103 628	207
ZB1223	15 44 103 610	207
ZB1224	15 44 103 629	207
ZB1524	15 44 103 322	205
ZB1614	15 44 103 643	209
ZB1624	15 44 103 644	210
ZB2110	15 44 102 220	206
ZB2120	15 44 102 221	206
ZB2154	15 44 103 027	205
ZB2210	15 44 103 656	208
ZB2214	15 44 103 622	208
ZB221H	15 44 104 052	209
ZB2220	15 44 103 657	209
ZB2224	15 44 103 623	208
ZB222H	15 44 104 053	209
ZB2410	15 44 103 645	211
ZB2420	15 44 103 655	211
ZB3114	15 44 203 320	204
ZB3124	15 44 203 321	204
ZB3214	15 44 103 630	208
ZB3524	15 44 203 322	205
ZB3614	15 44 203 620	210
ZB3624	15 44 203 621	210
ZB4110	15 44 202 220	206
ZB4120	15 44 202 221	206
ZC0108	15 45 000 080	271
ZC0109	15 45 000 090	271
ZC0110	15 45 000 100	271
ZC0111	15 45 000 110	272
ZCA0123	15 45 000 200	272
ZCA0126	15 45 000 220	273
ZCA0313	15 45 000 180	272
ZCA0316	15 45 000 190	272
ZCA0323	15 45 000 210	273
ZCA0326	15 45 000 230	273
ZCD0123	15 45 000 240	273
ZCD0323	15 45 000 250	273
ZCW11BR	15 55 110 000	297
ZCW11WR	15 55 111 000	296
ZCW34BR	15 55 034 000	277
ZD1124	15 40 110 613	244
ZD1125	15 40 110 623	244
ZD1134	15 40 111 214	245
ZD1135	15 40 111 224	244
ZD1144	15 40 111 813	245
ZD1145	15 40 111 823	245
ZD1154	15 40 112 413	245
ZD1155	15 40 112 423	245
ZD1323	15 40 140 670	243
ZD1333	15 40 141 270	244
ZD1343	15 40 141 870	244
ZD1432	15 39 085 090	250
ZD1442	15 39 085 180	250
ZD1452	15 39 085 244	250
ZD2124	15 40 210 612	242
ZD2125	15 40 210 622	242
ZD2134	15 40 211 213	242
ZD2135	15 40 211 223	242
ZD2144	15 40 211 813	243
ZD2145	15 40 211 823	243
ZD2154	15 40 212 413	243
ZD2155	15 40 212 424	243
ZD2323	15 40 240 670	241
ZD2333	15 40 241 270	241
ZD2343	15 40 241 870	242
ZD2442	15 39 085 181	251
ZD2452	15 39 085 241	251
ZD3121	15 40 115 510	240
ZD3122	15 40 115 570	240
ZD3221	15 40 125 510	240
ZD3222	15 40 125 570	241
ZE0101	15 27 000 800	158
ZE0102	15 27 001 200	158
ZE0203	15 27 101 400	158
ZE0304	15 28 020 000	159
ZE0305	15 28 021 000	159
ZE0306	15 28 022 000	159
ZE0505A	15 28 001 402	158
ZF1A42	15 25 741 259	107
ZF1A43	15 25 731 454	108
ZF1D02	15 25 731 251	111
ZF1D03	15 25 731 448	112
ZF1D22	15 25 731 252	112
ZF1D23	15 25 731 449	112
ZF1D42	15 25 731 253	113
ZF1D43	15 25 731 450	113
ZF1D52	15 25 731 259	114
ZF1D53	15 25 731 456	114
ZF2D52	15 25 743 212	117
ZF2D53	15 25 743 405	117
ZF2D62	15 25 743 213	116
ZF2D63	15 25 743 406	116
ZF2D82	15 25 743 214	116
ZF2D83	15 25 743 407	116
ZF3A42	15 25 741 258	108
ZF3A43	15 25 731 453	108
ZF3D02	15 25 731 248	114
ZF3D03	15 25 731 445	114
ZF3D22	15 25 731 249	115
ZF3D23	15 25 731 446	115
ZF3D42	15 25 731 250	115
ZF3D43	15 25 731 447	115
ZF3D52	15 25 731 258	115
ZF3D53	15 25 731 455	116
ZF5147	15 25 283 273	105
ZF5147.3	15 25 283 274	106
ZF5148	15 25 283 410	106
ZF5148.3	15 25 283 411	106
ZF5157	15 25 283 275	106
ZF5157.3	15 25 283 276	106
ZF5158	15 25 283 412	107
ZF5158.3	15 25 283 413	107
ZF5167	15 25 283 279	107
ZF5168	15 25 283 417	107
ZF5751	15 25 743 409	117
ZF5754	15 25 737 401	117
ZF5D22	15 25 743 203	108
ZF5D23	15 25 733 497	108
ZF5D42	15 25 743 204	109
ZF5D42.3	15 25 743 237	109
ZF5D43	15 25 733 498	109
ZF5D43.3	15 25 743 416	109
ZF5D52	15 25 743 205	109
ZF5D52D	15 25 743 238	110
ZF5D53	15 25 733 499	110
ZF5D54D	15 25 743 417	110
ZF5D62	15 25 743 206	110
ZF5D62D	15 25 743 239	111
ZF5D63	15 25 743 400	110
ZF5D64D	15 25 743 418	111
ZF5D82	15 25 743 208	111
ZF5D83	15 25 743 401	111
ZF6D02	15 25 743 209	112
ZF6D03	15 25 743 402	112
ZF6D22	15 25 743 210	113
ZF6D23	15 25 743 403	113
ZF6D42	15 25 743 211	113
ZF6D43	15 25 743 404	114
ZG112S	15 52 112 000	259
ZG121S	15 52 121 000	258
ZG122S	15 52 122 000	258
ZG131S	15 52 131 000	259
ZG132S	15 52 132 000	259
ZG151S	15 53 151 000	260
ZG161S	15 53 161 000	257
ZG162S	15 53 162 000	257
ZG165S	15 53 165 000	258
ZG166S	15 53 166 000	258
ZG172S	15 53 172 000	270
ZGA010P	15 54 000 001	261
ZGA020P	15 54 000 002	261
ZGA040P	15 54 000 003	261
ZGA0A0P	15 54 002 000	261
ZGA0C0P	15 54 002 001	262
ZGB010P	15 54 000 004	262
ZGB020P	15 54 000 005	262
ZGB040P	15 54 000 006	262
ZGC010P	15 54 000 007	263
ZGC040P	15 54 000 008	263
ZGC0A0P	15 54 002 002	263
ZGD010P	15 54 000 000	260
ZGD070P	15 54 001 000	260
ZGE014L	15 54 112 000	264
ZGE044L	15 54 112 001	264
ZGE0A4L	15 54 112 200	264
ZGE0C4L	15 54 112 201	264
ZGF010P	15 54 020 000	265
ZGF020P	15 54 020 001	265
ZGG010P	15 54 000 009	265
ZGH010P	15 54 000 010	266
ZGH040P	15 54 000 011	266
ZGI010P	15 54 000 012	266
ZGJ044S	15 54 202 000	267
ZGJ0B4S	15 54 202 200	267
ZGJ0F4S	15 54 202 201	267
ZGK044S	15 54 204 000	268
ZGK0B4S	15 54 204 200	268
ZGL010P	15 54 000 013	268
ZGL020P	15 54 000 014	269
ZGL0A0P	15 54 002 003	269
ZGL0C0P	15 54 002 004	269
ZIW154R	15 55 154 000	296
ZIW15CR	15 55 015 000	296
ZIW17FR	15 55 017 000	296
ZIW181R	15 54 181 000	256
ZIW184R	15 54 184 000	256
ZIW191R	15 54 191 000	256
ZIW194R	14 54 194 000	257
ZIW223R	15 55 223 000	296
ZIW22AR	15 55 022 000	295
ZIW249R	15 55 249 000	295
ZIW269R	15 55 269 000	295
ZIW426R	15 55 426 000	295
ZL1F22	15 25 731 246	149
ZL1F23	15 25 741 451	150
ZL1F47	15 25 731 262	150
ZL1F48	15 25 731 458	150
ZL3F22	15 25 731 244	151
ZL3F23	15 25 731 452	151
ZL3F47	15 25 731 261	151
ZL3F48	15 25 731 457	151
ZL4F22	15 25 743 201	151
ZL5F47	15 25 743 241	147
ZL5F47.3	15 25 743 244	148
ZL5F47.6	15 25 743 245	148
ZL5F48	15 25 743 419	148
ZL5F48.3	15 25 743 422	148
ZL5F48.6	15 25 743 423	148
ZL5F57	15 25 743 242	149
ZL5F58	15 25 743 420	149
ZL5F67	15 25 743 243	149
ZL5F68	15 25 743 421	149
ZL6F22	15 25 743 202	150
ZL6F23	15 25 731 451	150
ZL8F02	15 25 730 234	152
ZL8F03	15 25 730 429	152
ZL8F22	15 25 730 235	152
ZL8F23	15 25 730 430	152
ZL8F52	15 25 730 236	152
ZL8F53	15 25 730 433	153
ZL8F54	15 25 730 117	153
ZM1120	15 39 085 123	236
ZM1121	15 39 085 184	236
ZM1122	15 39 085 245	237
ZM1400	15 39 085 186	237
ZM1401	15 39 085 220	237
ZM1402	15 39 085 187	237
ZM1403	15 39 085 221	238
ZM1404	15 39 085 188	238
ZM1405	15 39 085 222	238
ZM1406	15 39 085 189	238
ZM1407	15 39 085 223	238
ZM3010	15 39 722 000	233
ZM3012	15 39 402 000	227
ZM3013	15 39 402 010	228
ZM3014	15 39 402 020	228
ZM3020	15 39 722 010	233
ZM3130	15 39 071 140	232
ZM3131	15 39 071 240	232
ZM3230	15 39 072 141	232
ZM3231	15 39 072 240	233
ZM3405	15 39 085 050	224
ZM3406	15 39 085 080	225
ZM3406M	15 39 085 900	225
ZM3407	15 39 085 110	225
ZM3408	15 39 085 122	225
ZM3408M	15 39 085 130	226
ZM3409	15 39 085 190	225
ZM3415	15 39 084 050	224
ZM3416	15 39 084 080	224
ZM3418	15 39 084 120	224
ZM4121	15 39 081 150	228
ZM4122	15 39 081 240	229
ZM4311	15 39 043 050	230
ZM4312	15 39 043 060	231
ZM4313	15 39 043 070	231
ZM4314	15 39 043 080	231
ZM4315	15 39 402 420	231
ZM4316	15 39 102 420	231
ZM4317	15 39 402 421	232
ZM4321	15 39 082 150	229
ZM4322	15 39 082 240	229
ZM4323	15 39 082 151	229
ZM4324	15 39 082 241	230
ZM4325	15 39 085 360	229
ZM4328	15 39 085 150	230
ZM4329	15 39 085 240	230
ZM4400	15 39 087 170	234
ZM4401	15 39 087 171	234
ZM5111	15 39 087 303	218
ZM5112	15 39 087 452	218
ZM5113	15 39 087 453	218
ZM5114	15 39 095 300	216
ZM5115	15 39 095 450	216
ZM5116	15 39 096 300	216
ZM5117	15 39 096 450	216
ZM5118	15 39 097 300	217
ZM5119	15 39 097 450	217
ZM5123	15 39 087 070	219
ZM5125	15 39 085 070	219
ZM5133	15 39 087 120	219
ZM5135	15 39 085 120	220
ZM5143	15 39 087 210	220
ZM5145	15 39 085 210	220
ZM5153	15 39 087 280	220
ZM5155	15 39 085 280	220
ZM5160	15 39 098 300	217
ZM5161	15 39 098 450	217
ZM5165	15 39 084 002	215
ZM5166	15 39 084 003	215
ZM5168	15 39 094 300	215
ZM5169	15 39 094 450	216
ZM5172	15 44 102 400	214
ZM5173	15 44 103 603	214
ZM5333	15 39 087 122	221
ZM5343	15 39 087 212	221
ZM5353	15 39 087 282	221
ZM5432	15 39 085 092	235
ZM5442	15 39 085 182	235
ZM5452	15 39 085 242	235
ZM6123	15 39 087 071	221
ZM6125	15 39 085 071	221
ZM6133	15 39 087 123	222
ZM6135	15 39 085 121	222
ZM6143	15 39 087 213	222
ZM6145	15 39 085 211	222
ZM6153	15 39 087 283	222
ZM6155	15 39 085 281	223
ZM6333	15 39 087 125	223
ZM6343	15 39 087 215	223
ZM6353	15 39 087 285	223
ZM6442	15 39 085 183	236
ZM6452	15 39 085 243	236
ZM7150	15 39 087 150	226
ZM7151	15 39 087 180	226
ZM7152	15 39 087 320	227
ZM7153	15 39 087 151	226
ZM7154	15 39 087 181	227
ZM7155	15 39 087 321	227
ZM9000	15 90 900 001	239
ZM9001	15 90 900 002	239
ZN1110	15 48 111 000	252
ZN1111	15 48 111 100	253
ZN1112	15 48 111 200	253
ZN1120	15 48 112 000	252
ZN1210	15 48 121 000	251
ZN1220	15 48 122 000	252
ZN1310	15 48 131 000	253
ZN1320	15 48 132 000	254
ZN1330	15 48 133 000	254
ZN1340	15 48 134 000	254
ZN2120	15 48 212 000	252
ZN2130	15 48 213 000	253
Z00303	15 36 000 000	175
Z00304	15 36 020 000	175
Z00504	15 36 020 001	175
Z00704	15 36 020 002	176
ZPW218R	15 51 021 800	293
ZPW313I	15 55 313 000	293
ZPW513I	15 55 513 000	294
ZPW518R	15 51 051 800	293
Z01D11	15 25 731 230	125
Z01D13	15 25 731 429	125
Z01E01	15 25 743 247	124
Z01E03	15 25 743 439	124
Z01E21	15 25 731 240	126
Z01E21.3	15 25 731 241	126
Z01E23	15 25 731 439	126
Z01E23.3	15 25 731 440	126
Z01E24	15 25 731 112	126
Z01E41	15 25 731 242	128
Z01E43	15 25 731 441	128
Z01E44	15 25 731 113	128
Z03D11	15 25 731 226	129
Z03D13	15 25 731 425	129
Z03E01	15 25 731 438	129
Z03E03	15 25 731 459	129
Z03E21	15 25 731 236	130
Z03E21.3	15 25 731 237	130
Z03E23	15 25 731 435	130
Z03E23.3	15 25 731 436	131
Z03E24	15 25 731 110	131
Z03E41	15 25 731 238	131
Z03E43	15 25 731 437	132
Z03E44	15 25 731 111	132
Z04D11	15 25 733 270	130
Z04D13	15 25 733 463	130
Z04E21	15 25 733 289	131
Z04E23	15 25 733 482	131
Z05D75	15 25 733 502	123
Z05D76	15 25 733 501	123
Z05D77	15 25 733 128	122
Z05E21	15 25 733 277	118
Z05E23	15 25 733 470	118
Z05E31	15 25 733 278	118
Z05E33	15 25 733 471	118
Z05E41	15 25 733 279	119
Z05E41.3	15 25 733 282	119
Z05E43	15 25 733 472	119
Z05E43.3	15 25 733 475	119
Z05E44	15 25 733 121	119
Z05E51	15 25 733 280	120
Z05E51.3	15 25 733 284	120
Z05E53	15 25 733 473	120

Order Code	Item Number	page
Z05E53.3	15 25 733 477	120
Z05E54	15 25 733 122	120
Z05E61	15 25 733 281	121
Z05E61.3	15 25 733 285	121
Z05E63	15 25 733 474	121
Z05E63.3	15 25 733 478	121
Z05E64	15 25 733 123	122
Z05E71	15 25 733 286	122
Z05E73	15 25 733 479	122
Z05E74	15 25 733 124	122
Z05E81	15 25 733 287	123
Z05E83	15 25 733 480	123
Z05E84	15 25 733 125	123
Z05E91	15 25 743 215	124
Z05E93	15 25 743 408	124
Z05F52S	15 25 743 240	121
Z06D11	15 25 733 272	125
Z06D13	15 25 733 465	125
Z06E01	15 25 743 248	124
Z06E03	15 25 743 440	125
Z06E21	15 25 733 291	127
Z06E21.3	15 25 733 292	127
Z06E23	15 25 733 484	127
Z06E23.3	15 25 733 485	127
Z06E24	15 25 733 126	127
Z06E41	15 25 733 293	128
Z06E43	15 25 733 486	128
Z06E44	15 25 733 127	129
Z07D41	15 25 743 431	133
Z07D43	15 25 743 432	133
Z07E21	15 25 731 243	132
Z07E23	15 25 731 442	132
Z07E41	15 25 733 294	132
Z07E43	15 25 733 487	133
Z08338	15 25 730 423	137
Z08433	15 25 732 200	141
Z08434	15 25 732 400	141
Z08620	15 25 735 201	146
Z08620.2	15 25 735 202	147
Z08621	15 25 735 401	147
Z08621.2	15 25 735 402	147
Z08A26N	15 25 743 441	136
Z08A28N	15 25 743 442	136
Z08A46	15 25 743 443	140
Z08A48	15 25 743 444	140
Z08D17	15 25 743 433	135
Z08D18	15 25 743 434	135
Z08D19	15 25 743 435	136
Z08D32N	15 25 743 437	138
Z08D33N	15 25 743 436	138
Z08D34N	15 25 743 438	138
Z08D62	15 25 730 238	141
Z08D63	15 25 730 435	141
Z08D64	15 25 730 120	140
Z08E12	15 25 730 229	134
Z08E12.3	15 25 730 233	134
Z08E13	15 25 730 424	134
Z08E14	15 25 730 114	134
Z08E17	15 25 730 232	135
Z08E18	15 25 730 427	135
Z08E19	15 25 730 116	135
Z08E22	15 25 730 230	136
Z08E23	15 25 730 425	136
Z08E24	15 25 730 118	137
Z08E32N	15 25 730 239	137
Z08E33N	15 25 730 428	137
Z08E34N	15 25 730 121	137
Z08E42	15 25 730 225	139
Z08E42.3	15 25 730 228	139
Z08E42D	15 25 740 236	138
Z08E42S	15 25 740 237	139
Z08E43	15 25 730 419	139
Z08E43.3	15 25 730 422	140
Z08E44	15 25 730 112	140
Z08E44D	15 25 730 431	138
Z08E44S	15 25 730 432	139
Z08EL2	15 25 730 237	133
Z08EL3	15 25 730 434	133
Z08EL4	15 25 730 119	134
Z09140	15 25 731 208	157
Z09141	15 25 731 407	157
Z09526	15 25 736 207	141
Z09527	15 25 736 407	142
Z09535	15 25 736 209	142
Z09536	15 25 736 409	142
Z09544	15 25 736 210	143
Z09544.2	15 25 736 208	143
Z09545	15 25 736 410	143
Z09545.2	15 25 736 408	143
Z09C42	15 25 766 204	146
Z09C43	15 25 766 205	146
Z09C44	15 25 766 206	146
Z09D12	15 25 736 213	142
Z09D13	15 25 736 413	142
Z09D14	15 25 736 101	143
Z09D32	15 25 766 201	145
Z09D33	15 25 766 202	145
Z09D34	15 25 766 203	146
Z09E22	15 25 736 214	144
Z09E22.2	15 25 736 215	144
Z09E22D	15 25 736 212	145
Z09E23	15 25 736 414	144
Z09E23.2	15 25 736 415	144
Z09E24	15 25 736 102	144
Z09E24.2	15 25 736 103	145
Z09E24D	15 25 736 412	145
ZQW322R	15 25 501 500	105
ZQW514R	15 20 503 500	104
ZQW515R	15 20 503 501	104
ZQW516R	15 20 503 502	105
ZQW832R	15 25 500 500	105
ZR1433	15 44 104 032	203
ZR1532	15 44 104 820	204
ZR2212	15 41 181 200	203
ZR9001	15 42 009 001	212
ZR9002	15 42 009 002	212
ZR9010	15 42 009 010	212
ZR9011	15 42 009 011	212
ZR9020	15 42 009 020	212
ZR9021	15 42 009 021	212
ZR9034	15 42 009 034	213
ZR9035	15 42 009 035	213
ZR9036	15 44 100 000	213
ZR9310	15 48 931 000	255
ZS2110	15 31 211 010	274
ZS2120	15 31 211 020	274
ZS2130	15 31 211 030	274
ZS2140	15 31 211 040	275
ZS2160	15 39 300 621	275
ZS2161	15 39 301 021	275
ZS2163	15 39 300 622	275
ZS2164	15 39 301 022	276
ZS2166	15 39 300 623	276
ZS2167	15 39 301 023	276
ZS2214B	15 31 221 400	188
ZS2214W	15 31 221 401	188
ZS2221.2	15 31 222 120	197
ZS2224B	15 31 222 400	188
ZS2224W	15 31 222 401	189
ZS2231.2	15 31 223 120	197
ZS2234B	15 31 223 400	189
ZS2234W	15 31 223 401	189
ZS2244B	15 31 224 400	189
ZS2244W	15 31 224 401	189
ZS2254B	15 31 225 400	190
ZS2314B	15 31 231 400	190
ZS2314W	15 31 231 401	190
ZS2324B	15 31 232 400	190
ZS2324W	15 31 232 401	190
ZS2334B	15 31 233 400	191
ZS2334W	15 31 233 401	191
ZS2344B	15 31 234 400	191
ZS2344W	15 31 234 401	191
ZS2413	15 31 241 300	176
ZS2423	15 31 242 300	176
ZS2433	15 31 243 300	177
ZS2443	15 31 244 300	177
ZS2443A	15 31 244 310	177
ZS2453	15 31 245 300	177
ZS2453A	15 31 245 310	177
ZS2463	15 31 246 300	178
ZS2463A	15 31 246 310	178
ZS2473	15 31 247 300	178
ZS2512	15 31 251 200	182
ZS2513	15 31 251 300	186
ZS2514	15 31 291 000	184
ZS2522	15 31 252 200	182
ZS2523	15 31 252 300	186
ZS2524	15 31 292 000	184
ZS2532	15 31 253 200	182
ZS2533	15 31 253 300	186
ZS2534	15 31 293 000	184
ZS2542	15 31 254 200	183
ZS2543	15 31 254 300	186
ZS2544	15 31 295 000	185
ZS2553	15 31 255 300	187
ZS2554	15 31 296 000	185
ZS2612	15 31 242 612	179
ZS2622	15 31 242 622	179
ZS2632	15 31 242 632	179
ZS2642	15 31 242 642	180
ZS2652	15 31 242 652	180
ZS2662	15 31 242 662	180
ZS2672	15 31 242 672	180
ZS2712	15 31 242 712	180
ZS2722	15 31 242 722	181
ZS2732	15 31 242 732	181
ZS2742	15 31 242 742	181
ZS2812	15 31 281 200	197
ZS2813	15 42 032 000	198
ZS2822	15 31 282 200	198
ZS2823	15 42 033 000	198
ZS2832	15 31 283 200	198
ZS2833	15 42 035 000	198
ZS2912	15 31 291 200	183
ZS2913	15 31 291 300	187
ZS2914	15 31 291 010	184
ZS2922	15 31 292 200	183
ZS2923	15 31 292 300	187
ZS2924	15 31 292 020	184
ZS2932	15 31 293 200	183
ZS2933	15 31 293 300	187
ZS2934	15 31 293 030	185
ZS2942	15 31 294 200	183
ZS2943	15 31 294 300	187
ZS2944	15 31 295 050	185
ZS3213	15 31 223 500	199
ZS3213.2	15 31 223 502	200
ZS3214	15 31 224 500	199
ZS3214.2	15 31 224 502	200
ZS3215	15 31 225 500	199
ZS3215.2	15 31 225 402	200
ZS3322	15 42 033 220	196
ZS3323	15 31 251 011	194
ZS3332	15 42 033 320	196
ZS3333	15 31 251 021	195
ZS3333.2	15 31 251 051	195
ZS3342	15 42 033 420	196
ZS3343	15 31 251 031	195
ZS3343.2	15 31 251 061	195
ZS3353	15 31 251 041	195
ZS3360F	15 40 233 600	193
ZS3360S	15 42 033 601	193
ZS3361	15 42 306 000	194
ZS3362	15 42 304 500	194
ZS9010	15 31 900 010	192
ZS9020	15 31 900 020	192
ZS9030	15 31 900 030	192
ZS9510	15 31 950 010	193
ZT1040	15 46 138 800	172
ZT1521	15 46 138 400	171
ZT1521E	15 46 138 401	171
ZT1531	15 46 138 500	172
ZT1621	15 46 138 600	172
ZT1621E	15 46 138 601	172
ZT1631	15 46 138 700	172
ZT3021	15 46 139 900	174
ZT3121	15 46 140 000	174
ZT3221	15 46 140 100	174
ZT4320	15 46 137 700	173
ZT4420	15 46 137 800	173
ZT4520	15 46 137 900	173
ZTV55	15 51 550 000	295
ZTV65	15 51 650 000	294
ZTV75	15 51 750 000	294
ZU310.12	15 46 139 200	167
ZU310.6	15 46 139 000	166
ZU310.9	15 46 139 100	167
ZU315.12	15 46 139 500	167
ZU315.6	15 46 139 300	167
ZU315.9	15 46 139 400	167
ZU320.12	15 46 139 800	168
ZU320.6	15 46 139 600	168
ZU320.9	15 46 139 700	168
ZU9001	15 46 009 001	170
ZU9002	15 46 009 002	170
ZU9003	15 46 009 003	170
ZU9004	15 46 009 004	171
ZU9005	15 46 009 005	171
ZU901	15 46 140 200	169
ZU902	15 46 140 300	169
ZU903	15 46 140 400	169
ZU904	15 46 140 500	170
ZU9902	15 46 009 902	170
ZV1112	15 40 110 621	247
ZV1122	15 40 110 820	247
ZV1132	15 40 111 120	247
ZV1142	15 40 111 520	248
ZV1152	15 40 112 220	247
ZV1160	15 40 116 500	248
ZV1161	15 40 146 500	248
ZV1163	15 40 116 900	249
ZV1164	15 40 117 000	249
ZV2112	15 40 210 621	246
ZV2122	15 40 210 820	246
ZV2132	15 40 211 120	246
ZV2142	15 40 211 520	246
ZV2152	15 40 212 220	247
ZZ1435T	15 60 014 350	213
ZZ2055T	15 60 020 550	213
ZZ3070T	15 60 030 700	214
ZZ409BD	15 60 040 900	214

Item Number	Order Code	page
10 11 102 000	B1110	19
10 11 202 001	B11202	20
10 12 104 000	B12104	17
10 12 109 002	B1210F	18
10 12 114 000	B1211	17
10 12 204 000	B1220	18
10 12 209 002	B1220F	18
10 12 214 000	B1221	18
10 12 302 000	B1230	18
10 12 312 000	B1231	19
10 12 402 000	B1240	19
10 12 412 000	B1241	19
10 12 501 000	B1250	20
10 12 511 000	B1251	20
10 13 101 201	B0114T	11
10 13 102 002	B01102	10
10 13 121 001	B01116	11
10 13 122 000	B03112	5
10 13 122 001	B0110L	11
10 13 124 000	B03114	5
10 13 124 100	B02114	8
10 13 124 200	B01114	10
10 13 126 000	B0211V	8
10 13 128 001	B01138	10
10 13 201 201	B0124T	12
10 13 202 002	B01202	11
10 13 221 001	B0121G	12
10 13 222 000	B03212	6
10 13 222 001	B0120L	12
10 13 224 000	B03214	6
10 13 224 100	B02214	9
10 13 224 200	B01214	11
10 13 226 000	B0221V	9
10 13 228 001	B01238	12
10 13 302 001	B01302	12
10 13 304 001	B01304	13
10 13 322 000	B03312	7
10 13 322 100	B02312	9
10 13 322 200	B01312	13
10 13 402 001	B01402	13
10 13 404 001	B01404	13
10 13 422 000	B03412	7
10 13 422 100	B02412	10
10 13 422 200	B01412	13
10 13 501 001	B01501	17
10 13 521 000	B03511	16
10 13 521 100	B02511	16
10 13 521 200	B01511	16
10 13 601 000	B1360	14
10 13 800 000	B0125T	14
10 14 120 120	B0212F	8
10 14 122 000	B02112	7
10 14 128 000	B02138	8
10 14 220 120	B0222F	9
10 14 222 000	B02212	8
10 14 228 000	B02238	9
10 17 101 000	B0314G	6
10 17 126 000	B03116	6
10 17 201 000	B0324G	7
10 17 226 000	B03216	6
10 21 001 111	B13021	35
10 21 001 115	B1302	35
10 21 002 311	B13001	33
10 21 002 315	B1300	33
10 21 002 512	B1306	34
10 21 002 515	B1395	36
10 21 002 711	B13011	33
10 21 002 715	B1301	34
10 21 002 911	B13951	35
10 21 047 612	B1303	35
10 21 091 012	B1305	34
10 21 230 003	B30234	34
10 22 000 111	B1501	21
10 22 000 112	B15012U	22
10 22 000 211	B1502	23
10 22 000 412	B15112	22
10 22 000 511	B1505	23
10 22 000 611	B1506	21
10 22 000 711	B15212	22
10 22 000 911	B1509	23
10 24 110 200	B0412L	15
10 24 114 000	B04114	14
10 24 118 000	B04138	14
10 24 130 100	B0410G	15
10 24 210 200	B0422L	16
10 24 214 000	B04214	15
10 24 218 000	B04238	15
10 24 230 100	B0420G	15
10 32 122 062	B25162	44
10 32 122 090	B25112	44
10 32 124 080	B26184	43
10 32 124 081	B25184	45
10 32 124 090	B25114	45
10 32 126 080	B2618V	43
10 32 126 081	B27186	48
10 32 126 082	B25186	45
10 32 126 090	B2511V	45
10 32 222 131	B25232	45
10 32 222 211	B25212	46
10 32 222 260	B25272	46
10 32 224 200	B26204	43
10 32 224 201	B2629	44
10 32 224 210	B25214	46
10 32 224 260	B25274	46
10 32 226 200	B2620V	44
10 32 226 212	B2521V	47
10 32 226 213	B27216	48
10 32 226 214	B25216	46
10 32 226 260	B2527V	47
10 32 322 301	B2533	47
10 32 422 300	B2543	47
10 32 521 021	B2552	48
10 41 007 601	B13763	39
10 41 007 610	B3176G	37
10 41 007 611	B13762	36
10 41 007 615	B1376	37
10 41 007 623	B13763UP	36
10 41 016 411	B3164G	39
10 41 017 711	B3177G	40
10 41 018 610	B1386	40
10 41 018 611	B13861	39
10 41 018 910	B1389	37
10 41 018 911	B13892	37
10 41 019 110	B3191G	40
10 41 019 205	B13925	38
10 41 019 210	B3192G	38
10 41 019 211	B13921	37
10 41 062 511	B1325	39
10 41 760 014	B30764	38
10 42 102 511	B15101	30
10 42 103 011	B15711	30
10 42 121 611	B15651	30
10 42 121 615	B1565	30
10 42 122 011	B15201	24
10 42 122 015	B1520	24
10 42 122 511	B15221	31
10 42 161 611	B15601	24
10 42 161 615	B1560	32
10 42 162 011	B15701	25
10 42 162 015	B1570	25
10 42 163 215	B1595	32
10 42 163 221	B15951	25
10 42 201 604	B32164	26
10 42 201 611	B15161	25
10 42 201 615	B1516	26
10 42 201 623	B15163UP	25
10 42 202 511	B15251	26
10 42 202 514	B15254	26
10 42 202 515	B1525	27
10 42 202 523	B15253UP	26
10 42 202 524	B32254	29
10 42 203 211	B15322	27
10 42 203 214	B15324	27
10 42 203 215	B1532	27
10 42 203 223	B15323UP	27
10 42 203 224	B32324	29
10 42 203 225	B15325UP	28
10 42 232 011	B15451	31
10 42 232 511	B15431	31
10 42 233 011	B15441	31
10 42 235 411	B15231	31
10 42 243 011	B15301	28
10 42 243 014	B32304	29
10 42 243 015	B1530	28
10 42 245 011	B15851	28
10 42 245 014	B32854	29
10 42 245 015	B1585	28
10 42 247 711	B15771	32
10 42 303 211	B15331	32
10 43 035 721	B3357F1	41
10 43 038 921	B3389F1	41
10 43 039 221	B3392F1	41
10 44 001 026	B35106	42
10 44 001 306	B35136	42
10 44 031 206	B35126	42
10 44 067 506	B35756	42
12 01 000 100	B9641	53
12 01 000 500	B9651	53
12 01 000 520	B9659	53
12 01 000 600	B9652	53
12 01 000 700	B9653	54
12 01 000 800	B9654	54
12 01 000 850	B9656	54
12 01 000 900	B9655	54
12 01 002 600	B9672	53
12 01 002 800	B9674	54
12 01 002 900	B9675	54
12 01 003 300	B9679	54
12 01 003 500	B9682	53
12 01 003 600	B9683	54
12 01 003 700	B9684	55
12 01 003 800	B9685	55
12 01 004 300	B9691	54
12 01 004 800	B9656V	54
13 20 114 000	B7911	50
13 20 118 000	B79118	50
13 20 214 000	B7921	50
13 20 218 000	B79218	51
13 21 112 000	B7811	49
13 21 212 000	B7821	49
13 26 023 205	B7332	52
13 32 112 040	B7414	51
13 32 212 030	B7426	51
14 39 013 900	P4711	101
14 39 013 902	P4721	102
14 39 013 903	P4723	102
14 40 004 901	P4535	88
14 40 004 904	P3210	81
14 40 004 908	P3214	82
14 40 011 100	P3150	78
14 40 011 203	P3160	78
14 40 011 500	P3116	79
14 40 012 111	P3113	80
14 40 013 114	P4702	81
14 40 013 115	P4703	98
14 40 013 116	P4706	98
14 40 013 123	P3170	77
14 40 013 125	P3114	79
14 40 013 129	P4716	100
14 40 013 130	P3324	94
14 40 013 901	P4726	101
14 40 014 100	P3115	79
14 40 032 202	P3861	81
14 40 032 400	P3862	82
14 40 033 104	P4722	100
14 40 041 500	P4010	82
14 40 043 100	P3327	95
14 40 093 109	P3848A	98
14 40 113 100	P4715	100
14 40 211 100	P3400	82
14 40 812 900	P3887	99
14 40 812 903	P4713	100
14 40 813 100	P3888	90
14 40 813 102	P4718	99
14 40 813 110	P3894	80
14 40 813 130	P3897	98
14 40 813 150	P4704	80
14 40 813 160	P4705	98
14 40 813 170	P3111	80
14 40 814 200	P4113	89
14 40 833 200	P4112	89
14 40 833 300	P4717	99
14 40 883 200	P3310K	94
14 41 162 100	P3521	84
14 41 203 100	P3528	84
14 41 212 901	P3540	85
14 41 233 110	P3531	83
14 41 250 920	P3534	84
14 41 263 110	P3536	84
14 41 273 110	P3537	85
14 41 283 110	P3538	97
14 41 292 150	P3541	83
14 41 317 000	P3542	85
14 41 341 100	P3539	84
14 41 351 500	P3543	85
14 41 361 900	P3544	85
14 41 371 900	P3545	86
14 41 381 900	P3546	86
14 46 002 000	P3920	93
14 46 002 100	P3921	93
14 46 002 200	P3922	93
14 46 002 300	P3923	92
14 47 003 100	P4006	82
14 48 000 040	P4104	102
14 49 000 030	P4203	90
14 49 000 050	P4205	90
14 50 000 280	P4531	88
14 50 000 291	P4540	87
14 50 000 300	P4533	87
14 50 000 310	P4534	87
14 50 000 320	P4536	87
14 50 000 330	P3180	77
14 50 000 340	P3190	77
14 50 000 350	P4537	88
14 50 000 360	P4538	88
14 50 000 370	P2311	91
14 50 000 400	P2313	91
14 50 000 410	P4714	100
14 50 000 413	P4720	99
14 50 000 420	P4542	86
14 50 000 430	P4543	87
14 50 000 440	P4544	88
14 50 000 450	P3118	79
14 50 000 460	P2314	91
14 50 000 470	P4719	99
14 50 000 480	P2315	92
14 50 000 490	P2317	92
14 50 000 500	P3215	83
14 50 000 510	P2316	92
14 50 000 520	P3120	79
14 50 000 530	P3121	78
14 50 000 540	P3122	78
14 50 000 550	P4545	89
14 50 000 560	P3216	83
14 50 000 570	P4724	101
14 50 000 580	P4546	89
14 50 000 590	P4725	101
14 51 085 670	P8567	74
14 51 701 200	P8502	72
14 51 701 900	P8569	74
14 51 703 110	P8507	72
14 51 703 200	P8506	71
14 51 703 300	P8504	72
14 51 703 402	P8508	72
14 51 703 500	P8555	75
14 51 704 100	P8511	71
14 51 704 101	P8572	75
14 51 704 200	P8582	75
14 51 704 201	P8512	72
14 51 704 300	P8583	76
14 51 704 400	P8584	76
14 51 704 600	P8571	75
14 51 705 300	P8573	76
14 51 705 400	P8574	76
14 51 710 500	P8105	73
14 51 710 700	P8107	73
14 54 000 100	GS13142	289
14 54 000 110	GS41151	292
14 54 000 200	GS31111	291
14 54 000 300	GS32111	292
14 54 000 400	GS11A51	289
14 54 000 500	GS11B51	290
14 54 000 600	GS14151	290
14 54 000 700	GS14251	290
14 54 000 800	GS15117	290
14 54 007 100	G1110	288
14 54 007 200	G1120	288
14 54 007 250	G1125	288
14 54 008 200	GS11111	289
14 54 009 200	G1150	289
14 54 013 200	GS22111	291
14 54 014 100	G1210	291
14 54 015 200	GS11151	289
14 54 016 100	GS12111	290
14 54 017 100	GS21111	292
14 54 194 000	ZIW194R	257
14 56 000 060	P3306	95
14 56 000 110	P3314	95
14 56 000 120	P3315	96
14 56 000 130	P3316	96
14 56 000 150	P3318	96
14 56 000 160	P3319	96
14 56 000 170	P3320	96
14 56 000 200	P3323	97
14 56 000 210	P3326	97
14 60 000 000	P3325	94
14 60 000 010	P3328	95
15 20 503 500	ZQW514R	104
15 20 503 501	ZQW515R	104
15 20 503 502	ZQW516R	105
15 24 014 023	Z6923	156
15 24 115 012	Z6915	157
15 25 283 273	ZF5147	105
15 25 283 274	ZF5147.3	106
15 25 283 275	ZF5157	106
15 25 283 276	ZF5157.3	106
15 25 283 279	ZF5167	107
15 25 283 410	ZF5148	106
15 25 283 411	ZF5148.3	106
15 25 283 412	ZF5158	107
15 25 283 413	ZF5158.3	107
15 25 283 417	ZF5168	107
15 25 500 500	ZQW832R	105
15 25 501 500	ZQW322R	105
15 25 730 112	ZQ8E44	140
15 25 730 114	ZQ8E14	134
15 25 730 116	ZQ8E19	135
15 25 730 117	ZL8F54	153
15 25 730 118	ZQ8E24	137
15 25 730 119	ZQ8EL4	134
15 25 730 120	ZQ8D64	140
15 25 730 121	ZQ8E34N	137
15 25 730 225	ZQ8E42	139
15 25 730 228	ZQ8E42.3	139
15 25 730 229	ZQ8E12	134
15 25 730 230	ZQ8E22	136
15 25 730 232	ZQ8E17	135
15 25 730 233	ZQ8E12.3	134
15 25 730 234	ZL8F02	152
15 25 730 235	ZL8F22	152
15 25 730 236	ZL8F52	152
15 25 730 237	ZQ8EL2	133
15 25 730 238	ZQ8D62	141
15 25 730 239	ZQ8E32N	137
15 25 730 419	ZQ8E43	139
15 25 730 422	ZQ8E43.3	140
15 25 730 423	ZQ8338	137
15 25 730 424	ZQ8E13	134
15 25 730 425	ZQ8E23	136
15 25 730 427	ZQ8E18	135
15 25 730 428	ZQ8E33N	137
15 25 730 429	ZL8F03	152
15 25 730 430	ZL8F23	152
15 25 730 431	ZQ8E44D	138
15 25 730 432	ZQ8E44S	139
15 25 730 433	ZL8F53	153
15 25 730 434	ZQ8EL3	133
15 25 730 435	ZQ8D63	141
15 25 731 110	ZQ3E24	131
15 25 731 111	ZQ3E44	132
15 25 731 112	ZQ1E24	126
15 25 731 113	ZQ1E44	128
15 25 731 208	ZQ9140	157
15 25 731 226	ZQ3D11	129
15 25 731 230	ZQ1D11	125
15 25 731 236	ZQ3E21	130
15 25 731 237	ZQ3E21.3	130
15 25 731 238	ZQ3E41	131
15 25 731 240	ZQ1E21	126
15 25 731 241	ZQ1E21.3	126
15 25 731 242	ZQ1E41	128
15 25 731 243	ZQ7E21	132
15 25 731 244	ZL3F22	151
15 25 731 246	ZL1F22	149
15 25 731 248	ZF3D02	114
15 25 731 249	ZF3D22	115
15 25 731 250	ZF3D42	115
15 25 731 251	ZF1D02	111
15 25 731 252	ZF1D22	112
15 25 731 253	ZF1D42	113
15 25 731 258	ZF3D52	115
15 25 731 259	ZF1D52	114
15 25 731 261	ZL3F47	151
15 25 731 262	ZL1F47	150
15 25 731 407	ZQ9141	157
15 25 731 425	ZQ3D13	129
15 25 731 429	ZQ1D13	125
15 25 731 435	ZQ3E23	130
15 25 731 436	ZQ3E23.3	131
15 25 731 437	ZQ3E43	132
15 25 731 438	ZQ3E01	129
15 25 731 439	ZQ1E23	126
15 25 731 440	ZQ1E23.3	126
15 25 731 441	ZQ1E43	128
15 25 731 442	ZQ7E23	132
15 25 731 445	ZF3D03	114
15 25 731 446	ZF3D23	115
15 25 731 447	ZF3D43	115
15 25 731 448	ZF1D03	112
15 25 731 449	ZF1D23	112
15 25 731 450	ZF1D43	113
15 25 731 451	ZL6F23	150
15 25 731 452	ZL3F23	151
15 25 731 453	ZF3A43	108
15 25 731 454	ZF1A43	108
15 25 731 455	ZF3D53	116
15 25 731 456	ZF1D53	114
15 25 731 457	ZL3F48	151
15 25 731 458	ZL1F48	150
15 25 731 459	ZQ3E03	129
15 25 732 200	ZQ8433	141
15 25 732 400	ZQ8434	141
15 25 733 121	ZQ5E44	119
15 25 733 122	ZQ5E54	120
15 25 733 123	ZQ5E64	122
15 25 733 124	ZQ5E74	122
15 25 733 125	ZQ5E84	123
15 25 733 126	ZQ6E24	127
15 25 733 127	ZQ6E44	129
15 25 733 128	ZQ5D77	122
15 25 733 270	ZQ4D11	130
15 25 733 272	ZQ6D11	125
15 25 733 277	ZQ5E21	118
15 25 733 278	ZQ5E31	118
15 25 733 279	ZQ5E41	119
15 25 733 280	ZQ5E51	120
15 25 733 281	ZQ5E61	121
15 25 733 282	ZQ5E41.3	119
15 25 733 284	ZQ5E51.3	120
15 25 733 285	ZQ5E61.3	121
15 25 733 286	ZQ5E71	122
15 25 733 287	ZQ5E81	123
15 25 733 289	ZQ4E21	131
15 25 733 291	ZQ6E21	127
15 25 733 292	ZQ6E21.3	127
15 25 733 293	ZQ6E41	128
15 25 733 294	ZQ7E41	132
15 25 733 463	ZQ4D13	130
15 25 733 465	ZQ6D13	125
15 25 733 470	ZQ5E23	118
15 25 733 471	ZQ5E33	118
15 25 733 472	ZQ5E43	119
15 25 733 473	ZQ5E53	120
15 25 733 474	ZQ5E63	121
15 25 733 475	ZQ5E43.3	119
15 25 733 477	ZQ5E53.3	120
15 25 733 478	ZQ5E63.3	121
15 25 733 479	ZQ5E73	122
15 25 733 480	ZQ5E83	123
15 25 733 482	ZQ4E23	131
15 25 733 484	ZQ6E23	127
15 25 733 485	ZQ6E23.3	127
15 25 733 486	ZQ6E43	128
15 25 733 487	ZQ7E43	133
15 25 733 497	ZF5D23	108
15 25 733 498	ZF5D43	109
15 25 733 499	ZF5D53	110
15 25 733 501	ZQ5D76	123
15 25 733 502	ZQ5D75	123
15 25 735 201	ZQ8620	146
15 25 735 202	ZQ8620.2	147
15 25 735 401	ZQ8621	147
15 25 735 402	ZQ8621.2	147
15 25 736 101	ZQ9D14	143
15 25 736 102	ZQ9E24	144
15 25 736 103	ZQ9E24.2	145
15 25 736 207	ZQ9526	141
15 25 736 208	ZQ9544.2	143
15 25 736 209	ZQ9535	142
15 25 736 210	ZQ9544	143
15 25 736 212	ZQ9E22D	145
15 25 736 213	ZQ9D12	142
15 25 736 214	ZQ9E22	144
15 25 736 215	ZQ9E22.2	144
15 25 736 407	ZQ9527	142
15 25 736 408	ZQ9545.2	143

Item Number	Order Code	page
15 25 736 409	ZQ9536	142
15 25 736 410	ZQ9545	143
15 25 736 412	ZQ9E24D	145
15 25 736 413	ZQ9D13	142
15 25 736 414	ZQ9E23	144
15 25 736 415	ZQ9E23.2	144
15 25 737 401	ZF5754	117
15 25 740 236	ZQ8E42D	138
15 25 740 237	ZQ8E42S	139
15 25 741 258	ZF3A42	108
15 25 741 259	ZF1A42	107
15 25 741 451	ZL1F23	150
15 25 743 201	ZL4F22	151
15 25 743 202	ZL6F22	150
15 25 743 203	ZF5D22	108
15 25 743 204	ZF5D42	109
15 25 743 205	ZF5D52	109
15 25 743 206	ZF5D62	110
15 25 743 208	ZF5D82	111
15 25 743 209	ZF6D02	112
15 25 743 210	ZF6D22	113
15 25 743 211	ZF6D42	113
15 25 743 212	ZF2D52	117
15 25 743 213	ZF2D62	116
15 25 743 214	ZF2D82	116
15 25 743 215	ZQ5E91	124
15 25 743 224	Z57032	153
15 25 743 225	Z58032	154
15 25 743 226	Z52032	154
15 25 743 227	Z55032	154
15 25 743 228	Z53012	153
15 25 743 237	ZF5D42.3	109
15 25 743 238	ZF5D52D	110
15 25 743 239	ZF5D62D	111
15 25 743 240	ZQ5F52S	121
15 25 743 241	ZL5F47	147
15 25 743 242	ZL5F57	149
15 25 743 243	ZL5F67	149
15 25 743 244	ZL5F47.3	148
15 25 743 245	ZL5F47.6	148
15 25 743 247	ZQ1E01	124
15 25 743 248	ZQ6E01	124
15 25 743 400	ZF5D63	110
15 25 743 401	ZF5D83	111
15 25 743 402	ZF6D03	112
15 25 743 403	ZF6D23	113
15 25 743 404	ZF6D43	114
15 25 743 405	ZF2D53	117
15 25 743 406	ZF2D63	116
15 25 743 407	ZF2D83	116
15 25 743 408	ZQ5E93	124
15 25 743 409	ZF5751	117
15 25 743 416	ZF5D43.3	109
15 25 743 417	ZF5D54D	110
15 25 743 418	ZF5D64D	111
15 25 743 419	ZL5F48	148
15 25 743 420	ZL5F58	149
15 25 743 421	ZL5F68	149
15 25 743 422	ZL5F48.3	148
15 25 743 423	ZL5F48.6	148
15 25 743 431	ZQ7D41	133
15 25 743 432	ZQ7D43	133
15 25 743 433	ZQ8D17	135
15 25 743 434	ZQ8D18	135
15 25 743 435	ZQ8D19	136
15 25 743 436	ZQ8D33N	138
15 25 743 437	ZQ8D32N	138
15 25 743 438	ZQ8D34N	138
15 25 743 439	ZQ1E03	124
15 25 743 440	ZQ6E03	125
15 25 743 441	ZQ8A26N	136
15 25 743 442	ZQ8A28N	136
15 25 743 443	ZQ8A46	140
15 25 743 444	ZQ8A48	140
15 25 766 201	ZQ9D32	145
15 25 766 202	ZQ9D33	145
15 25 766 203	ZQ9D34	146
15 25 766 204	ZQ9C42	146
15 25 766 205	ZQ9C43	146
15 25 766 206	ZQ9C44	146
15 25 813 200	Z59D01	155
15 25 813 201	Z50B11	156
15 25 813 202	Z5AI01	155
15 25 813 204	Z5CS11	156
15 25 813 205	Z59G01	155
15 25 813 206	Z55311	154
15 25 813 207	Z57311	154
15 25 813 208	Z52311	155
15 25 813 209	Z58311	155
15 27 000 800	ZE0101	158
15 27 001 200	ZE0102	158
15 27 101 400	ZE0203	158
15 28 001 402	ZE0505A	158
15 28 020 000	ZE0304	159
15 28 021 000	ZE0305	159
15 28 022 000	ZE0306	159
15 31 211 010	ZS2110	274
15 31 211 020	ZS2120	274
15 31 211 030	ZS2130	274
15 31 211 040	ZS2140	275
15 31 221 400	ZS2214B	188
15 31 221 401	ZS2214W	188
15 31 222 120	ZS2221.2	197
15 31 222 400	ZS2224B	188
15 31 222 401	ZS2224W	189
15 31 223 120	ZS2231.2	197
15 31 223 400	ZS2234B	189
15 31 223 401	ZS2234W	189
15 31 223 500	ZS3213	199
15 31 223 502	ZS3213.2	200
15 31 224 400	ZS2244B	189
15 31 224 401	ZS2244W	189
15 31 224 500	ZS3214	199
15 31 224 502	ZS3214.2	200
15 31 225 400	ZS2254B	190
15 31 225 402	ZS3215.2	200
15 31 225 500	ZS3215	199
15 31 231 400	ZS2314B	190
15 31 231 401	ZS2314W	190
15 31 232 400	ZS2324B	190
15 31 232 401	ZS2324W	190
15 31 233 400	ZS2334B	191
15 31 233 401	ZS2334W	191
15 31 234 400	ZS2344B	191
15 31 234 401	ZS2344W	191
15 31 241 300	ZS2413	176
15 31 242 300	ZS2423	176
15 31 242 612	ZS2612	179
15 31 242 622	ZS2622	179
15 31 242 632	ZS2632	179
15 31 242 642	ZS2642	180
15 31 242 652	ZS2652	180
15 31 242 662	ZS2662	180
15 31 242 672	ZS2672	180
15 31 242 712	ZS2712	180
15 31 242 722	ZS2722	181
15 31 242 732	ZS2732	181
15 31 242 742	ZS2742	181
15 31 243 300	ZS2433	177
15 31 244 300	ZS2443	177
15 31 244 310	ZS2443A	177
15 31 245 300	ZS2453	177
15 31 245 310	ZS2453A	177
15 31 246 300	ZS2463	178
15 31 246 310	ZS2463A	178
15 31 247 300	ZS2473	178
15 31 251 011	ZS3323	194
15 31 251 021	ZS3333	195
15 31 251 031	ZS3343	195
15 31 251 041	ZS3353	195
15 31 251 051	ZS3333.2	195
15 31 251 061	ZS3343.2	195
15 31 251 200	ZS2512	182
15 31 251 300	ZS2513	186
15 31 252 200	ZS2522	182
15 31 252 300	ZS2523	186
15 31 253 200	ZS2532	182
15 31 253 300	ZS2533	186
15 31 254 200	ZS2542	183
15 31 254 300	ZS2543	186
15 31 255 300	ZS2553	187
15 31 281 200	ZS2812	197
15 31 282 200	ZS2822	198
15 31 283 200	ZS2832	198
15 31 291 000	ZS2514	184
15 31 291 010	ZS2914	184
15 31 291 200	ZS2912	183
15 31 291 300	ZS2913	187
15 31 292 000	ZS2524	184
15 31 292 020	ZS2924	184
15 31 292 200	ZS2922	183
15 31 292 300	ZS2923	187
15 31 293 000	ZS2534	184
15 31 293 030	ZS2934	185
15 31 293 200	ZS2932	183
15 31 293 300	ZS2933	187
15 31 294 200	ZS2942	183
15 31 294 300	ZS2943	187
15 31 295 000	ZS2544	185
15 31 295 050	ZS2944	185
15 31 296 000	ZS2554	185
15 31 900 010	ZS9010	192
15 31 900 020	ZS9020	192
15 31 900 030	ZS9030	192
15 31 950 010	ZS9510	193
15 35 235 000	Z73215	161
15 35 236 000	Z73216	160
15 35 237 000	Z73225	161
15 35 238 000	Z73226	161
15 35 239 000	Z73235	162
15 35 240 000	Z73236	162
15 35 247 000	Z73115	163
15 35 248 000	Z73116	163
15 35 249 000	Z73125	163
15 35 250 000	Z73126	163
15 35 251 000	Z73135	164
15 35 252 000	Z73136	164
15 35 253 000	Z73217	160
15 35 254 000	Z73218	160
15 35 255 000	Z73227	161
15 35 256 000	Z73228	161
15 35 257 000	Z73237	162
15 35 258 000	Z73238	162
15 36 000 000	Z00303	175
15 36 020 000	Z00304	175
15 36 020 001	Z00504	175
15 36 020 002	Z00704	176
15 38 150 200	Z7599B	281
15 38 150 201	Z7599W	281
15 38 154 000	Z7602W	280
15 38 155 000	Z7602B	281
15 38 156 000	Z7602P	281
15 38 157 000	Z7602BL	281
15 38 176 000	Z7615	284
15 38 179 000	Z7617	285
15 38 182 000	Z7619B	280
15 38 183 000	Z7619W	280
15 38 190 000	Z7626	282
15 38 191 000	Z7627	282
15 38 196 000	Z7630W	282
15 38 197 000	Z7630B	283
15 38 198 000	Z7631	283
15 38 199 000	Z7633	283
15 38 200 000	Z7634	283
15 38 200 100	Z7635B	284
15 38 200 200	Z7635W	283
15 38 200 300	Z7636W	284
15 38 200 400	Z7636B	284
15 38 200 500	Z7637B	285
15 38 200 600	Z7637W	284
15 38 200 700	Z7638B	282
15 38 200 800	Z7638W	282
15 38 200 900	Z7639	285
15 38 201 000	Z7640W	277
15 38 201 100	Z7640P	278
15 38 201 200	Z7640GR	278
15 38 201 300	Z7641B	279
15 38 201 400	Z7641W	278
15 38 201 500	Z7642B	278
15 38 201 600	Z7642GL	278
15 38 201 700	Z7644W	279
15 38 201 800	Z7644P	279
15 38 201 900	Z7644BL	280
15 38 202 000	Z7644G	280
15 38 202 100	Z7645	285
15 38 202 200	Z7643W	279
15 38 202 300	Z7643B	279
15 38 900 010	Z7901	286
15 38 900 020	Z7902	286
15 38 900 030	Z7903	286
15 38 900 040	Z7904	286
15 38 900 050	Z7905	287
15 39 043 050	ZM4311	230
15 39 043 060	ZM4312	231
15 39 043 070	ZM4313	231
15 39 043 080	ZM4314	231
15 39 071 140	ZM3130	232
15 39 071 240	ZM3131	232
15 39 072 141	ZM3230	232
15 39 072 240	ZM3231	233
15 39 081 150	ZM4121	228
15 39 081 240	ZM4122	229
15 39 082 150	ZM4321	229
15 39 082 151	ZM4323	229
15 39 082 240	ZM4322	229
15 39 082 241	ZM4324	230
15 39 084 002	ZM5165	215
15 39 084 003	ZM5166	215
15 39 084 050	ZM3415	224
15 39 084 080	ZM3416	224
15 39 084 120	ZM3418	224
15 39 085 050	ZM3405	224
15 39 085 070	ZM5125	219
15 39 085 071	ZM6125	221
15 39 085 080	ZM3406	225
15 39 085 090	ZD1432	250
15 39 085 092	ZM5432	235
15 39 085 110	ZM3407	225
15 39 085 120	ZM5135	220
15 39 085 121	ZM6135	222
15 39 085 122	ZM3408	225
15 39 085 123	ZM1120	236
15 39 085 130	ZM3408M	226
15 39 085 150	ZM4328	230
15 39 085 180	ZD1442	250
15 39 085 181	ZD2442	251
15 39 085 182	ZM5442	235
15 39 085 183	ZM6442	236
15 39 085 184	ZM1121	236
15 39 085 186	ZM1400	237
15 39 085 187	ZM1402	237
15 39 085 188	ZM1404	238
15 39 085 189	ZM1406	238
15 39 085 190	ZM3409	225
15 39 085 210	ZM5145	220
15 39 085 211	ZM6145	222
15 39 085 220	ZM1401	237
15 39 085 221	ZM1403	238
15 39 085 222	ZM1405	238
15 39 085 223	ZM1407	238
15 39 085 240	ZM4329	230
15 39 085 241	ZD2452	251
15 39 085 242	ZM5452	235
15 39 085 243	ZM6452	236
15 39 085 244	ZD1452	250
15 39 085 245	ZM1122	237
15 39 085 280	ZM5155	220
15 39 085 281	ZM6155	223
15 39 085 360	ZM4325	229
15 39 085 900	ZM3406M	225
15 39 087 070	ZM5123	219
15 39 087 071	ZM6123	221
15 39 087 120	ZM5133	219
15 39 087 122	ZM5333	221
15 39 087 123	ZM6133	222
15 39 087 125	ZM6333	223
15 39 087 150	ZM7150	226
15 39 087 151	ZM7153	226
15 39 087 170	ZM4400	234
15 39 087 171	ZM4401	234
15 39 087 180	ZM7151	226
15 39 087 181	ZM7154	227
15 39 087 210	ZM5143	220
15 39 087 212	ZM5343	221
15 39 087 213	ZM6143	222
15 39 087 215	ZM6343	223
15 39 087 280	ZM5153	220
15 39 087 282	ZM5353	221
15 39 087 283	ZM6153	222
15 39 087 285	ZM6353	223
15 39 087 303	ZM5111	218
15 39 087 320	ZM7152	227
15 39 087 321	ZM7155	227
15 39 087 452	ZM5112	218
15 39 087 453	ZM5113	218
15 39 094 300	ZM5168	215
15 39 094 450	ZM5169	216
15 39 095 300	ZM5114	216
15 39 095 450	ZM5115	216
15 39 096 300	ZM5116	216
15 39 096 450	ZM5117	216
15 39 097 300	ZM5118	217
15 39 097 450	ZM5119	217
15 39 098 300	ZM5160	217
15 39 098 450	ZM5161	217
15 39 102 420	ZM4316	231
15 39 300 621	ZS2160	275
15 39 300 622	ZS2163	275
15 39 300 623	ZS2166	276
15 39 301 021	ZS2161	275
15 39 301 022	ZS2164	276
15 39 301 023	ZS2167	276
15 39 402 000	ZM3012	227
15 39 402 010	ZM3013	228
15 39 402 020	ZM3014	228
15 39 402 420	ZM4315	231
15 39 402 421	ZM4317	232
15 39 722 000	ZM3010	233
15 39 722 010	ZM3020	233
15 40 110 613	ZD1124	244
15 40 110 621	ZV1112	247
15 40 110 623	ZD1125	244
15 40 110 820	ZV1122	247
15 40 111 120	ZV1132	247
15 40 111 214	ZD1134	245
15 40 111 224	ZD1135	244
15 40 111 520	ZV1142	248
15 40 111 813	ZD1144	245
15 40 111 823	ZD1145	245
15 40 112 220	ZV1152	247
15 40 112 413	ZD1154	245
15 40 112 423	ZD1155	245
15 40 115 510	ZD3121	240
15 40 115 570	ZD3122	240
15 40 116 500	ZV1160	248
15 40 116 900	ZV1163	249
15 40 117 000	ZV1164	249
15 40 125 510	ZD3221	240
15 40 125 570	ZD3222	241
15 40 140 670	ZD1323	243
15 40 141 270	ZD1333	244
15 40 141 870	ZD1343	244
15 40 146 500	ZV1161	248
15 40 210 612	ZD2124	242
15 40 210 621	ZV2112	246
15 40 210 622	ZD2125	242
15 40 210 820	ZV2122	246
15 40 211 120	ZV2132	246
15 40 211 213	ZD2134	242
15 40 211 223	ZD2135	242
15 40 211 520	ZV2142	246
15 40 211 813	ZD2144	243
15 40 211 823	ZD2145	243
15 40 212 220	ZV2152	247
15 40 212 413	ZD2154	243
15 40 212 424	ZD2155	243
15 40 233 600	ZS3360F	193
15 40 240 670	ZD2323	241
15 40 241 270	ZD2333	241
15 40 241 870	ZD2343	242
15 41 181 200	ZR2212	203
15 42 009 001	ZR9001	212
15 42 009 002	ZR9002	212
15 42 009 010	ZR9010	212
15 42 009 011	ZR9011	212
15 42 009 020	ZR9020	212
15 42 009 021	ZR9021	212
15 42 009 034	ZR9034	213
15 42 009 035	ZR9035	213
15 42 032 000	ZS2813	198
15 42 033 000	ZS2823	198
15 42 033 220	ZS3322	196
15 42 033 320	ZS3332	196
15 42 033 420	ZS3342	196
15 42 033 601	ZS3360S	193
15 42 035 000	ZS2833	198
15 42 304 500	ZS3362	194
15 42 306 000	ZS3361	194
15 43 081 000	ZALL	201
15 43 121 000	ZALT	201
15 43 151 000	ZALX	201
15 43 191 000	ZAL192	202
15 43 381 000	ZAL382	202
15 43 999 000	ZALAP	202
15 43 999 001	ZALAR	202
15 43 999 002	ZALAS	202
15 44 100 000	ZR9036	213
15 44 102 220	ZB2110	206
15 44 102 221	ZB2120	206
15 44 102 400	ZM5172	214
15 44 103 027	ZB2154	205
15 44 103 320	ZB1114	203
15 44 103 321	ZB1124	204
15 44 103 322	ZB1524	205
15 44 103 603	ZM5173	214
15 44 103 610	ZB1223	207
15 44 103 622	ZB2214	208
15 44 103 623	ZB2224	208
15 44 103 628	ZB1214	207
15 44 103 629	ZB1224	207
15 44 103 630	ZB3214	208
15 44 103 643	ZB1614	209
15 44 103 644	ZB1624	210
15 44 103 645	ZB2410	211
15 44 103 655	ZB2420	211
15 44 103 656	ZB2210	208
15 44 103 657	ZB2220	209
15 44 104 032	ZR1433	203
15 44 104 052	ZB221H	209
15 44 104 053	ZB222H	209
15 44 104 820	ZR1532	204
15 44 202 220	ZB4110	206
15 44 202 221	ZB4120	206
15 44 203 320	ZB3114	204
15 44 203 321	ZB3124	204
15 44 203 322	ZB3524	205
15 44 203 620	ZB3614	210
15 44 203 621	ZB3624	210
15 45 000 080	ZC0108	271
15 45 000 090	ZC0109	271
15 45 000 100	ZC0110	271
15 45 000 110	ZC0111	272
15 45 000 180	ZCA0313	272
15 45 000 190	ZCA0316	272
15 45 000 200	ZCA0123	272
15 45 000 210	ZCA0323	273
15 45 000 220	ZCA0126	273
15 45 000 230	ZCA0326	273
15 45 000 240	ZCD0123	273
15 45 000 250	ZCD0323	273
15 45 000 900	GS15114	291
15 46 009 001	ZU9001	170
15 46 009 002	ZU9002	170
15 46 009 003	ZU9003	170
15 46 009 004	ZU9004	171
15 46 009 005	ZU9005	171
15 46 009 902	ZU9902	170
15 46 101 000	ZAB101	297
15 46 102 001	ZAB102	297
15 46 103 000	ZAB103	298
15 46 137 700	ZT4320	173
15 46 137 800	ZT4420	173
15 46 137 900	ZT4520	173
15 46 138 400	ZT1521	171
15 46 138 401	ZT1521E	171
15 46 138 500	ZT1531	172
15 46 138 600	ZT1621	172
15 46 138 601	ZT1621E	172
15 46 138 700	ZT1631	172
15 46 138 800	ZT1040	172
15 46 139 000	ZU310.6	166
15 46 139 100	ZU310.9	167
15 46 139 200	ZU310.12	167
15 46 139 300	ZU315.6	167
15 46 139 400	ZU315.9	167
15 46 139 500	ZU315.12	167
15 46 139 600	ZU320.6	168
15 46 139 700	ZU320.9	168
15 46 139 800	ZU320.12	168
15 46 139 900	ZT3021	174
15 46 140 000	ZT3121	174
15 46 140 100	ZT3221	174
15 46 140 200	ZU901	169
15 46 140 300	ZU902	169
15 46 140 400	ZU903	169
15 46 140 500	ZU904	170
15 46 901 000	ZAB901	298
15 46 902 000	ZAB902	298
15 46 903 000	ZAB903	299
15 46 911 000	ZAB911	299
15 46 912 000	ZAB912	299
15 46 913 000	ZAB913	299
15 48 111 000	ZN1110	252
15 48 111 100	ZN1111	253
15 48 111 200	ZN1112	253
15 48 112 000	ZN1120	252

Item Number	Order Code	page
15 48 121 000	ZN1210	251
15 48 122 000	ZN1220	252
15 48 131 000	ZN1310	253
15 48 132 000	ZN1320	254
15 48 133 000	ZN1330	254
15 48 134 000	ZN1340	254
15 48 212 000	ZN2120	252
15 48 213 000	ZN2130	253
15 48 931 000	ZR9310	255
15 50 000 000	DCPW01	302
15 50 000 001	DCPW02	302
15 50 000 056	DCCV19	304
15 50 000 057	DCCV20	304
15 50 000 181	DCCW05	303
15 50 000 196	DCCV25	303
15 50 001 006	DCCV07	303
15 50 001 010	DCCV11	304
15 50 001 011	DCCV12	304
15 50 001 012	DCCV13	304
15 50 001 013	DCLV01	303
15 50 001 014	DCLV02	303
15 50 001 023	DCPV01	302
15 50 001 024	DCCV21	304
15 50 001 029	DCCV22	304
15 50 001 031	DCCV16	304
15 50 001 032	DCCV17	303
15 50 005 000	DCPZ01	302
15 50 030 032	D3ZW01	300
15 50 032 009	D3ZC01	300
15 50 050 004	D5AW01	301
15 50 052 004	D5AC01	301
15 50 054 006	D5AM01	301
15 50 055 002	D5AP01	301
15 50 090 001	DCH001	305
15 50 090 002	DCH002	305
15 51 021 800	ZPW218R	293
15 51 051 800	ZPW518R	293
15 51 550 000	ZTV55	295
15 51 650 000	ZTV65	294
15 51 750 000	ZTV75	294
15 52 112 000	ZG112S	259
15 52 121 000	ZG121S	258
15 52 122 000	ZG122S	258
15 52 131 000	ZG131S	259
15 52 132 000	ZG132S	259
15 53 151 000	ZG151S	260
15 53 161 000	ZG161S	257
15 53 162 000	ZG162S	257
15 53 165 000	ZG165S	258
15 53 166 000	ZG166S	258
15 53 172 000	ZG172S	270
15 54 000 000	ZGD010P	260
15 54 000 001	ZGA010P	261
15 54 000 002	ZGA020P	261
15 54 000 003	ZGA040P	261
15 54 000 004	ZGB010P	262
15 54 000 005	ZGB020P	262
15 54 000 006	ZGB040P	262
15 54 000 007	ZGC010P	263
15 54 000 008	ZGC040P	263
15 54 000 009	ZGG010P	265
15 54 000 010	ZGH010P	266
15 54 000 011	ZGH040P	266
15 54 000 012	ZGI010P	266
15 54 000 013	ZGL010P	268
15 54 000 014	ZGL020P	269
15 54 001 000	ZGD070P	260
15 54 002 000	ZGA0A0P	261
15 54 002 001	ZGA0C0P	262
15 54 002 002	ZGC0A0P	263
15 54 002 003	ZGL0A0P	269
15 54 002 004	ZGL0C0P	269
15 54 020 000	ZGF010P	265
15 54 020 001	ZGF020P	265
15 54 112 000	ZGE014L	264
15 54 112 001	ZGE044L	264
15 54 112 200	ZGE0A4L	264
15 54 112 201	ZGE0C4L	264
15 54 181 000	ZIW181R	256
15 54 184 000	ZIW184R	256
15 54 191 000	ZIW191R	256
15 54 202 000	ZGJ044S	267
15 54 202 200	ZGJ0B4S	267
15 54 202 201	ZGJ0F4S	267
15 54 204 000	ZGK044S	268
15 54 204 200	ZGK0B4S	268

Item Number	Order Code	page
15 55 015 000	ZIW15CR	296
15 55 017 000	ZIW17FR	296
15 55 022 000	ZIW22AR	295
15 55 034 000	ZCW34BR	277
15 55 110 000	ZCW11BR	297
15 55 111 000	ZCW11WR	296
15 55 154 000	ZIW154R	296
15 55 223 000	ZIW223R	296
15 55 249 000	ZIW249R	295
15 55 269 000	ZIW269R	295
15 55 313 000	ZPW313I	293
15 55 426 000	ZIW426R	295
15 55 513 000	ZPW513I	294
15 60 014 350	ZZ1435T	213
15 60 020 550	ZZ2055T	213
15 60 030 700	ZZ3070T	214
15 60 040 900	ZZ409BD	214
15 90 900 001	ZM9000	239
15 90 900 002	ZM9001	239
16 03 026 000	N9221	60
16 03 027 000	N9321	60
16 03 030 000	N9361	60
16 04 822 110	B50224	58
16 04 842 300	B50439	58
16 04 842 301	B50434	58
16 04 844 112	B50444D	58
16 04 845 114	B53457P	59
16 04 845 210	B50457	59
16 04 845 300	B534530	60
16 04 846 114	B50460D	59
16 04 849 120	B56499	57
16 04 863 101	B50630	59
16 04 882 110	B50829	59
16 06 025 000	N1014	68
16 08 000 001	N1015	69
16 11 632 000	B6320GY	61
16 11 640 500	B6405GY	61
16 11 641 000	B6410BE	61
16 11 641 001	B6410BL	62
16 11 642 000	B6420B	62
16 13 053 100	B0531B	62
16 13 053 200	B0532B	63
16 13 054 500	B0545B	62
16 13 055 100	B0551BL	63
16 13 055 101	B0551GY	63
16 13 055 102	B0551S	63
16 13 055 200	B0552RG	63
16 13 055 201	B0552AG	64
16 13 055 501	B0555GY	64
16 13 055 502	B0555BL	64
16 13 056 000	B0560B	64
16 13 056 100	B0561B	64
16 13 057 100	B0571B	65
16 13 057 200	B0572B	65
17 02 010 034	J58133	446
17 02 010 035	J5810	446
17 03 060 022	N3110N	67
17 03 100 022	N3111N	68
17 03 150 022	N3112N	68
17 03 225 022	N3113N	68
17 04 022 600	V01B10	66
17 04 022 700	V02B15	67
17 04 022 800	V03G35	66
17 04 022 900	V02G20	65
17 04 023 000	V01G20	65
17 04 023 100	V04G45	66
17 04 023 200	V05G65	66
17 04 023 300	V06G120	66
17 04 023 400	V02C48	67
17 04 023 500	V1TG65	67
18 04 000 100	K1731	413
18 04 000 300	K1821	413
18 04 000 500	K1851	414
18 04 000 600	K1731.2	414
18 04 000 601	K1821.2	414
18 04 000 602	K1851.2	414
18 04 100 100	K1331	412
18 04 100 300	K1421	413
18 04 100 500	K1451	412
18 04 100 701	K1331.2	415
18 04 100 702	K1421.2	415
18 04 100 703	K1451.2	415
18 04 300 100	R5060	413
18 04 300 200	R5060.2	415
18 07 100 300	K7311	413
18 07 100 400	K7321	413

Item Number	Order Code	page
18 07 100 500	K7331	413
18 07 100 700	K7351	413
18 07 100 800	K7321.2	415
18 07 100 801	K7331.2	415
18 07 100 802	K7351.2	415
18 07 100 803	R5850.2	415
18 07 100 804	R5852.2	415
18 07 200 100	R5639	414
18 07 200 300	R5553	414
18 07 200 500	R5850	414
18 07 200 600	R5851	414
18 07 200 700	R5852	414
18 07 201 000	R5639.2	415
18 07 300 100	R5602	413
18 07 300 200	R5610	413
18 07 300 300	R5602.2	416
18 07 300 301	R5610.2	416
18 11 000 200	K9304	414
18 21 000 100	K0101	411
18 21 000 400	K0141	411
18 21 000 500	K0102	411
18 21 000 600	K0151	412
18 21 000 700	K0103	411
18 21 000 800	K0301	412
18 21 100 100	K0201	411
18 21 100 200	K0202	411
18 21 100 300	K0311	412
18 21 100 301	K0312	412
19 01 010 150	P0111	344
19 01 010 200	P0112	344
19 01 010 300	P0113	346
19 01 010 302	P0113R	344
19 01 010 500	P0115	346
19 01 010 504	P0115R	344
19 01 010 505	P0115RZ	344
19 01 010 700	P0117	346
19 01 010 701	P0117R	344
19 01 011 000	P0110	346
19 01 011 003	P01710R	342
19 01 011 004	P0110R	344
19 01 012 000	P01120	344
19 01 012 016	P01320R	347
19 01 012 500	P01125	345
19 01 012 504	P01725R	342
19 01 013 000	P01130	345
19 01 014 000	P01140	345
19 01 021 001	P0601	342
19 01 021 500	P0602	342
19 01 022 001	P0603	342
19 01 022 500	P0604	342
19 01 210 150	PC0111	345
19 01 210 301	PC0113R	345
19 01 210 500	PC0115R	345
19 01 211 000	P01710	343
19 01 212 000	P01720	343
19 01 213 000	P01730	343
19 01 611 000	P01410W	343
19 01 612 000	P01420W	343
19 01 811 005	P01110	345
19 02 010 150	P01301	347
19 02 010 300	P01303	347
19 02 010 500	P01705	343
19 02 010 501	P01305	347
19 02 020 141	P02114	334
19 02 020 142	P0211E	334
19 02 020 150	P0221U	355
19 02 020 200	P0212U	334
19 02 020 201	P0212	335
19 02 020 300	P0213	332
19 02 030 150	P0311	335
19 02 030 200	P0312	335
19 02 030 300	P0313	339
19 02 030 308	P0313R	335
19 02 030 500	P0315	339
19 02 030 508	P0315R	335
19 02 030 700	P0317	339
19 02 030 701	P0317R	335
19 02 031 000	P0310	339
19 02 031 008	P0310R	335
19 02 040 150	P0411	335
19 02 040 190	P04119U	335
19 02 040 200	P0412	335
19 02 040 300	P0413	339
19 02 040 303	P0413R	336
19 02 040 500	P0415	340
19 02 040 505	P0415R	336

Item Number	Order Code	page
19 02 040 700	P0417	340
19 02 040 701	P0417R	336
19 02 041 000	P0410	340
19 02 041 002	P0410R	336
19 02 050 150	P0511	336
19 02 050 200	P0512	336
19 02 050 300	P0513	340
19 02 050 308	P0513R	336
19 02 050 500	P0515	340
19 02 050 508	P0515R	336
19 02 050 700	P0517	340
19 02 050 701	P0517R	336
19 02 051 000	P0510	340
19 02 051 008	P0510R	336
19 02 060 200	P0612	337
19 02 060 300	P0613	340
19 02 060 301	P0613R	337
19 02 060 500	P0615	340
19 02 060 501	P0615R	337
19 02 120 140	P12114	337
19 02 120 200	P0212CQ	334
19 02 120 201	P1212	330
19 02 120 300	P1213	337
19 02 130 121	P1311	330
19 02 130 155	P13115	330
19 02 130 200	P1312	330
19 02 130 203	P1312Z	333
19 02 130 206	P1312CU	330
19 02 130 207	P1312FC	330
19 02 130 300	P1313	340
19 02 130 308	P1313R	330
19 02 130 500	P1315	341
19 02 130 508	P1315R	330
19 02 130 700	P1317	341
19 02 130 701	P1317R	331
19 02 131 000	P1310	341
19 02 131 008	P1310R	331
19 02 140 200	P1412	331
19 02 140 300	P1413	341
19 02 140 301	P1413R	331
19 02 140 500	P1415	341
19 02 140 502	P1415R	331
19 02 140 700	P1417	341
19 02 140 701	P1417R	331
19 02 141 000	P1410	339
19 02 141 001	P1410R	331
19 02 150 200	P1512	331
19 02 150 300	P1513	339
19 02 150 305	P1513CU	331
19 02 150 308	P1513R	331
19 02 150 309	P1513FC	332
19 02 150 500	P1515	339
19 02 150 508	P1515R	332
19 02 150 700	P1517	338
19 02 150 701	P1517R	332
19 02 151 000	P1510	339
19 02 151 008	P1510R	332
19 02 160 200	P1612	332
19 02 160 300	P1613	338
19 02 160 303	P1613R	332
19 02 160 500	P1615	338
19 02 160 502	P1615R	332
19 02 210 150	PC01301	347
19 02 210 300	PC01303	347
19 02 210 500	PC01305	347
19 02 230 160	PC0311	332
19 02 230 200	PC0312	332
19 02 230 300	PC0313	338
19 02 230 301	PC0313R	332
19 02 230 500	PC0315	338
19 02 230 501	PC0315R	333
19 02 240 300	PC0413	338
19 02 240 301	PC0413R	333
19 02 240 500	PC0415	338
19 02 240 501	PC0415R	333
19 02 250 200	PC0512	333
19 02 250 300	PC0513	338
19 02 250 301	PC0513R	333
19 02 330 150	PC1311	333
19 02 330 153	P1311PD	334
19 02 330 154	P1321PD	355
19 02 330 200	PC1312	333
19 02 330 300	PC1313	338
19 02 330 301	PC1313R	333
19 02 330 500	PC1315	338
19 02 330 501	PC1315R	334

Item Number	Order Code	page
19 02 340 300	PC1413	337
19 02 340 301	P14131	329
19 02 340 302	PC1413R	334
19 02 340 500	PC1415	337
19 02 340 501	P14151	329
19 02 340 502	PC1415R	334
19 02 341 000	P14101	329
19 02 350 200	PC1512	334
19 02 350 300	PC1513	337
19 02 350 301	PC1513R	334
19 02 830 300	P1313RZ	333
19 02 940 203	P1412SM	341
19 03 030 001	P0300N	348
19 03 030 002	P0300T	348
19 03 040 002	P0400N	348
19 03 050 001	P0500N	348
19 03 050 002	P0500T	348
19 03 060 001	P0600N	348
19 03 130 001	P1300N	349
19 03 130 002	P1300T	349
19 03 140 001	P1400N	349
19 03 150 001	P1500N	349
19 03 150 002	P1500T	349
19 03 160 001	P1600N	349
19 04 030 000	P0003C	383
19 04 040 000	P0004C	383
19 05 010 003	P0072	388
19 05 010 005	P0074	388
19 05 020 020	P0028N	389
19 05 020 030	P0076PD	388
19 05 030 023	P0024N	390
19 05 030 030	P0025	389
19 05 030 040	P0026	389
19 05 030 050	P0030	388
19 05 030 070	P0023N	390
19 05 030 080	P0024FR	390
19 05 040 001	P0040	388
19 05 110 000	P0027	389
19 05 110 001	P0067	391
19 05 110 002	P00271	389
19 05 111 001	P0068	392
19 05 120 000	P0062	388
19 05 120 004	P0070	392
19 05 120 010	P0063	388
19 05 120 030	P0069	392
19 05 120 040	P0073	388
19 05 120 050	P0078	387
19 05 130 000	P0029	389
19 05 130 003	P0026S	389
19 06 010 100	P0042	387
19 06 010 300	P0044	387
19 06 010 400	P0045	387
19 06 010 502	A6001.0	496
19 06 010 503	A6001.1	496
19 06 010 504	A6002.0	493
19 06 010 507	A6000.3	495
19 06 010 508	A6001.2	496
19 06 010 509	A6001.3	496
19 06 010 510	A6002.2	495
19 06 010 511	A6000.4	496
19 06 010 512	A6000.5	493
19 06 010 513	A6000.7	494
19 06 010 514	A6000.6	496
19 06 100 020	P0035	386
19 06 100 040	P0037	387
19 06 100 050	P0039	386
19 06 100 060	P0050	386
19 06 100 090	P0066	386
19 06 110 200	P0034	386
19 06 110 300	P0038	386
19 06 200 100	A6100.0	493
19 06 200 101	A6100.1	493
19 06 200 102	A6100.2	494
19 06 200 103	A6100.3	494
19 06 200 104	A6100.4	494
19 06 200 105	A6100.5	495
19 06 200 106	A6100.6	495
19 06 200 107	A6100.7	495
19 06 200 108	A6100.8	495
19 06 200 109	A6100.9	495
19 06 300 100	A6004.2	494
19 06 300 101	A6004.1	494
19 06 300 102	A6004.0	494
19 06 300 103	A6003.0	494
19 06 300 104	A6004.3	494
19 06 300 105	A6004.4	494

Item Number	Order Code	page
19 06 300 106	A6004.7	495
19 06 300 107	A6004.6	495
19 06 300 108	A6004.5	495
19 06 300 109	A6003.1	496
19 06 300 110	A6004.8	496
19 06 300 111	A6004.9	496
19 07 010 010	P5502	393
19 07 010 020	P5503	393
19 07 010 030	P5504	393
19 07 010 054	P5508N	392
19 07 110 010	P5501	394
19 07 110 020	P5506	394
19 07 110 040	P5507N	394
19 08 012 501	P19125	374
19 08 015 001	P19150	374
19 08 042 501	P19425	375
19 08 042 510	P19425P	375
19 08 042 512	P194253	375
19 08 045 001	P19450	375
19 08 045 010	P19450P	375
19 08 045 020	P194504	376
19 08 141 001	P19410N	376
19 08 141 500	P194151	376
19 08 142 001	P19420	376
19 08 142 500	P194252	376
19 08 143 001	P19430	377
19 08 242 000	P08420	372
19 08 242 503	P084251	372
19 08 242 514	P084255	372
19 08 245 003	P084501	372
19 08 245 012	P084505	373
19 08 432 500	P193250	370
19 08 442 500	P084254	373
19 08 445 000	P084504	373
19 08 542 500	P084253	373
19 08 544 000	P08440	373
19 08 545 000	P084503	374
19 08 732 000	P08520W	371
19 08 742 500	P08525W	371
19 08 745 000	P08550W	371
19 08 842 500	P084256	374
19 09 010 000	P53893	362
19 09 030 150	P54013	362
19 09 030 151	P54014	362
19 09 030 152	P54213	367
19 09 030 153	P54214	367
19 09 040 200	P54012	363
19 09 040 201	P54022	363
19 09 040 202	P54212	368
19 09 040 203	P54222	366
19 09 050 153	P53871	363
19 09 050 154	P53872	363
19 09 050 301	P53873	363
19 09 050 302	P53874	364
19 09 050 503	P53876	364
19 09 060 151	P54015	364
19 09 060 152	P54018	364
19 09 060 153	P54215	367
19 09 060 154	P54218	366
19 09 060 301	P54016	364
19 09 060 302	P54019	365
19 09 060 303	P54216	367
19 09 060 304	P54219	366
19 09 060 500	P54017	365
19 09 060 501	P54217	367
19 09 080 152	P53898	365
19 09 080 153	P53899	365
19 09 480 300	P54052	365
19 09 480 301	P54252	366
19 10 000 900	P0056N	390
19 10 001 000	P0055E	390
19 10 001 100	P0055U	391
19 10 001 200	P0056U	391
19 11 000 050	P5805	395
19 12 310 500	P0115Z	346
19 14 031 100	PM0501	368
19 14 031 150	PM0502	368
19 14 031 200	PM0503	368
19 14 031 250	PM0504	368
19 14 031 300	PM0505	369
19 14 071 100	PM0902	369
19 14 071 200	PM0904	369
19 14 071 250	PM0905	369
19 14 081 102	PM1102	369
19 14 081 103	PM1103	369
19 14 081 104	PM1104	369

Item Number	Order Code	page
19 14 081 105	PM1105	370
19 14 090 072	PM1011	369
19 16 055 510	P5551	385
19 16 055 520	P5552	385
19 16 555 300	P5553	385
19 16 555 400	P5554	385
19 21 010 202	P0122	360
19 21 010 302	P0123R	359
19 21 010 503	P0125R	359
19 21 010 504	P01805	357
19 21 010 701	P0127R	359
19 21 011 002	P0120R	359
19 21 011 003	P01810R	358
19 21 011 502	P01215R	360
19 21 012 001	P01220R	360
19 21 012 500	P01225R	360
19 21 012 502	P01825R	358
19 21 013 001	P01230R	360
19 21 021 000	P0701	358
19 21 021 502	P0702	358
19 21 022 000	P0703	358
19 21 022 502	P0704	358
19 21 031 000	P01810	357
19 21 032 000	P01820	358
19 21 033 000	P01830	358
19 21 210 150	PC0121R	360
19 21 210 300	PC0123R	360
19 21 210 501	PC0125R	360
19 21 611 000	P01510W	359
19 21 612 000	P01520W	359
19 21 811 005	P01210R	360
19 22 010 150	P0121	360
19 22 020 141	P02214E	355
19 22 030 150	P0321	354
19 22 030 153	P0321R	351
19 22 030 200	P0322	354
19 22 030 308	P0323R	351
19 22 030 508	P0325R	351
19 22 040 150	P0421	354
19 22 040 152	P0421R	351
19 22 040 191	P04219GU	355
19 22 040 302	P0423R	352
19 22 040 400	P0422	355
19 22 040 502	P0425R	352
19 22 050 150	P0521	354
19 22 050 153	P0521R	352
19 22 050 201	P0522	355
19 22 050 308	P0523R	352
19 22 050 508	P0525R	352
19 22 060 151	P0621	355
19 22 060 200	P0622	354
19 22 060 302	P0623R	353
19 22 060 502	P0625R	353
19 22 120 200	P0222CQ	356
19 22 130 150	P1321	354
19 22 130 156	P1321R	351
19 22 130 200	P1322	354
19 22 130 202	P1322PD	356
19 22 130 203	P1322CU	356
19 22 130 204	P1322FC	356
19 22 130 308	P1323R	351
19 22 130 508	P1325R	351
19 22 140 152	P1421R	351
19 22 140 153	P1421	356
19 22 140 200	P1422	354
19 22 140 302	P14231	350
19 22 140 303	P1423R	352
19 22 140 503	P1425R	352
19 22 150 154	P1521R	352
19 22 150 155	P1521	356
19 22 150 200	P1522	354
19 22 150 306	P1523CU	356
19 22 150 308	P1523R	352
19 22 150 309	P1523FC	356
19 22 150 508	P1525R	352
19 22 160 152	P1621R	353
19 22 160 153	P1621	356
19 22 160 200	P1622	355
19 22 160 302	P1623R	353
19 22 160 502	P1625R	353
19 22 330 150	PC1321	355
19 22 330 152	PC1321R	353
19 22 340 151	PC1421R	353
19 22 340 301	PC1423R	353
19 22 340 501	P14251	350
19 22 340 502	PC1425R	353

Item Number	Order Code	page
19 22 341 000	P14201	350
19 22 350 151	PC1521R	353
19 22 360 150	PC1621R	354
19 22 570 150	PS1721	355
19 22 940 201	P1422SM	357
19 23 030 000	P0320	361
19 23 050 000	P0520	361
19 23 130 000	P1320	361
19 23 150 000	P1520	361
19 25 010 000	P0075	388
19 25 020 000	P00252N	390
19 25 020 001	P0077PD	387
19 25 030 020	P00242	390
19 25 030 040	P00262	389
19 25 030 050	P00272	389
19 25 030 060	P00282	389
19 25 030 090	P00292	388
19 26 010 100	P0047	386
19 26 010 200	P0049	386
19 27 010 010	P5522	392
19 27 010 023	P5523N	393
19 27 110 012	P5521N	391
19 27 110 033	P5526N	391
19 27 110 034	P5525N	393
19 28 042 500	P09225	382
19 28 042 501	P09225M	381
19 28 042 504	P092251	381
19 28 042 507	P19427	381
19 28 044 000	P09240	382
19 28 044 001	P09240M	382
19 28 045 000	P09250	382
19 28 045 003	P092501	381
19 28 141 000	P19510	383
19 28 141 500	P19515	383
19 28 142 000	P09220	382
19 28 242 500	P08225	380
19 28 242 502	P19222	379
19 28 245 000	P08250	380
19 28 245 003	P19223	379
19 28 432 500	P192250	377
19 28 441 500	P08215	379
19 28 542 500	P19625	380
19 28 544 000	P19224	379
19 28 545 011	P19221	380
19 28 732 000	P08620W	378
19 28 733 300	P19733	377
19 28 742 500	P08625W	378
19 28 745 000	P08650W	378
19 28 842 500	P082251	380
19 31 000 020	P5822	394
19 36 055 310	P5531	385
19 36 055 320	P5532	384
19 36 553 300	P5533	384
19 36 553 400	P5534	384
19 50 010 205	A1397.2	498
19 50 010 206	A1397.3	498
19 50 010 207	A1396.3	497
19 50 010 208	A1396.4	497
19 50 011 201	A1399	497
19 50 011 202	A1398.2	497
19 50 011 203	A1398.3	498
19 50 011 204	A1398.4	498
19 50 011 205	A1397.4	498
19 50 011 206	A1397.5	498
19 50 011 207	A1396.2	498
19 50 730 420	D730420	507
19 50 730 421	D730421	507
19 50 730 422	D730422	507
19 50 730 423	D730423	507
19 50 730 427	D730427	507
19 50 730 429	D730429	507
20 01 151 010	F61511	516
20 01 151 020	F61512	516
20 01 151 030	F61513	517
20 01 151 040	F61514	517
20 01 151 050	F61515	517
20 01 151 060	F61516	517
20 01 151 070	F61517	518
20 01 151 090	F61519	518
20 01 151 092	F615992	518
20 01 151 100	F61590	518
20 01 191 020	F61912	518
20 01 192 010	F61921	519
20 01 192 020	F61922	519
20 01 192 030	F61923	519
20 01 192 040	F61924	519

Item Number	Order Code	page
20 01 192 050	F61925	519
20 01 192 060	F61926	520
20 01 192 070	F61927	520
20 01 192 090	F61929	520
20 01 192 099	F61999	517
20 01 251 020	F62512	516
20 02 151 520	F6515	522
20 02 191 020	F6910	522
20 02 502 002	F6030	523
20 03 191 020	F51912	523
20 03 250 320	F52503	523
20 03 250 520	F52502	522
20 04 752 500	F87525	523
20 05 000 010	F6070	524
20 05 060 900	F6090	520
20 05 061 000	F6100	521
20 05 061 100	F6110	521
20 05 062 000	F6200	521
20 05 062 010	F6210	521
20 05 063 000	F6300	521
20 05 063 010	F6301	522
20 05 063 020	F6302	522
20 06 000 000	F6060	523
20 06 000 010	F6080	524
21 01 103 000	P5681	484
21 01 104 000	P5682	484
21 01 106 000	P5604	483
21 01 106 001	P5603R	484
21 01 106 010	P5614	482
21 01 107 000	P5683	484
21 01 108 000	P5684	484
21 01 109 000	P5685	485
21 01 110 000	P5686	485
21 01 111 000	P5608	483
21 01 112 000	P5618	482
21 01 208 000	P56060T	483
21 01 209 000	P5607	483
21 01 211 000	P56A01	482
21 01 212 000	P56S01F	480
21 01 213 000	P56S01	479
21 01 214 000	P56A02	483
21 01 307 000	P5616OT	482
21 01 308 000	P5611OTR	485
21 01 309 000	P5611OT	482
21 01 310 000	P56S11	479
21 01 311 000	P56A11	481
21 01 501 020	P56402	488
21 01 501 021	P56402PL	488
21 01 505 000	P56500	487
21 01 505 003	P56450	487
21 01 505 006	P56502	487
21 01 900 000	P56201	480
21 01 900 001	P56211	480
21 01 900 002	P56201UF	480
21 01 900 012	P56201BUF	480
21 01 900 017	P5631S	481
21 04 101 000	P56501	487
21 04 102 000	P56300	488
21 04 103 000	P56500S	486
21 04 105 000	P56400S	486
21 04 107 000	P56503X	488
21 05 560 010	PW56001	491
21 05 562 010	PW56201	490
21 05 562 020	PW56202	490
21 06 000 100	P5660FR	485
21 06 000 200	P5660SH	485
21 06 000 300	P56601FR	481
21 06 000 400	P56601SH	481
21 07 561 000	P56PR1	489
21 07 562 000	P56PR2	489
21 07 563 000	P56PR3	489
21 07 956 100	P56EXT1	489
22 01 017 000	M0016	476
22 01 018 000	M0017	476
22 01 020 000	M0018N	475
22 01 021 000	M0048N	475
22 01 022 000	M0012AN	475
22 01 023 000	M0014AN	476
22 01 024 000	M0003BN	476
22 01 025 000	M0071N	476
22 01 026 000	M0049N	477
22 02 022 000	M0230N	472
22 02 023 000	M0430N	472
22 02 024 000	M3216N	472
22 02 025 000	M3620N	473
22 02 026 000	M3691N	473

Item Number	Order Code	page
22 02 027 000	M0305N	473
22 02 028 000	M0400N	473
22 02 029 000	M0320N	473
22 02 030 000	M0391N	474
22 02 031 000	M0420N	474
22 02 032 000	M2092N	474
22 03 003 000	N0322	475
22 05 000 020	M0007AN	477
22 06 000 020	M0502	477
22 06 000 040	M0503N	477
22 06 000 050	M0501N	478
23 04 000 400	S4001R	474
23 04 000 500	S4003N	474
23 05 021 000	S5271	423
23 05 021 100	S5273	423
23 05 023 000	S5272	424
23 05 032 010	S5378	425
23 05 050 201	S5231S	423
23 05 058 401	S5213	420
23 05 059 009	S5194	424
23 05 100 200	S5141	422
23 05 100 201	S5241S	422
23 05 113 000	S5261	421
23 05 113 002	S5262	421
23 05 113 003	S5268	421
23 05 113 500	S5265	422
23 05 113 502	S5266	422
23 05 113 600	S5269	421
23 05 120 005	S5385	423
23 05 120 010	S5373	425
23 05 120 020	S5374	425
23 05 120 030	S5375	425
23 05 120 040	S5376	425
23 05 130 010	S5381E	424
23 05 135 000	S5382	424
23 05 135 010	S5383	424
23 05 500 000	S5252	422
23 05 500 002	S5253	423
23 08 201 550	S8130	418
23 08 203 510	S8231	417
23 08 203 550	S8230	418
23 08 205 010	S8251	417
23 08 205 050	S8250	418
23 08 207 500	S8307	416
23 08 207 510	S8271	417
23 08 207 550	S8270	419
23 08 210 000	S8310	416
23 08 210 010	S8281	418
23 08 210 050	S8280	419
23 08 215 000	S8314	416
23 08 215 010	S8291	418
23 08 215 050	S8290	419
23 08 225 000	S8324	417
23 08 305 050	S8253	419
23 08 307 550	S8273	419
23 08 310 050	S8283	420
23 08 315 050	S8293	420
23 08 325 000	S8405	417
23 09 010 010	S9121	406
23 09 010 020	S9122	409
23 09 010 030	S9123	409
23 09 010 040	S9124	409
23 09 010 050	S9125	409
23 09 010 060	S9126	410
23 09 010 070	S9127	410
23 09 010 100	S9130	410
23 09 010 130	S9135	406
23 09 010 140	S9136	405
23 09 010 150	S9137	405
23 09 010 160	S9231	408
23 09 020 010	S9131	408
23 09 020 020	S9132	408
23 09 110 010	S9221	407
23 09 110 020	S9222	407
23 09 110 030	S9223	407
23 09 110 040	S9224	407
23 09 110 050	S9225	407
23 09 210 010	S9141	406
23 09 210 020	S9142	406
23 09 210 030	S9143	406
23 33 001 010	SL0101	427
23 33 003 010	SL0301	426
23 33 020 010	SL2001	426
23 33 101 011	S10100	430
23 33 101 013	S10102	429
23 33 101 014	S10103	429

Item Number	Order Code	page
23 33 101 015	S10110	429
23 33 101 016	S10101	430
23 33 101 031	S10300	429
23 33 101 032	S10310	429
23 33 101 051	S10500	429
23 33 101 052	S10510	429
23 33 101 070	S10000	430
23 33 101 100	S11000	429
23 33 130 051	S30500	428
23 33 130 052	S30510	428
23 33 130 101	S31000	428
23 33 130 102	S31010	428
23 33 130 120	S30100	429
23 33 130 121	S30110	429
23 33 130 151	S31500	427
23 33 130 152	S31510	427
23 33 130 250	S30200	428
23 33 130 251	S30210	428
23 33 130 350	S30300	428
23 33 130 351	S30310	428
23 33 130 750	S30700	428
23 33 130 751	S30710	428
23 33 131 150	SB3115	426
23 33 170 010	S70203	427
23 33 170 021	S70200	427
23 33 170 022	S70201	427
23 33 170 023	S70202	427
23 35 050 030	SM5003	433
23 35 050 050	SM5105	433
23 35 070 420	SM7004B	433
23 35 071 310	SM7013W	432
23 35 072 100	SM7021BL	432
23 35 072 200	SM7022BL	431
23 35 072 210	SM7028BL	430
23 35 072 220	SM7029BL	430
23 35 072 500	SM7025W	431
23 35 072 501	SM7025BL	431
23 35 076 011	SM7026	431
23 35 076 013	SM7027W	431
23 35 076 014	SM7015W	432
23 35 076 020	SM7009BL	432
23 35 076 021	SM7008BL	432
24 00 517 252	S1111	401
24 01 520 132	S12252	400
24 01 720 132	S15272	400
24 01 720 232	S19272	400
24 01 730 132	S15273	400
24 01 730 232	S19273	400
24 01 750 132	S15275	400
24 01 750 232	S19275	401
24 02 720 132	S08272	401
24 02 720 232	S09272	401
24 02 730 232	S08273	401
24 02 730 232	S09273	401
24 13 120 132	S14312	402
24 13 120 232	S18312	402
24 13 130 132	S14313	402
24 13 130 232	S18313	403
24 13 150 132	S14315	402
24 13 150 232	S18315	403
24 13 220 132	S14322	402
24 13 220 232	S18322	403
24 13 230 132	S14323	402
24 13 230 232	S18323	403
24 13 250 132	S14325	402
24 13 250 232	S18325	403
24 13 720 132	S14372	401
24 13 720 232	S18372	402
24 13 730 132	S14373	401
24 13 730 232	S18373	402
24 13 750 132	S14375	402
24 21 130 212	S03030	397
24 21 130 213	S03030N	397
24 21 130 214	S03031N	397
24 21 150 212	S03050	397
24 21 150 213	S03050N	398
24 21 230 230	S03330	397
24 21 250 230	S03350	397
24 25 130 210	S03130N	399
24 25 130 220	S03130	398
24 25 150 210	S03150N	399
24 25 150 220	S03150	398
24 25 210 210	S03210N	399
24 25 230 210	S03230N	399
24 25 230 220	S03230	398
24 25 250 210	S03250N	399

Item Number	Order Code	page
24 25 250 220	S03250	398
24 25 430 230	S03430	398
24 25 450 230	S03450	398
24 35 724 032	S00003	399
25 01 000 100	J0200	442
25 01 000 200	J0203	442
25 01 000 300	J0240	441
25 01 000 330	J0240E	441
25 01 000 400	J0260	441
25 01 100 100	J0220J	442
25 01 100 300	J0222	441
25 03 000 100	J0197	443
25 03 000 400	J0198	443
25 04 200 100	J0199	443
25 04 500 110	J0102	444
25 04 600 110	J0103	444
25 04 700 110	J0104	444
25 06 000 800	J0400	446
25 07 100 600	J5802	445
25 07 100 700	J5803	444
25 08 000 810	J5709	445
25 08 000 900	J5710	445
25 08 100 100	J5711	445
25 08 100 200	J5712	445
25 12 000 100	J0401	412
25 20 236 400	J6014	440
25 20 900 088	J50988	440
25 20 900 089	J50989	440
25 21 000 030	J60030	447
25 21 000 110	J60110	447
25 21 000 130	J60130	447
25 21 000 140	J60140	447
25 21 000 170	J60170	447
26 03 013 000	E0041	312
26 03 015 000	E2157	318
26 03 016 001	E0121	311
26 03 016 002	E0422	312
26 03 118 000	E0042	312
26 03 119 002	E0129	311
26 03 119 003	E8636	312
26 03 124 000	E0114N	310
26 03 203 000	E0345	310
26 03 204 000	E0522	310
26 03 205 000	E6210	311
26 03 206 000	E0558	311
26 03 207 000	E0558P	312
26 03 208 000	E0558W	311
26 03 209 000	E00032	313
26 05 004 000	E0202	318
26 06 139 000	E3070	308
26 06 162 000	E6018	307
26 06 164 000	E6016	307
26 06 166 000	E0352	309
26 06 170 000	E5111	307
26 06 179 000	E8010	309
26 06 180 000	E0531	309
26 06 181 000	E8620	308
26 06 182 000	E8614	308
26 06 183 000	E8610	306
26 06 184 000	E8647N	308
26 06 185 000	E8647W	308
26 06 186 000	E8625	309
26 06 187 000	E6001	306
26 06 188 000	E6000	307
26 17 000 500	EV026	317
26 17 001 200	EV012	317
26 17 001 400	EV014	316
26 17 001 401	EV014B	316
26 17 001 600	EV016	317
26 17 002 000	EV020	318
26 17 002 300	EV023	317
26 17 002 500	EV025	317
26 17 002 600	EV029	318
26 17 010 400	EV104	316
26 17 010 500	EV105	316
26 17 010 600	EV106	315
26 17 010 902	EV112	315
26 18 002 600	E0086	323
26 18 002 700	E0090	323
26 18 002 800	E0091	323
26 27 303 000	E30300	319
26 31 600 100	H6001	321
26 31 600 200	H6002	320
26 31 600 400	H6004	320
26 31 600 600	H6006	320
26 31 610 100	H6101	322

Item Number	Order Code	page
26 31 610 200	H6102	321
26 31 690 100	H6901	321
26 31 690 100	H6901	322
26 31 690 200	H6902	322
26 31 690 300	H6903	321
26 93 000 120	E05018	313
26 93 000 180	E03070	313
26 93 000 220	E06018	313
26 93 000 230	E06016	314
26 93 000 240	E00387	314
26 93 000 250	E06000	314
27 02 029 000	J0685	438
27 02 031 000	J0701	435
27 02 033 000	J0703	435
27 02 034 000	J0704	436
27 02 035 000	J0705	436
27 02 038 000	J0708	436
27 02 039 000	J0709	436
27 03 105 000	J0665	439
27 03 106 000	J0666	439
27 04 030 000	J0680	439
27 04 039 000	J0690	439
27 04 280 010	J0669	439
27 04 310 000	J0801	438
27 04 320 000	J0802	437
27 04 330 000	J0803	437
27 04 340 000	J0804	437
27 04 350 000	J0806	437
27 04 560 000	J0906	438
27 04 570 000	J0907	438
28 04 000 013	C0024	455
28 04 000 014	C0025	455
28 04 000 030	C0030	455
30 10 000 291	H1085	454
30 10 000 292	H1086	454
30 10 000 293	H1087	453
30 10 000 294	H1088	454
30 10 002 017	H2017	453
30 10 002 020	H2020	454
30 10 002 050	H2050	453
30 10 002 060	H2060	453
30 10 003 010	H3010	452
30 10 003 015	H3015	452
30 10 003 016	H3016	452
30 10 003 017	H3017	452
30 10 003 018	H3018	453
30 10 040 200	H4020	450
30 10 040 210	H4021	450
30 10 040 300	H4030	450
30 10 040 310	H4031	450
30 10 040 330	H4033	449
30 10 040 340	H4034	449
30 10 040 800	H4080	450
30 10 040 810	H4081	451
30 10 040 820	H4082	451
30 10 040 830	H4083	451
30 10 040 840	H4084	451
30 24 040 520	H4052	456
30 24 040 560	H4056	458
30 24 040 620	H4062	456
30 24 040 670	H4067	457
30 24 040 720	H4072	456
30 24 040 730	H4073	457
30 24 040 740	H4074	458
30 24 041 670	H4167	457
30 24 041 680	H4168	457
30 24 041 700	H4170	458
30 24 041 730	H4173	457
30 69 050 020	H5002	448
30 69 050 110	H5011	499
30 69 050 140	H5014	499
30 69 050 150	H5015	499
30 69 050 160	H5016	499
30 69 050 230	H5023	470
30 69 050 300	H5030	459
30 69 051 030	H5103	500
30 69 051 040	H5104	500
30 69 051 070	H5107	500
30 69 051 080	H5108	500
30 69 051 090	H5109	501
30 69 051 100	H5110	501
30 69 051 210	H5121	501
30 69 051 250	H5125	501
30 69 051 260	H5126	501
30 69 051 270	H5127	502
30 69 051 280	H5128	502
30 69 051 290	H5129	502
30 69 051 310	H5131	502
30 69 051 320	H5132	502
30 69 052 010	H5020	287
30 69 052 030	H5022	448
30 69 052 040	H5024	287
30 69 052 050	H5025	288
30 70 000 009	H7009	455
30 80 000 013	H8013	455
30 81 000 010	H8106	459
31 04 139 600	A1396	497
31 04 139 611	A1396.1	497
31 04 139 700	A1397	498
31 04 139 711	A1397.1	498
31 04 139 800	A1398	497
31 04 139 811	A1398.1	497
31 05 213 050	A6110	396
31 05 213 051	A6111	396
31 05 213 054	A6114	396
31 05 213 055	A6115	396
31 06 213 150	A6310	395
31 06 213 151	A6311	396
31 06 213 152	A6312	395
31 06 213 153	A6313	396
31 06 213 240	A6210	395
31 06 213 241	A6211	395
31 06 213 242	A6212	395
31 06 213 243	A6213	395
31 07 120 800	A1208	503
31 07 120 900	A1209	503
31 08 160 200	A1602	503
31 08 982 011	A9820.1	514
31 08 985 511	A9855.1	514
31 14 220 100	A2201	508
31 14 991 010	A9101	508
31 14 991 020	A9102	508
31 14 991 030	A9103	508
31 14 991 040	A9104	508
31 14 991 110	A9111	508
31 14 991 120	A9112	509
31 14 991 130	A9113	509
31 14 991 210	A9121	509
31 15 282 100	A2821	510
31 15 282 200	A2822	510
31 15 282 300	A2823	510
31 15 282 400	A2824	510
31 15 282 500	A2825	510
31 15 282 600	A2826	510
31 15 283 100	A2831	510
31 15 283 200	A2832	510
31 15 283 300	A2833	511
31 15 283 400	A2834	511
31 16 300 400	A3004	434
31 16 301 000	A3010	434
31 16 336 600	A3366	434
31 16 336 900	A3369	434
31 19 240 111	A2401.1	513
31 19 240 300	A2403	513
31 19 503 700	A5037	513
31 19 503 800	A5038	513
31 19 504 300	A5043	513
31 19 504 700	A5047	513
31 19 504 800	A5048	513
31 19 945 700	A9457	513
31 19 945 711	A9457.1	514
31 19 945 800	A9458	514
31 32 245 430	C2454.3	166
31 32 260 802	C2611.4	165
31 32 260 812	C2611.5	165
31 32 260 813	C2608.1	164
31 32 310 120	C3101.2	166
31 32 345 410	C3454.1	166
31 32 360 540	C3605.4	164
31 32 360 630	C3606.3	165
31 32 360 770	C3607.7	165
31 32 360 780	C3607.8	165
31 32 360 840	C3608.4	165
31 32 360 850	C3608.5	165
31 32 361 310	C3613.1	165
31 32 361 320	C3613.2	165
31 32 361 330	C3613.3	165
31 32 510 900	C5109	157
31 45 310 410	A2841	511
31 45 310 420	A2842	511
31 45 310 430	A2843	511
31 45 310 440	A2844	511
31 45 310 450	A2845	511
31 45 310 460	A2846	511
31 45 310 470	A2847	511
31 45 310 480	A2848	511
31 45 310 490	A2849	512
31 45 310 500	A2850	512
31 45 310 510	A2851	512
31 45 310 520	A2852	512
31 45 310 530	A2853	512
31 45 310 540	A2854	512
31 45 310 550	A2855	512
31 45 310 560	A2856	512
31 45 310 570	A2857	512
31 45 310 580	A2858	512
31 46 001 040	A4101	509
31 46 001 060	A4102	509
31 46 001 100	A4103	509
31 46 011 040	A4105	509
31 46 011 060	A4106	509
31 46 011 100	A4107	509
31 47 010 020	A5102	515
31 47 020 010	A5201	515
31 47 030 010	A5301	515
31 47 040 010	A5401	515
31 99 900 000	A9000	514
32 32 101 000	KT01F	324
32 32 102 000	KT02F	324
32 32 103 000	KT03F	324
32 32 201 000	KT01T	324
32 32 202 000	KT02T	325
32 32 203 000	KT03T	325
32 32 301 000	KT01C	325
32 32 302 000	KT02C	325
32 32 303 000	KT03C	325
32 33 012 120	KE1212	328
32 33 012 420	KE1242	328
32 33 012 820	KE1282	327
32 33 029 810	KE2981	327
32 33 049 100	KE4910	327
32 33 049 110	KE4911	327
32 33 049 120	KE4912	327
32 33 049 130	KE4913	326
32 33 049 140	KE4914	326
32 33 049 160	KE4916	326
32 33 049 220	KE4922	326
32 33 068 300	KE6821	328
34 01 000 010	P57001	469
34 01 000 020	P57002	469
34 01 570 000	P57000TR	469
34 01 570 001	P57000T	468
34 01 571 010	P57101	468
34 01 571 020	P57102	468
34 01 571 040	P57104	469
34 02 043 000	P5728	464
34 02 044 000	P5729	464
34 02 060 002	P5760T	466
34 02 060 011	P5760N	461
34 02 060 012	P5763N	462
34 02 063 002	P5763RN	462
34 02 107 000	P5723	465
34 02 108 000	P5723T	467
34 02 113 000	P5728T	467
34 02 114 000	P5729T	467
34 02 115 000	P5730	464
34 02 116 000	P5731	463
34 02 117 001	P5732T	467
34 02 118 000	P5750	461
34 02 118 001	P5750T	466
34 02 119 000	P5750.2T	461
34 02 120 000	P5750.2R	461
34 02 121 000	P5729B	464
34 02 122 000	P5733W	463
34 02 123 000	P5733S	463
34 02 124 000	P5733G	463
34 02 125 000	P5734	463
34 02 126 000	P5734B	462
34 02 126 001	P5734T	467
34 02 127 000	P5735WS	460
34 02 128 000	P5735SS	460
34 02 129 000	P57103	465
34 02 129 000	P57103	469
34 02 130 000	P5736	462
34 02 131 000	P5737	462
34 02 132 000	P5727N	464
34 02 133 000	P57U01	465
34 02 134 000	P5739W	465
34 02 135 000	P5739B	465
34 02 136 000	P57P01	466
34 02 137 000	P57P02	466
34 02 138 000	P5739T	468
90 23 009 850	A0207	505
90 23 009 920	A0209	505
90 23 010 250	A0214	505
90 23 010 320	A0216	505
90 23 010 650	A0221	505
90 23 010 710	A0223	505
90 23 011 250	A0227	504
90 23 011 950	A0232	504
90 23 014 550	A0242	504
90 23 014 620	A0243	504
90 23 015 150	A0250	504
90 23 015 220	A0252	504
90 23 016 800	A0260	505
90 23 017 100	A0264	505
90 23 017 500	A0267	506
90 23 017 800	A0268	506
90 23 018 200	A0271	506
90 23 019 000	A0273	506
90 23 019 900	A0279	506
90 23 020 101	A0282	506

3 STEPS to find your specific battery

STEP 1

Use magnifying card to look for brand / model number.



STEP 2

Match number on chart with GP model number

Button cells

1 Brand

GP	Duracell
CR2032	2032
CR2430	DL2430
CR2450	DL2450

3 GP model no.

2 Model no.

STEP 3

Look for model number on GP packaging.



GP model no. on pack

Button cells



GP	IEC	Energizer	Duracell	Panasonic	Varta
CR1/3N	CR1/3N	2L76	DL1/3N	-	CR1/3N
CR1216	CR1216	1216	DL1216	CR1216	CR1216
CR1220	CR1220	1220	DL1220	CR1220	CR1220
CR1616	CR1616	1616	DL1616	CR1616	CR1616
CR1620	CR1620	1620	DL1620	CR1620	CR1620
CR1632	CR1632	1632	-	CR1632	CR1632
CR2016	CR2016	2016	DL2016	CR2016	CR2016
CR2025	CR2025	2025	DL2025	CR2025	CR2025
CR2032	CR2032	2032	DL2032	CR2032	CR2032
CR2430	CR2430	2430	DL2430	CR2430	CR2430
CR2450	CR2450	2450	DL2450	CR2450	CR2450
A76	LR44	A76	LR44	LR44	V13GA
164	LR60	-	-	-	-
177	LR626	-	-	-	-
186	LR43	LR43	LR43	LR43	V12GA
189	LR54	LR54	LR54	LR1130	V10GA
191	LR55	-	-	LR1120	V8GA
192	LR41	-	-	LR41	V3GA
PX625A	LR9	EPX625G	625A	-	V625U

Miniature batteries



GP	IEC	Energizer	Duracell	Panasonic	Varta
CR123A	CR17345	123	123	CR123A	CR123A
CR2	-	CR2	CR2	CR2	CR2
CR-P2	CR-P2	223	223	CRP2	CR-P2
2CR5	2CR5	2CR5	2CR5	2CR5	2CR5
25A	LR8D425	AAAA	AAAA	-	AAAA
910A	LR1	LR1	N	LR1	N
10A	-	-	-	-	-
11A	-	-	E11A	-	V11A
23A	-	A23	MN21	LRV08	V23GA
26A	-	-	-	-	-
27A	-	A27	MN27	-	V27A
29A	-	-	-	-	-
476A	4LR44	A544	4LR44	-	V4034

Hearing Aid



GP	IEC	Energizer	Duracell	Panasonic	Varta
ZA10	PR536	10	10	PR536	V230A
ZA13	PR48	13	13	PR48	V13A
ZA312	PR41	312	312	PR41	V675A
ZA675	PR44	675	675	PR44	V312A

Lead-acid accumulators



Lead-acid accumulators – 5-year optimal service life	Order code	B9641	B9651	B9659	B9682	B9652	B9672	B9653	B9679	B9691
	Parameters	6 V/4 Ah	6 V/1.3 Ah	6 V/7 Ah	6 V/12 Ah	12 V/1.3 Ah	12 V/2.2 Ah	12 V/4.5 Ah	12 V/5 Ah	12 V/7.0 Ah
	Terminal	4.7 mm	4.7 mm	4.7 mm	4.7 mm	4.7 mm	4.7 mm	4.7 mm	6.3 mm	4.7 mm
	Electronic security systems	–	yes	yes	yes	yes	yes	yes	yes	yes
	Electronic fire alarm systems	–	yes	yes	yes	yes	–	yes	yes	yes
	UPS	–	–	yes	yes	–	–	yes	yes	yes
	Emergency lighting	yes	–	–	–	–	–	–	–	yes
	Elevators – power for emergency calls and lighting	–	–	–	–	yes		yes	yes	yes
Jablotron control panels	JA82Y	–	–	–	–	–	yes	–	–	–
	JA100K(R)	–	–	–	–	–	yes	–	–	–
	JA83	–	–	–	–	–	–	–	–	yes
	JA106K	–	–	–	–	–	–	–	–	yes
PARADOX	90 % use	–	–	–	–	–	–	–	–	yes
	10 % use	–	–	–	–	–	–	–	–	–



Lead-acid accumulators – 5-year optimal service life	Order code	B9654	B9674	B9675	B9656V	B9656	B9655	B9683	B9684	B9685
	Parameters	12 V/7.2 Ah	12 V/7.2 Ah	12 V/9 Ah	12 V/15 Ah	12 V/12 Ah	12 V/18 Ah	12 V/26 Ah	12 V/40 Ah	12 V/65 Ah
	Terminal	4.7 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	12 × 12 × 2 mm	14 × 12 × 2 mm	M6	M8
	Electronic security systems	yes	yes	–	–	yes	yes	–	–	–
	Electronic fire alarm systems	yes	–	–	–	yes	yes	–	–	–
	UPS	yes	yes	yes	–	yes	yes	yes	yes	yes
	Emergency lighting	yes	–	–	–	–	yes	yes	yes	yes
	Elevators – power for emergency calls and lighting	yes	–	–	–	yes	yes	–	–	–
Jablotron control panels	JA82Y	–	–	–	–	–	–	–	–	–
	JA100K(R)	yes	–	–	–	–	–	–	–	–
	JA83	yes	–	–	–	–	yes	–	–	–
	JA106K	yes	–	–	–	–	yes	–	–	–
PARADOX	90 % use	yes	–	–	–	–	–	–	–	–
	10 % use	–	–	–	–	–	yes	–	–	–

Battery chargers







Order code	B56499	B50460D	B50829	B50439	B50434
Model number	S491	P461	E821	B423	B423
Series	Charge 10	Pro	Economy		
Charger connection	separated AC cord	USB	USB	USB-C	USB-C
Power supply	100–240 V AC	USB 5 V/2 A	USB 5 V/1 A	USB 5 V/1 A	USB 5 V/1 A
Size of the charged cells	AAA, AA	AAA, AA	AAA, AA	AAA, AA	AAA, AA
Special features	Eco mode	capacity check, docking station	–	PD charging compatible	PD charging compatible
Number of cells inside the package	4	4	8	4	4
Type of cells inside the package	AA Recyko Charge 10	AA ReCyko Pro	AA ReCyko 2 100, AAA ReCyko 850	AA Recharge 2100, AAA Recharge 800	AA ReCyko 2 100
Charging time of the enclosed cells	0:10	1:20 - 2:40	9:00	4:00	6:00
Number of charging channels	4	4	4	4	4
Number of batteries charged	1 to 4	1 up to 4	2, 4, 6 or 8	1 to 4	1 to 4
Charging current for AA	10 000 mA	1 730 mA/870 mA	250 mA	1 400 mA/400 mA × 4	1 400 mA/400 mA × 4
Charging current for AAA	1 500 mA	700 mA/350 mA	250 mA	1 400 mA/400 mA × 4	1 400 mA/400 mA × 4
Charging current for C	–	–	–	–	–
Charging current for D	–	–	–	–	–
Charging current for 9 V	–	–	–	–	–
Charging time AA 2 700 mAh	0:30	1:45/3:30	10:00	7:30	7:30
Charging time AAA 1 000 mAh	0:45	1:30 - 3:15	5:00	3:30	3:30








Order code	B50444D	B50224	B50457	B53457P	B534530	B50630
Model number	B441	E221	M452	M451	M453	B631
Series		Economy	Speed	Speed	Speed	
Charger connection	USB	USB	USB	USB	USB-C	USB
Power supply	USB 5 V/1 A	USB 5 V/1 A	USB 5 V/1 A	USB 5 V/1 A	USB 5 V/2 A	USB 5 V/2 A
Size of the charged cells	AAA, AA	AAA, AA	AAA, AA	AAA, AA	AAA, AA	AAA, AA, C, D, 9 V
Special features	–	–	–	capacity check, docking station	PD charging compatible, Flexi Charging (individual channels)	–
Number of cells inside the package	4	2	4	4	–	–
Type of cells inside the package	AA ReCyko 2 100	AA ReCyko 2 100	AA ReCyko Pro	AA ReCyko 2 600	–	–
Charging time of the enclosed cells	3:00/6:00	8:00	2:45 - 5:30	5:30	–	–
Number of charging channels	2	1	4	4	4	4
Number of batteries charged	2 or 4	2	1 až 4	1 to 4	1 to 4	2 or 4
Charging current for AA	770 mA/380 mA	300 mA	1 100–550 mA	1 100–550 mA	1200 mA (4 x AA)	370 mA
Charging current for AAA	300 mA	300 mA	730–370 mA	730–370 mA	800 mA (4x AAA)	290 mA
Charging current for C	–	–	–	–	–	550 mA
Charging current for D	–	–	–	–	–	550 mA
Charging current for 9 V	–	–	–	–	–	40–20 mA
Charging time AA 2 700 mAh	4:00 - 8:00	10:00	2:45 - 5:30	5:30	2:45	8:00
Charging time AAA 1 000 mAh	2:30 - 3:30	4:00	1:30 - 3:30	4:15	1:30	4:00

Battery chargers







Order code	N9221	N9321	N9361
Type	BCL-20D	BCN-40	BCN-60U
Type of rechargeable cells	Li-ion, LiFePo4, NiMH	NiMH	NiMH
Power supply	5 V/2 A	5 V/1 A	5 V/2 A
Size of the charged cells	10440 – 26650, AAA, AA, C, SC	AAA, AA	AAA, AA, C, D, 9 V
Special features	capacity measurement, recovery modes, lithium battery charging	–	–
LCD display	yes	–	–
Type of cells inside the package	–	–	–
Charging time of the individual cells	–	–	–
Number of charging channels	2	4	7
Number of batteries charged	1 and 2	1 to 4	1 to 6
Charging current for AA	1 000 mA	300 mA	500 mA
Charging current for AAA	1 000 mA	300 mA	500 mA
Charging current for C	1 000 mA	–	500 mA
Charging current for D	–	–	500 mA
Charging current for 9 V	–	–	30 mA
Charging time AA 2 700 mAh	3:00	10:00	6:30
Charging time AAA 1 000 mAh	1:15	4:00	2:30

Headlamps








Order code	P8569	P8555	P8567	P8566	P8572	P8571
Type	PHR19	CHR35	PHR17	PHR16	CHR41	CH46
Usage	OUTDOOR	OUTDOOR	SPORT	SPORT	OUTDOOR/SPORT	OUTDOOR/SPORT
Source of light	2× Osram SMD LED	CREE SMD LED	3× CREE SMD LED	2× CREE SMD LED	CREE SMD LED	CREE SMD LED
Max. light output	1 200 lm	600 lm	500 lm	300 lm	300 lm	300 lm
Max. beam distance	110 m	130 m	85 m	50 m	157 m	157 m
Number of lighting modes	11	5	10	9	4	4
Lighting modes	Turbo; Spot: 5 %; 20 %; 60 %;100 %, Flood:2,5 %; 10 %;60 %; 100 %; SOS, Red LED light	Turbo, 100 %, 20 %, 5 %, red LED flashing	Turbo, 2,5 %,30 %, 100 %, SOS, Red LED light, Flood, red: 50 %, 100 %, flashing	Turbo, 3 %,25 %, 100 %, SOS, Red LED light, red: 50 %, 100 %, flashing	AUTO, 100 %,50 %, 2 %,flicker	100 %, 50 %,2 %, flicker
Max. luminious time	100 h	60 h	100 h	45 h	69 h	69 h
Rechargeable	yes	yes	yes	yes	yes	–
Power supply	Li-ion (2 550 mAh) / 2× CR123A	Li-ion (2 550 mAh)	Li-Po (1 600 mAh)	Li-Po (800 mAh)	3× AAA (HR03)	3× AAA
Waterproof	IPX8	IPX4	IPX6	IPX6	IPX6	IPX6
Special features	button lock mode	button lock mode	button lock mode	button lock mode	button lock mode, automatic dimming	touchless dimming
Dimensions	91,5 × 39 × 51 mm	106 × 27 × 27 mm	56 × 38 × 39 mm	56 × 38 × 34 mm	34 × 46 × 56 mm	34 × 46 × 56 mm
Weight	90/151 g	153 g	59,5 g	44 g	110 g	110 g







Order code	P8574	P8573	P8584	P8583	P8582
Type	CHW54	CHW53	CH44	CH43	CH42
Usage	WORK	WORK	OUTDOOR	OUTDOOR/SPORT	MULTIUSE
Source of light	2× CREE SMD LED	2× CREE SMD LED	2× SMD LED	2× SMD LED + LED	2× SMD LED
Max. light output	375 lm	280 lm	300 lm	150 lm	110 lm
Max. beam distance	110 m	90 m	60 m	45 m	40 m
Number of lighting modes	4	6	6	5	4
Lighting modes	Turbo; 100 %, 30 %, 17 %	Turbo; 100 %,40 %, 25 %, red LED light, flashing	100 %, 60 %,25 %, 12 %, red LED light, flashing	100 %, 45 %,25 %, red LED light, flashing	100 %, 65 %, 40 %, flicker
Max. luminious time	26 h	25 h	36 h	36 h	15 h
Rechargeable	–	–	–	–	–
Power supply	3× AAA	3× AAA	3× AAA	3× AAA	3× AAA
Waterproof	IPX5	IPX5	IPX4	IPX4	IP43
Special features	touchless dimming	–	touchless light swithing	–	–
Dimensions	66 × 49 × 37 mm	66 × 49 × 37 mm	61 × 47 × 37 mm	61 × 47 × 37 mm	59 × 46 × 34 mm
Weight	62 g/98 g	95 g	42 g/78 g	42 g/78 g	29 g/65 g

EMOS Headlamps








Order code	P3521	P3537	P3528	P3536	P3539	P3531
Source of light	LED + 2× red LED	COB LED	COB LED	LED + COB LED (green, red)	CREE LED + 2× red LED	CREE LED + COB LED (green, red) + red LED (rear light)
Maximal light output	85 lm	110 lm	150 lm	220 lm	330 lm	330 lm
Maximal beam distance	65 m	15 m	20 m	100 m	200 m	65 m
Number of lighting modes	4	3	3	7	5	7
Lighting modes	LED 100 %, LED 50 %, red LED flashing, red LED blinking	COB LED 100 %, COB LED 50 %, blinking	COB LED 100 %, COB LED 50 %, SOS	COB LED + LED 100 %, LED 100 %, LED 50 %, blinking, COB LED – white, COB LED – red, COB LED – green	CREE LED 100 %, CREE LED 50 %, SOS, red LED flashing, red LED blinking	COB LED + CREE, LED 100 %, CREE LED 100 %, CREE LED 50 %, CREE LED – blinking, COB LED – white, COB LED – green, COB LED – red
Runtime	50–120 hrs	20–40 hrs	8–27 hrs	45–160 hrs	50–87 hrs	18–72 hrs
Waterproof	IP43	–	–	IP43	IP43	IP44
Rechargeable	–	–	–	–	–	–
Power supply	3× AAA	3× AAA	3× AAA	3× AAA	3× AAA	3× AAA + 1× CR2032
Special features	quick switch ON/OFF	–	–	quick switch ON/OFF	quick switch ON/OFF, focus	quick switch ON/OFF
Dimensions	58 × 38 × 44 mm	60 × 18 × 40 mm	60 × 40 × 40 mm	65 × 45 × 50 mm	60 × 48 × 43 mm	65 × 32 × 39 mm
Weight	54 g/89 g	21 g/56 g	53 g/88 g	65 g/100 g	70 g/105 g	80 g/115 g









Order code	P3543	P3545	P3534	P3541	P3542	P3544	P3546
Source of light	LED	3× LED	CREE LED	COB LED + LED	COB LED + LED	LED	7× LED
Maximal light output	80 lm	175 lm	230 lm	380 lm	500 lm	500 lm	550 lm
Maximal beam distance	7 m	50 m	80 m	30 m	130 m	120 m	110 m
Number of lighting modes	6	5	4	4	7	2	7
Lighting modes	LED 50%, LED 100%, red, green, blue, multicolor	LED 100 %, LED 100 %, LED+LED 100 %, Red LED, Red LED blinking	CREE LED 100 %, CREE LED 50 %, CREE LED 20 %, SOS	COB LED 100 %, COB LED 50 %, LED 100 %, LED 50 %	LED 25 %, LED 50 %, LED 100 %, COB LED 25 %, COB LED 50 %, COB LED 100 %, LED + COB LED	LED 100 %, LED 50%	LED CW 100 %, LED CW 50 %, LED CW 20 %, LED RED on, LED WW, LED NW, LED RED flashing
Runtime	5–10 hrs	2–4,5 hrs	3–13 hrs	3–12 hrs	4–6.5 hrs	1–4 hrs	3,5–9 hrs
Waterproof	–	IP43	–	IP43	IP44	–	IP45
Rechargeable	yes	yes	yes	yes	yes	yes	yes
Power supply	Li-pol (500 mAh)	Li-pol (800 mAh)	Li-pol (1 200 mAh)	Li-pol (1 200 mAh)	Li-pol (1 200 mAh)	Li-Ion (800 mAh)	Li-pol (1 000 mAh) / 3xAAA
Special features	quick switch ON/OFF	hand motion control, quick switch OFF, battery protection	hand-operated switching, quick switch ON/OFF, battery protection	hand-operated switching, quick switch ON/OFF, battery protection	hand-operated switching, quick switch ON/OFF, battery protection	battery protection	quick switch ON/OFF, battery protection
Dimensions	50 × 60 × 37 mm	52 × 29 × 35 mm	61 × 37 × 31 mm	300 × 3.2 × 20 mm	70 × 45 × 35 mm	80 × 29 × 30 mm	64 × 48 × 32 mm
Weight	55 g	56 g	60 g	73 g	90 g	60 g	77 g

LED work lights



Order code	P4537	P4531	P4546	P4535	P4538	P4540	P4544	P4545
Type	RECHARGEABLE							
Source of light	COB LED + SMD LED	COB LED + LED	COB LED + LED	2× COB LED + LED	SMD LED + LED	COB LED + LED	COB LED + SMD LED	COB LED
Maximal light output	330 lm	400 lm	500 lm	670 lm	700 lm	750 lm	800 lm	1 000 lm
Maximal beam distance	45 m	40 m	30 m	40 m	45 m	35 m	110 m	40 m
Number of lighting modes	3	3	3	3	3	6	3	2
Lighting modes	COB LED 100 %, COB LED 33 %, SMD LED 100 %	COB LED 100 %, COB LED 50 %, LED 100 %	COB LED 100 %, COB LED 40 %, LED	1× COB LED 100 %, 2× COB LED 100 %, LED 100 %	SMD LED BOOST, SMD LED 100 %, LED 100 %	COB LED 100 %, COB LED 40 %, COB LED 20 %, red COB LED glow, red COB LED flashing, LED 100 %	COB LED 100 %, COB LED 50 %, SMD LED 100 %	COB LED 100 %, COB LED 40 %
Runtime	3–7 hrs	3–8.5 hrs	2,5–6 hrs	2–10 hrs	3–6 hrs	2–13 hrs	2,5–7 h	2–6 hrs
Focus	–	–	–	–	–	–	–	–
Shock-resistance	yes	yes	yes	–	–	yes	yes	yes
Waterproof	yes (IP43)	yes (IP43)	yes (IP54)	–	–	yes (IP44)	yes (IP54)	yes (IP43)
Rechargeable	yes	yes	yes	yes	yes	yes	yes	yes
Power supply	Li-Ion	Li-Ion	Li-Ion	Li-Ion	Li-Ion	Li-Ion	Li-Ion	Li-Ion
Battery type	1 200 mAh/3.7 V	2 000 mAh/3.7 V	2 000 mAh/3.7 V	2 200 mAh/3.7 V	1 200 mAh/3.7 V	1 800 mAh/3.7 V	2 000 mAh/3.7 V	2 600 mAh/7,4 V
Batteries included	yes	yes	yes	yes	yes	yes	yes	yes
Charging time	2–4 hrs	3 hrs	3 hrs	3 hrs	2 hrs	2.5 hrs	3 hrs	5 hrs
Power connector type	micro USB-B	micro USB-B	USB-C	USB-C	USB-C	USB-C	USB-C	USB-C
Led indication of the charging process	yes	yes	yes	yes	yes	yes	yes	yes
Led indication of the accumulator state	yes	yes	yes	yes	yes	–	yes	yes
Special features	quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection	quick switch ON/OFF,battery protection	powerbank function, quick switch ON/OFF, battery protection	battery protection function, light BOOST function	quick switch ON/OFF, battery protection	quick switch off function, battery protection function, powerbank function	quick switch ON/OFF, battery protection
Facilities	swivel handle, 1× clip, 1× magnet, 1× hook	swivel handle, clip, 1× hook, 1× magnet	swivel handle, 1× hook, 1× magnet	1× hook, 4× magnet	2× magnet	rotating reflector, magnet, hook	swivel handle, 2× hook, 2× magnet	2× swivel handle, 2× hook, 4× magnet
Accessories	USB cable	USB cable	USB cable	USB cable	USB cable	USB cable	USB cable	USB cable
Material	ABS plastic + rubber	plastic + rubber	plastic	ABS + TPR + rubber	ABS plastic + rubber	plastic	plastic + rubbered	ABS plastic
Dimensions	41 × 29 × 154 mm	52 × 32 × 165 mm	48 × 30 × 207 mm	35 × 33 × 257 mm	37 × 14 × 240 mm	28 × 35 × 147/ 285 mm	50 × 50 × 255 mm	50 × 46 × 500 mm

LED work lights



Order code	P4534	P4542	P4533	P4543	P4536	P3888	P4112	P4113
Type	RECHARGEABLE					BATTERY		
Source of light	COB LED	COB LED cool + COB LED warm	COB LED	COB LED	2× COB LED	COB LED	2× COB LED + LED	COB LED
Maximal light output	600 lm	900 lm	1 000 lm	1 200 lm	2 000 lm	180 lm	350 lm	700 lm
Maximal beam distance	35 m	35 m	45 m	60 m	70 m	45 m	110 m	35 m
Number of lighting modes	2	16	3	3	5	2	2	3
Lighting modes	COB LED 100 %, COB LED 50 %	4× COB LED 100 %, 75 %, 50 %, 25 % (warm/neutral/cool)	COB LED 100 %, COB LED 50 %, COB LED 20 %	COB LED 100 %, COB LED 30 %, flashing	2× COB LED 100 %, 2× COB LED 50 %, 1× COB LED 100 %, 1× COB LED 50 %, 1× COB LED 25 %	COB LED 100 %, COB LED 50 %	2× COB LED 100 %, LED 100 %	COB LED 35 %, COB LED 60 %, COB 100 %
Runtime	2.5–3.5 hrs	3,5–12,5 hrs	3.5–15.5 hrs	3,5–6,5 hrs	3.5–14.5 hrs	16–24 hrs	10–20 hrs	8–14 hrs
Focus	–	–	–	–	–	–	–	–
Shock-resistance	yes	yes	yes	yes	yes	yes	–	yes
Waterproof	yes (IP44)	–	yes (IP44)	yes (IP44)	–	–	–	yes (IP43)
Rechargeable	yes	yes	yes	yes	yes	–	–	–
Power supply	Li-Ion	Li-Ion	Li-Ion	Li-pol	Li-Ion	3× AAA	3× AA	4× AA
Battery type	3 000 mAh/3.7 V	2× 2 000 mAh/3.7 V	4 400 mAh/3.7 V	2 000 mAh/3.7 V	8 000 mAh/3.7 V	LR03 (1.5 V)	LR6 (1,5 V)	LR6 (1,5 V)
Batteries included	yes	yes	yes	yes	yes	–	–	–
Charging time	3.5 hrs	4.5 hrs	7.5 hrs	3 hrs	7 hrs	–	–	–
Power connector type	micro USB-B	USB-C	micro USB-B	USB-C	USB-C	–	–	–
Led indication of the charging process	yes	yes	yes	yes	yes	–	–	–
Led indication of the accumulator state	yes	yes	yes	yes	yes	–	–	–
Special features	battery protection, powerbank function	battery protection, powerbank	quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection	–	–	quick switch ON/OFF
Facilities	swivel handle	magnet, rotating stand, hook	swivel handle	magnet, rotating stand, clip	swivel handle, 4× magnet	break-over handle, 1× hook, 2× magnet	swivel handle	swivel handle
Accessories	USB cable	USB cable	USB cable	USB cable	USB cable	–	–	–
Material	Nylon + TPR	plastic	ABS plastic + rubber	plastic	ABS plastic + rubber	ABS plastic	plastic	plastic
Dimensions	172 × 45 × 126 mm	125 × 45 × 95 mm	172 × 45 × 126 mm	80 × 45 × 80 mm	214 × 140 (280) × 56 mm	59 × 30 × 133 mm	135 × 100 × 40 mm	145 ×105 × 35 mm

Door Videophones and Video Doorbells



Order code	H4020	H4040	H4101	H3010	H2060	H2017	H2050
Series	GoSmart	GoSmart	GoSmart	ADVANCED	ADVANCED	BASIC	
Type	IP-750A	IP-800	IP-410W	EM-10AHD	EM-04Z	EM-07HD	EM-03M 2WIRE
LCD size	7“	7"	7"	7''	7"	7''	7''
LCD resolution	Full HD 1080p	Full HD 1080p	Full HD 1080p	1080p	Full HD 1080p	720p	480p
Button design	without buttons, touchscreen	touch screen without buttons	touch screen without buttons, touch screen	touchscreen	with mechanical buttons	mechanical	mechanical
Number of conductors	4	2	–	4	2	4	2
Power supply	12 V DC	24 V DC	12 V DC	12 V DC	230 V/50 Hz	12 V DC	15 V DC
Memory	yes	yes	yes	yes	–	–	–
Network features	yes	yes	yes	–	–	–	–
Lock / gate control	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes
Number of inputs	2× camera unit, 2× CCTV	2× camera unit / 1× camera unit and intercom	wireless RF communication	2× camera unit, 2× CCTV	1× camera unit	2× camera unit, 2× CCTV	1× camera unit
Monitor dimensions	175 × 118 × 25 mm	175 × 120 × 21 mm	130 × 180 × 23 mm	175 × 125 × 20 mm	125 × 185 × 25 mm	233 × 23 × 160 mm	152 × 215 × 18 mm
Camera unit dimensions	142 × 44 × 21 mm	83 × 183 × 40 mm	46 × 180 × 70 mm	135 × 50 × 25 mm	150 × 60 × 40 mm	64 × 46 × 145 mm	141 × 63 × 40 mm
View angle	120/160°	110°	120°	120/160°	120°	80°	80°
Type of illumination	IR + IR CUT	IR + IR CUT	IR + IR CUT	IR + IR CUT	IR + IR CUT	IR	IR
Water-resistant camera unit	yes	yes	yes	yes	yes	yes	yes
Shock-resistant camera unit	yes	yes	yes	yes	yes	yes	yes
Intercom	yes	yes	–	yes	–	yes	–
Motion detection	yes	yes	yes	yes	–	–	–



Order code	H4030	H4031	H4032	H4035
Series	GoSmart			
Type	IP-09D	IP-09C	IP-15S	IP-10W
Camera resolution	1 920 × 1 080	1 920 × 1 080	1 920 × 1 080	Full HD 1080p
Number of buttons	1	1	1	1
Power supply	Li-Ion battery 2× 18650	12 V DC	5 V DC/1 A, AC 12–24 V	5 V DC/AC 16–24 V
Network features/WiFi	yes	yes	yes	yes
Lock/gate control	yes/–	yes/–	–/–	–/–
Camera unit dimensions	149 × 63 × 46 mm	149 × 63 × 46 mm	145 × 57 × 41 mm	115 × 45 × 21 mm
Camera viewing angle	110°	110°	130°	100°
Type of illumination	IR + IR CUT	IR + IR CUT	IR	IR + IR CUT
Water-resistant camera unit	yes	yes	yes	yes
Shock-resistant camera unit	–	–	–	–
Motion detection	yes	yes	yes	yes
Additional indoor bell	yes	yes	yes	yes

EMOS Weather stations

					
Order code	**E8010**	**E6016**	**E5111**	**E6018**	**E8614**
Version	wireless	wireless	wireless	wireless	wireless
Clock	DCF (radio controlled clock)	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal	DCF (radio controlled clock)
Display backlight	yes	yes	yes	yes	yes
Wall-mounted	–	yes	yes	yes	yes
Electronic panel backlight	yes	yes	yes	yes	yes
Time zones	yes	yes	yes	yes	yes
Projection	–	–	–	–	–
Date	yes	yes	yes	yes	yes
Calendar	yes	yes	yes	yes	yes
Alarm clock	yes	yes, 2×	yes, 2×	yes, 2×	yes, 2×
Outside temperature	-50 °C up to +70 °C, to 0,1 °C	-30 °C up +60 °C, to 0,1 °C	-40 °C up +70 °C, to 0,1 °C	-50 °C up +70 °C, to 0,1 °C	-40 °C to +70 °C, to 0.1 °C
Inside temperature	-2 °C up to +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C to +50 °C, to 0.1 °C
Outside humidity	20 % up to 95 % RV, to 1 %	1 % up 99 % RV, to 1 %	20 % up 95 % RV, to 1 %	1 % up 99 % RV, to 1 %	20 % to 95 % RH, to 1 %
Inside humidity	20 % up to 95 % RV, to 1 %	1 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %	20 % to 95 % RH, to 1 %
Minimum and maximum temperature	yes	yes	yes	yes	yes
Weather forecast	yes	yes	yes	yes	yes
Temperature warning	yes	yes	–	yes	–
Temperature/pressure trend	yes/yes	yes/yes	yes/yes	yes/yes	–/yes
Barometer/precipitation gauge/anemometer	yes/–/–	yes/yes/yes	yes/–/–	yes/–/–	yes/–/–
Altitude correction	–	yes	–	yes	–
Phases of the moon	yes	yes	yes	yes	–
Sensor range	up to 100 m	up 100 m	up 50 m	up 100 m	up to 80 m
Optional additional sensor	up to 3 sensors (E00387, E05018)	up to 3 temperature and humidity sensors (E06018), 1 anemometer sensor (E06016)	up to 3 sensors (E05018)	up to 3 sensors (E06018)	3 (E00387, E05018)
Wire probe for sensor	–	–	yes	–	–
Sensor's power supply	2× 1,5 V AAA (not included)	4× 1,5 V AA (not included)	2× 1,5 V AAA (not included)	2× 1,5 V AAA (not included)	2× 1.5 V AAA (not included)
Station's power supply	2× 1,5 V AA (not included)	3× 1,5 V AAA (not included)	3× 1,5 V AAA (not included)	3× 1,5 V AAA (not included)	3× 1.5 V AAA (not included)
Network adapter	yes, USB-C 9 V DC/2 000 mA, 1.5 m (included)	yes, 5 V DC/300 mA (included)	yes, 5 V DC/600 mA (included)	yes, 5 V DC/300 mA (included)	yes, 5 V DC/1 000 mA (included)
Dimension of the main unit	133 × 125 × 110 mm	17 × 192 × 127 mm	26 × 197 × 125 mm	17 × 192 × 127 mm	198 × 30 × 132 mm
Sensor's dimension	40 × 26 × 104 mm	250 × 160 × 100 mm	21 × 60 × 100 mm	15 × 62 × 100 mm	50 × 25 × 95 mm
Display size	110 × 73 mm	168 × 93 mm	164 × 90 mm	168 × 93 mm	169 × 93 mm

EMOS Weather stations











Order code	E6000	E6001	E8610	E8620	E8625	E8647N
Version	wireless – smart	wireless – smart	wireless – smart	wireless	wireless	wireless
Clock	wifi	wifi	wifi	DCF (radio controlled clock)	DCF (radio controlled clock)	yes, quartz
Display backlight	–	yes	yes	yes	yes	yes
Wall-mounted	–	yes	yes	–	yes	yes
Electronic panel backlight	–	yes	yes	yes	yes	yes
Time zones	–	–	–	yes	yes	–
Projection	–	–	–	–	–	–
Date	–	yes	yes	yes	yes	–
Calendar	–	yes	yes	yes	yes	–
Alarm clock	–	yes	yes	yes	yes	yes
Outside temperature	1. -40 °C to +70 °C, resolution 0.1 °C; 2. -40 °C to +70 °C, resolution 0,1 °C	-40 °C to +70 °C, resolution 0.1 °C	-40 °C to +70 °C, resolution 0.1 °C	-40 °C to +70 °C, to 0.1 °C	-40 °C to +70 °C, to 0.1 °C	-50 °C to +70 °C, to 0.1 °C
Inside temperature	–	-10 °C to +50 °C, resolution 0.1 °C	-10 °C to +50 °C, resolution 0.1 °C	0 °C to +50 °C, to 0.1 °C	0 °C to +50 °C, to 0.1 °C	-10 °C to +50 °C, to 0.1 °C
Outside humidity	1 % až 99 % RV, resolution 1 %	1 % až 99 % RV, resolution 1 %	20 % to 95 % RH, resolution 1 %	20 % to 99 % RH, to 1 %	20 % to 99 % RH, to 1 %	20 % to 95 % RH, to 1 %
Inside humidity	–	1 % to 99 % RH, resolution 1 %	20 % to 95 % RH, resolution 1 %	20 % to 99 % RH, to 1 %	20 % to 99 % RH, to 1 %	20 % to 95 % RH, to 1 %
Minimum and maximum temperature	–	yes	yes	yes	yes	yes
Weather forecast	yes – only in app	yes	yes	yes	yes	yes
Temperature warning	yes - only in the application	yes	yes	–	yes	–
Temperature/pressure trend	–/–	yes/–	yes/–	yes/–	yes/yes	–/–
Barometer/precipitation gauge/anemometer	–/yes/yes	yes/yes/yes	–/–/–	yes/–/–	yes/–/–	–/–/–
Altitude correction	–	–	–	–	–	–
Phases of the moon	–	yes	–	yes	yes	–
Sensor range	up to 100 m	up to 100 m	up to 80 m	up to 80 m	up to 80 m	up to 50 m
Optional additional sensor	3 (E06000)	–	3 (E00387, E05018)	3 (E00387, E05018)	3 (E05018)	–
Wire probe for sensor	–	–	–	–	–	–
Sensor's power supply	1. 3× 1.5 V AA (not included); 2. 2× 1,5 V AA (not included)	3× 1.5 V AA (not included)	2× 1.5 V AAA (not included)	2× 1.5 V AAA (not included)	2× 1.5 V AAA (not included)	2× 1.5 V AAA (not included)
Station's power supply	230 V AC	mains adapter	3× 1.5 V AAA (not included)	2× 1.5 V AAA (not included)	3× 1.5 V AAA (not included)	2× 1.5 V AAA (not included)
Network adapter	–	yes, 5 V DC/1 200 mA (not included	yes, 5 V DC/1 000 mA (included)	yes, 5 V DC/1 000 mA (included)	yes, 5 V DC/1 000 mA (included)	yes, USB-C 5 V/1 A (not included)
Dimension of the main unit	60 × 60 × 61 mm	189 × 21 × 119 mm	205 × 29 × 127 mm	155 × 50 × 113 mm	284 × 25 × 107 mm	20 × 85 × 96 mm
Sensor's dimension	1. 306 × 235 × 135 mm; 2. 50 × 33 × 95 mm	306 × 235 × 135 mm	50 × 25 × 95 mm	50 × 25 × 95 mm	50 × 25 × 95 mm	50 × 25 × 95 mm
Display size	–	155 × 86 mm	169 × 95 mm	127 × 85 mm	2× 125 × 80 mm	65 × 76 mm

Weather stations

				
Order code	**E8647W**	**E3070**	**E0352**	**E0531**
Version	wireless	wireless	wireless	wireless
Clock	yes, quartz	controlled by DCF signal	controlled by DCF signal	DCF (radio controlled clock)
Display backlight	yes	yes	–	–
Wall-mounted	yes	–	yes	yes
Electronic panel backlight	yes	–	–	–
Time zones	–	yes	yes	yes
Projection	–	–	–	–
Date	–	yes	yes	yes
Calendar	–	yes	yes	yes
Alarm clock	yes	yes	yes	yes
Outside temperature	-50 °C to +70 °C, to 0.1 °C	-30 °C up +60 °C, to 0,1 °C	-40 °C up +60 °C, to 0,1 °C	-40 °C to +70 °C, to 0.1 °C
Inside temperature	-10 °C to +50 °C, to 0.1 °C	0 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C to +50 °C, to 0.1 °C
Outside humidity	20 % to 95 % RH, to 1 %	–	20 % up 95 % RV, to 1 %	20 % to 95 % RH, to 1 %
Inside humidity	20 % to 95 % RH, to 1 %	20 % up 90 % RV, to 1 %	1 % up 99 % RV, to 1 %	20 % to 95 % RH, to 1 %
Minimum and maximum temperature	yes	–	yes	yes
Weather forecast	yes	yes	yes	yes
Temperature warning	–	–	–	yes
Temperature/pressure trend	–/–	yes/–	yes/–	yes/–
Barometer/precipitation gauge/anemometer	–/–/–	–/–/–	–/–/–	–/–/–
Altitude correction	–	–	–	–
Phases of the moon	–	yes	yes	yes
Sensor range	up to 50 m	up 30 m	up 30 m	up to 80 m
Optional additional sensor	–	up to 3 sensors (E03070)	up to 3 sensors (E05018)	3 (E00387, E05018)
Wire probe for sensor	–	–	–	–
Sensor's power supply	2× 1.5 V AAA (not included)	2× 1,5 V AAA (not included)	2× 1,5 V AA (not included)	2× 1.5 V AA (not included)
Station's power supply	2× 1.5 V AAA (not included)	3× 1,5 V AAA (not included)	2× 1,5 V AAA (not included)	3× 1.5 V AA (not included)
Network adapter	yes, USB-C 5 V/1 A (not included)	–	–	–
Dimension of the main unit	85 ×20 × 96 mm	52 × 139 × 100 mm	23 × 76 × 126 mm	215 × 18 × 113 mm
Sensor's dimension	50 × 25 × 95 mm	24 × 44 × 100 mm	21 × 38 × 100 mm	38 × 20 × 100 mm
Display size	65 × 76 mm	111 × 61 mm	50 × 81 mm	191 × 74 mm

Reels for outdoor use



Order code	P084504	P08440	P084254	P084503	P084253	P193250
Inclusion	NEOPRENE CABLE FOR MODERATE MECHANICAL LOAD, OIL-RESISTANT					
Warranty	**5 years**					
Conductor	H07RN-F3G					H07RN-F5G
Conductor diameter	1,5 mm²	2,5 mm²	1,5 mm²	2,5 mm²		1,5 mm²
Maximum reeled load	4,35 A max./1 000 W	5,2 A max./1 200 W	4,35 A max./1 000 W	5,2 A max./1 200 W	5,2 A max./1 200 W	230 V~: 4,35 A max./ 1 000 W; 400 V~: 6,25 A max./ 2 500 W
Maximum unreeled load	13 A max./3 000 W	16 A max./3 680 W	13 A max./3 000 W	16 A max./3 680 W	16 A max./3 680 W	230 V~: 13 A max./ 3 000 W; 400 V~: 12,5 A max./ 5 000 W
Length	50 m	40 m	25 m	50 m	25 m	25 m
Metal body	yes	yes	yes	–	–	–
Suitable for construction sites	yes	yes	yes	yes	yes	yes
Indoor use	yes	yes	yes	yes	yes	yes
Temperature range for cable use	from -25 °C to 60 °C					
Guide loop for easy cable reeling	yes	yes	yes	yes	yes	–
Outdoor use	yes | IP44					



Order code	P084505	P084255	P084256	P084501	P084251	P08420
Inclusion	RUBBER CABLE FOR STANDARD MECHANICAL STRESS					
Warranty	**3 years**					
Conductor	H05RR-F3G					
Conductor diameter	1,5 mm²		1,0 mm²	1,5 mm²		
Maximum reeled load	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W
Maximum unreeled load	13,04 A max./3 000 W	13,04 A max./3 000 W	10 A max./2 300 W	16 A max./3 680 W	16 A max./3 680 W	13,04 A max./3 000 W
Length	50 m	25 m	25 m	50 m	25 m	20 m
Metal body	yes	yes	–	–	–	–
Suitable for construction sites	–	–	–	–	–	–
Indoor use	yes	yes	yes	yes	yes	yes
Temperature range for cable use	from -25 °C to 60 °C					
Guide loop for easy cable reeling	yes	yes	yes	yes	yes	–
Outdoor use	yes | IP44					
LED light	–	–	–	–	–	20 W/1 600 lm

Reels for outdoor use





Order code	P08525W	P08550W	P08520W
Inclusion	SILICONE CABLE FOR MODERATE MECHANICAL LOADS, ANTI-FREEZE		
Warranty	**3 years**		
Conductor	AT-N05V3V3-F3G		
Conductor diameter	1,5 mm²		
Maximum reeled load	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W
Maximum unreeled load	16 A max./3 680 W	16 A max./3 680 W	13,04 A max./3 000 W
Length	25 m	50 m	20 m
Metal body	–		
Suitable for construction sites	yes		
Indoor use	yes		
Temperature range for cable use	from -35 °C to 60 °C		
Guide loop for easy cable reeling	yes	yes	–
Outdoor use	yes | IP44		
LED light	–	–	yes
Other functions	–	–	2x USB-A output

Reels for indoor use












Order code	P19450P	P19425P	P194504	P194253	P19450	P19425
Inclusion	PVC CABLE FOR STANDARD MECHANICAL STRESS					
Warranty	2 years					
Conductor	H05VV-F3G					
Conductor diameter	1,5 mm²					
Maximum reeled load	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W
Maximum unreeled load	13 A max./3 000 W	13 A max./3 000 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W
Length	50 m	25 m	50 m	25 m	50 m	25 m
Temperature range for cable use	from 4 °C to 60 °C					
Guide loop for easy cable reeling	yes					
Outdoor use	–					









Order code	P19430	P194252	P19420	P19410N	P194151	P19150	P19125
Inclusion	PVC CABLE FOR STANDARD MECHANICAL STRESS						
Warranty	2 years						
Conductor	H05VV-F3G						
Conductor diameter	1,0 mm²					1,5 mm²	
Maximum reeled load	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W
Maximum unreeled load	10 A max./2 300 W	10 A max./2 300 W	10 A max./2 300 W	10 A max./2 300 W	10 A max./2 300 W	16 A max./3 680 W	16 A max./3 680 W
Length	30 m	25 m	20 m	10 m	15 m	50 m	25 m
Temperature range for cable use	from 4 °C to 60 °C						
Guide loop for easy cable reeling	yes	yes	yes	–	yes	yes	yes
Outdoor use	–						

Reels for outdoor use



Order code	P19223	P19224	P19222	P08215	P19733	P192250
Inclusion	NEOPRENE CABLE FOR MODERATE MECHANICAL LOAD, OIL-RESISTANT					
Warranty	5 years					
Conductor	H07RN-F3G				H07RN-F5G	
Conductor diameter	1,5 mm²	2,5 mm²	1,5 mm²	1,5 mm²	2,5 mm²	1,5 mm²
Maximum reeled load	4,35 A max./1 000 W	5,2 A max./1 200 W	4,35 A max./1 000 W	4,35 A max./1 000 W	230 V~: 5,2 A max./ 1 200 W; 400 V~: 5,2 A max./ 3 600 W	230 V~: 4,35 A max./ 1 000 W; 400 V~: 6,25 A max./ 2 500 W
Maximum unreeled load	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	13,04 A max./3 000 W	230 V~: 13,04 A max./ 3 000 W; 400 V~: 13,04 A max./ 9 000 W	230 V~: 13 A max./ 3 000 W; 400 V~: 12,5 A max./ 5 000 W
Length	50 m	40 m	25 m	15 m	33 m	25 m
Metal body	yes	yes	yes	–	–	–
Suitable for construction sites	yes	yes	yes	yes	yes	yes
Indoor use	yes	yes	yes	yes	yes	yes
Temperature range for cable use	from -25°C to +60°C					
Guide loop for easy cable reeling	yes	yes	yes	–	–	–
Outdoor use	yes | IP44					
LED light	–	–	–	20 W/1 600 lm	–	–



Order code	P08250	P08225	P082251	P19625	P19221
Inclusion	RUBBER CABLE FOR STANDARD MECHANICAL STRESS				
Warranty	3 years				
Conductor	H05RR-F3G				
Conductor diameter	1,5 mm²		1,0 mm²	2,5 mm²	
Maximum reeled load	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	5,2 A max./1 200 W	5,2 A max./1 200 W
Maximum unreeled load	16 A max./3 680 W	16 A max./3 680 W	10 A max./2 300 W	16 A max./3 680 W	15,22 A max./3 500 W
Length	50 m	25 m	25 m	25 m	50 m
Metal body	–	–	–	–	–
Suitable for construction sites	–	–	–	–	–
Indoor use	yes	yes	yes	yes	yes
Temperature range for cable use	from -25°C to +60°C				
Guide loop for easy cable reeling	yes	yes	yes	yes	yes
Outdoor use	yes | IP44				
LED light	–	–	–	–	–

Reels for outdoor use





Order code	P08625W	P08650W	P08620W
Inclusion	SILICONE CABLE FOR MODERATE MECHANICAL LOADS, ANTI-FREEZE		
Warranty	**3 years**		
Conductor	AT-N05V3V3-F3G		
Conductor diameter	1,5 mm²		
Maximum reeled load	4.35 A max./1 000 W	4.35 A max./1 000 W	4,35 A max./1 000 W
Maximum unreeled load	16 A max./3 680 W	16 A max./3 680 W	13,04 A max./3 000 W
Length	25 m	50 m	20 m
Metal body	–		
Suitable for construction sites	yes		
Indoor use	yes		
Temperature range for cable use	from -35 °C to 60 °C		
Guide loop for easy cable reeling	yes	yes	–
Outdoor use	yes | IP44		
LED light	–	–	yes
Other functions	–	–	2x USB-A output

Reels for indoor use











Order code	P19427	P092501	P092251	P09250	P09225	P09240
Inclusion	PVC CABLE FOR STANDARD MECHANICAL STRESS					
Warranty	2 years					
Conductor	H05VV-F3G					
Conductor diameter	1,5 mm²					
Maximum reeled load	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W
Maximum unreeled load	13 A max./3 000 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W
Length	25 m	50 m	25 m	50 m	25 m	40 m
Temperature range for cable use	from 4 °C to 60 °C					
Guide loop for easy cable reeling	yes	yes	yes	yes	yes	yes
Outdoor use	–					







Order code	P09240M	P09225M	P09220	P19515	P19510
Inclusion	PVC CABLE FOR STANDARD MECHANICAL STRESS				
Warranty	2 years				
Conductor	H05VV-F 3 G				
Conductor diameter	2,5 mm²		1,0 mm²		
Maximum reeled load	5,2 A max./1 200 W	5,2 A max./1 200 W	4,35 A max./1 000 W	4,35 A max./1 000 W	4,35 A max./1 000 W
Maximum unreeled load	16 A max./3 600 W	16 A max./3 600 W	10 A max./2 300 W	10 A max./2 300 W	10 A max./2 300 W
Length	40 m	25 m	20 m	15 m	10 m
Temperature range for cable use	from 4 °C to 60 °C				
Guide loop for easy cable reeling	yes	yes	yes	yes	no
Outdoor use	–				

EMOS Data cables









Order code	S9222	S9129	S9221	S9121	S9225	S9143
Type	F/UTP CAT 5E	UTP CAT 5E	F/UTP CAT 5E	UTP CAT 5E	FTP CAT 5E	UTP CAT 5E
DESIGN PARAMETERS						
Twisted pair	4×	4×	4×	4×	4×	4×
Number of wires	4× 2 + 1	4× 2	4× 2 + 1	4× 2	4× 2	4× 2
Shielding	aluminium/PET foils	–	aluminium/PET foils	–	–	–
Foil	7/12 – 18 mm	–	7/12 – 18 mm	–	–	–
Internal conductor	copper wire	copper wire	copper wire	copper wire	copper (Cu)	copper (Cu)
AWG	24	24	24	24	24	24
Diameter of conductors (mm)	0,48	0,48	0,48	0,48	0.48 mm	0.48 mm
Shielding of conductors	HDPE	HDPE	HDPE	HDPE	HDPE	HDPE
Average thickness (mm)	0,22	0,22	0,22	0,22	0.22 mm	0.22 mm
Strength member	CuSn wire 0,4 mm	nylon 150D	CuSn wire 0,4 mm	nylon 150D	–	–
Cable jacket	LS0H (LSZH)	LS0H (LSZH)	PVC	PVC	PE	PE
Jacket thickness (mm)	1,1	1,1	1,1	1,1	1.1 mm	1.1 mm
Diameter of cable jacket (mm)	6	5,2	6	5,2	5–6 mm	5–6 mm
Colour	purple	purple	grey	grey	black (RAL 9005)	black (RAL 9005)
PACKAGING						
Material	 305 m, paper box 5-layer cardboard with print	 305 m, paper box 5-layer cardboard with print	 305 m, paper box 5-layer cardboard with print	 305 m, paper box 5-layer cardboard with print	 305 m, paper box 5-layer cardboard with print	 305 m, paper box 5-layer cardboard with print
MECHANICAL PROPERTIES						
Max. DC insulation resistance	94,8	94,8	94,8	94,8	94,8	94,8
Operating temperature	60	60	60	60	60	60
EU DIRECTIVE						
EU Directive 2011/65	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS
EU Directive 305/2011	CPR	CPR	CPR	CPR	CPR	CPR
MEETS HARMONISED STANDARDS						
	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | IEC 60754-2 | ČSN EN 50173-1 ed. 4:2019 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | ČSN EN 60754-1:2015 ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 / IEC/ČSN EN 61034-2	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017
CPR CERTIFICATION						
Euroclass fire rating	Dca-s2-d2-a2	Dca-s2-d2-a1	Eca	Eca	Eca	Eca
Hazardous substances	–	–	–	–	–	–

Data cables









Order code	S9137	S9136	S9135	S9223	S9141	S9224
Type	UTP CAT 5E	UTP CAT 5E	UTP CAT 5E	FTP CAT 5E	UTP CAT 5E	FTP CAT 5E
DESIGN PARAMETERS						
Twisted pair	4×	4×	4×	4×	4×	4×
Number of wires	4× 2	4× 2	4× 2	4× 2	4× 2	4× 2
Shielding	–	–	–	–	–	–
Foil	–	–	–	–	–	–
Internal conductor	copper clad Al (CCA)	copper (Cu)	copper (Cu)	copper (Cu)	copper (Cu)	copper (Cu)
AWG	24	24	24	24	24	24
Diameter of conductors (mm)	0.48 mm	0.45 mm	0.45 mm	0.48 mm	0.48 mm	0.48 mm
Shielding of conductors	HDPE	HDPE	HDPE	HDPE	HDPE	HDPE
Average thickness (mm)	0.21 mm	0.21 mm	0.21 mm	0.22 mm	0.22 mm	0.22 mm
Strength member	Nylon 150D	Nylon 150D	Nylon 150D	not stated	not stated	–
Cable jacket	PVC	PVC	PVC	PVC	PVC	PE
Jacket thickness (mm)	1.0 mm	1.0 mm	1.0 mm	1.0 mm	1.0 mm	1.0 mm
Diameter of cable jacket (mm)	5.0 mm	5.0 mm	5.0 mm	5 mm	5 mm	5 mm
Colour	grey (RAL 7035)	grey (RAL 7035)	grey (RAL 7035)	grey (RAL 7035)	grey (RAL 7035)	black (RAL 9005)
PACKAGING						
Material	 100 m, foil	 100 m, foil	 100 m, paper box 5-layer cardboard with print	 100 m, paper box 5-layer cardboard with print	 100 m, paper box 5-layer cardboard with print	 100 m, paper box 5-layer cardboard with print
MECHANICAL PROPERTIES						
Max. DC insulation resistance	94,8	94,8	94,8	94,8	94,8	94,8
Operating temperature	60	60	60	60	60	60
EU DIRECTIVE						
EU Directive 2011/65	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS
EU Directive 305/2011	CPR	CPR	CPR	CPR	CPR	CPR
MEETS HARMONISED STANDARDS						
	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017
CPR CERTIFICATION						
Euroclass fire rating	Eca	Eca	Eca	Eca	Eca	Eca
Hazardous substances	–	–	–	–	–	–

Data cables






Order code	S9142	S9310	S9320	S9131	S9132	S9231
Type	UTP CAT 5E	STP CAT6A	FFTP CAT6A	UTP CAT 6	UTP CAT 6	FTP CAT 6
DESIGN PARAMETERS						
Twisted pair	4×	4×	4×	4×	4×	4×
Number of wires	4× 2	4× 2 + 1	4× 2 + 1	4× 2	4× 2	4× 2
Shielding	–	aluminium/PET foils	aluminium/PET foils	–	–	–
Foil	–	7/12 – 18 mm	7/12 – 18 mm	–	–	–
Internal conductor	copper (Cu)	copper wire	copper wire	copper wire	copper wire	copper (Cu)
AWG	24	23	23	23	23	23
Diameter of conductors (mm)	0.48 mm	0,56	0,56	0,55	0,55	0.56 mm
Shielding of conductors	HDPE	HDPE	HDPE	HDPE	HDPE	HDPE
Average thickness (mm)	0.22 mm	0,22	0,22	0,22	0,22	0.21 mm
Strength member	–	nylon 150D	nylon 150D	nylon 150D	nylon 150D	nylon 150D
Cable jacket	PE	LSZH	LSZH	PVC	LSOH (LSZH)	PVC
Jacket thickness (mm)	1.0 mm	1,1	1,1	1,1	1,1	1.0 mm
Diameter of cable jacket (mm)	5 mm	7,6	7,6	6,3	6,3	6.0 mm
Colour	black (RAL 9005)	orange	grey	grey	purple	grey (RAL 7035)
PACKAGING						
Material	 100 m, paper box 5-layer cardboard with print	 500 m, wooden coil	 500 m, wooden coil	 305 m, paper box 5-layer cardboard with print	 305 m, paper box 5-layer cardboard with print	 305 m, paper box 5-layer cardboard with print
MECHANICAL PROPERTIES						
Max. DC insulation resistance	94,8	94,8	94,8	94,8	94,8	94,8
Operating temperature	60	-20 °C to 60 °C	-20 °C to 60 °C	60	60	60
EU DIRECTIVE						
EU Directive 2011/65	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS
EU Directive 305/2011	CPR	CPR	CPR	CPR	CPR	CPR
MEETS HARMONISED STANDARDS	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50575:2015 A1:2017	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2	ČSN EN 50173-1 ed. 4:2019 | IEC 61156-5 Ed. 2 | ISO/IEC 11801 CLASS | ČSN EN 50288-6-1 ed. 2:2014 | ANSI/EIA/TIA 568B.2-1 Cat 6 | ČSN EN 50575:2015 A1:2017	NSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | ČSN EN 50575:2015 A1:2017 | IEC/ČSN EN 60332-1-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2 | ČSN EN 50288-1 ed. 3:2014	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50575:2015 A1:2017
CPR CERTIFICATION						
Euroclass fire rating	Eca	B2ca–s1–d1–a1	Dca–s1–d2–a1	Eca	Dca-s2-d2-a2	Eca
Hazardous substances	–	–	–	–	–	–

Coaxial cables



Order code		S5131 | S5231S	S5141 | S5241S	S5252 | S5253	S5261 | S5262 | S5268	S5265 | S5266	S5269 | S5270	S5271 | S5273	S5272
Type of coaxial cable		CB 50F	CB 100F	CB 500	CB 113	CB 113 UV	CB 113 LSZH	CB 21D	CB 115
Type		75Ω						75Ω	
Class		–	–	–	CLASS A+	CLASS A+	CLASS A+	CLASS A	CLASS A
DESIGN PARAMETERS									
Internal conductor Ø [mm], mat.		0,9 Cu	1,0 Cu	0,75 Cu	1,13 Cu	1,13 Cu	1,13 Cu	1,10 Cu	1,02 Cu
Dielectric Ø [mm], type		4,4 FPE	4,6 FPE	3,2 FPE	4,8 FPE	4,8 FPE	4,8 FPE	4,8 FPE	4,8 FPE
Shielding	I.foil	1× Al	1× Al	1× Al/PES	1× Al/PES	1× Al/PES	1× Al/PES	1× Al/PET	1× Al/PET
	Conductors Ø [mm]	CuSn 32× 0,12	CuSn 48× 0,12	CuSn 48× 0,12	CuSn 144× 0,12	CuSn 144× 0,12	CuSn 144× 0,12	Al 128× 0,12	Al 96× 0,12
	II.foils	–	–	Al/PES spiral	Al/PES spiral	Al/PES spiral	Al/PES spiral	–	Al/PET
Jacket Ø [mm]		6,3±0,2	6,5±0,2	5±0,2	7,05±0,2	7,05±0,2	7,05±0,2	6,8±0,2	6,8±0,2
Material		PVC	PVC	PVC	PVC	PVC – UV resistant	LSZH	PVC	PVC
Colour		white	white	white	white	black	white	white	white
ELECTRICAL PARAMETERS									
Impedance [Ω]		75±3							
Capacity [pF/m]		56	54	53	52	52,5	52	52	50
Shortening coefficient		0,81	0,82	0,85	0,85	0,84	0,85	0,85	0,81
Maximum attenuation at 20 °C [dB/100 m]	10 MHz	2,2	2	4,5	2,2	2,28	2,2	2,2	2,17
	100 MHz	7	7	10,5	5,8	5,8	5,8	4,2	7,35
	450 MHz	14,3	14,1	20,2	12,5	12,6	12,5	11,3	13,2
	650 MHz	17,8	17,5	24,1	15,3	15,1	15,3	14,8	17,42
	860 MHz	20,8	20,5	28	18,5	17,87	18,5	17,6	19,47
	1 000 MHz	21,8	21	29,1	19,3	19,5	19,3	18,4	19,8
	2 000 MHz	32	31	>35	29,5	28,02	29,5	27,1	29,9
Maximum return loss at 20 °C [dB]	10–300 MHz	25	25	25	30	31	–	30	25
	300–600 MHz	23	23	20	25	25	25	25	23
	600–900 MHz	20	20	18	23	23	23	23	19
Min. shielding effectiveness [dB]	10–800 MHz	75	75	75	>95	>95	>95	>110	>100
Max. DC resistance at 20 °C [Ω/km]	Inner core	29,3	23,7	41,5	18,5	25,7	18,5	19,5	21
	Outer core	57,2	38,2	48,5	38,5	45,9	38,5	38,5	38
Insulation resistance between cores at 20 °C" [MΩ/km]		500	500	1 000	1 000	500	1 000	>500	500
MECHANICAL PROPERTIES									
Weight [kg/km]		39,5	40,5	26,5	41,5	43,5	43,5	41,5	41
Min. bending radius single/multiple [mm]		30/60	30/60	25/50	35/70	30/60	35/70	35/70	30/60
Operating temperature [°C]	Operating	-20 ~ +75							
	During installation	+5 ~ +60							
Packaging method	Length [m]	100 | 250	100 | 250	100 | 250	100 | 250 | 500	100 | 250	250 | 500	100 | 500	100
	Reel type	paper	paper	paper	paper | wood	paper	paper | wood	paper | wood	paper
	Metrage marking	yes							
RECOMMENDED CONNECTOR TYPES									
Order code	F screw-on	K7331	K7331	K7321	K7351	K7351	K7351	K7351	K7351

Coaxial cables

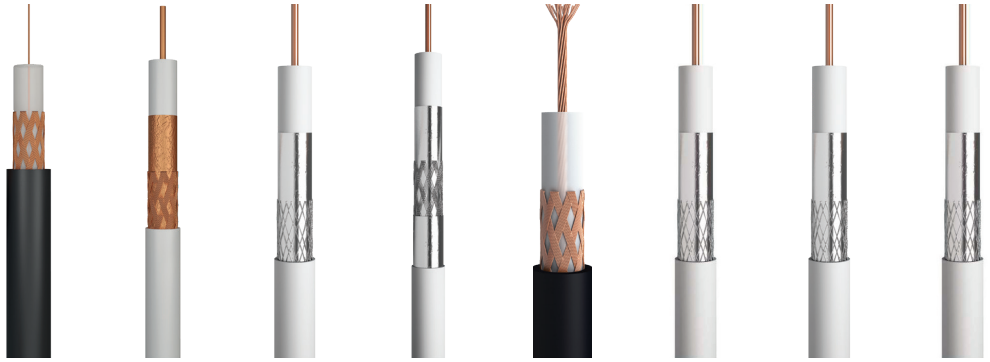

Order code		S5194	S5385	S5381 | S5381E	S5382 | S5383	S5213	S5374	S5375	S5376
Type of coaxial cable		RG59B/U	CB 125	CB 130	CB 135	RG58U	CB130	CB130	CB130
Type						50Ω	75 Ohm	75 Ohm	75 Ohm
Class		–	–	–	CLASS A	–	–	–	–
DESIGN PARAMETERS									
Internal conductor Ø [mm], mat.		0,58 Cu	1,02 Cu	1,02 CCS	1,02 CCS	17× 0,19 CCA	1,02 CCS	1,02 CCS	1,02 CCS
Dielectric Ø [mm], type		3,7 FPE	4,8 FPE	4,8 FPE	4,8 FPE	3 SPE	4,8 FPE	4,8 FPE	4,8 FPE
Shielding	I.foil	–	1× CCA/PES	1× Al/PES	1× Al/PES	–	1× Al/PES	1× Al/PES	1× Al/PES
	Conductors Ø [mm]	CCA 128× 0,12	CCA 64× 0,12	Al 32× 0,12	Al 64× 0,12	CCA 112× 0,12	Al 32× 0,12	Al 32× 0,12	Al 32× 0,12
	II.foils	–	–	–	Al/PES	–	–	–	–
Jacket Ø [mm]		6,05±0,2	6,8±0,2	6,8±0,2	6,8±0,2	5±0,2	6,8±0,2	6,8±0,2	6,8±0,2
Material		PVC	PVC	PVC	PVC	PVC	PVC	PVC	PVC
Colour		black	white	white	white	black	white	white	white
ELECTRICAL PARAMETERS									
Impedance [Ω]		50±3					75±3	75±3	75±3
Capacity [pF/m]		70	54	55	75	100	55	55	55
Shortening coefficient		0,66	0,83	0,84	0,85	0,66	0,84	0,84	0,84
Maximum attenuation at 20 °C [dB/100 m]	10 MHz	3	2,28	2,32	2,28	8,5	2,32	2,32	2,32
	100 MHz	9	7,1	7,4	7,2	14,2	7,4	7,4	7,4
	450 MHz	20	14,4	15,5	15	32,9	15,5	15,5	15,5
	650 MHz	28	17,6	18,2	18,3	47,2	18,2	18,2	18,2
	860 MHz	32	20,6	20,8	20,7	–	20,8	20,8	20,8
	1 000 MHz	–	21,3	22,5	21,9	–	22,5	22,5	22,5
	2 000 MHz	–	31,5	34	33,5	–	34	34	34
Maximum return loss at 20 °C [dB]	10–300 MHz	20	23	25	25	–	25	25	25
	300–600 MHz	16	20	23	23	18	23	23	23
	600–900 MHz	16	20	20	20	16	20	20	20
Min. shielding effectiveness [dB]	10–800 MHz	90	77	75	>110	65	75	75	75
Max. DC resistance at 20 °C [Ω/km]	Inner core	170	23,9	25,7	25,3	37,6	25,7	25,7	25,7
	Outer core	17	38,9	45,9	49,2	17,1	45,9	45,9	45,9
Insulation resistance between cores at 20 °C" [MΩ/km]		>10 000	500	500	500	500	500	500	500
MECHANICAL PROPERTIES									
Weight [kg/km]		55	40,5	40,5	40,5	40,5	40,5	40,5	40,5
Min. bending radius single/multiple [mm]		25/50	30/60	30/60	30/60	25/50	30/60	30/60	30/60
Operating temperature [°C]	Operating	-20 – +75							
	During installation	+5 – +60							
Packaging method	Length [m]	500	100	100	100 | 500	500	10	15	20
	Reel type	paper | wood	paper	paper | PVC	paper | wood	wood	paper | PVC	paper | PVC	paper | PVC
	Metrage marking	yes							
RECOMMENDED CONNECTOR TYPES									
Order code	F screw-on	K7331	K7351	K7331	K7331	–	*K7331	*K7331	*K7331

Digital and clamp multimeters









Order code	M3620N	M0305N	M3216N	M0230N	M2092N	M0391N	M0320N
Series	300			200			100
Type	MD-310	MD-310C	MD-300	MD-230	MD-220	MD-210	MD-110
Range selection	manual	automatic	automatic	manual	manual	manual	manual
AC voltage	200 – 300 V	2 – 600 V	2–600 V	2 – 600 V	2 – 600 V	200 – 300 V	200 – 300 V
DC voltage	200 mV – 300 V	200 mV – 600 V	200 mV – 600 V	200 mV – 600 V	200 mV – 600 V	200 mV – 300 V	200 mV – 300 V
AC current	–	–	200 µA – 200 mA	2 mA – 10 A	2 mA – 10 A	–	–
DC current	20 mA – 10 A	2 – 600 A	200 µA – 200 mA	2 mA – 10 A	2 mA – 10 A	20 µA – 10 A	2 000 µA – 200 mA
Electrical resistance	200 Ω – 2 MΩ	200 Ω – 20 MΩ	200 Ohm – 20 MOhm	200 Ω – 20 MΩ	200 Ω – 20 MΩ	200 Ω – 2 MΩ	200 Ω – 2 MΩ
Circuit continuity	yes	yes	yes	yes	yes	yes	–
Diode test	yes	yes	yes	yes	yes	yes	yes
Transistor test	–	–	–	yes	yes	–	–
Battery test	yes	–	–	–	–	–	yes
Temperature measurement	–	–	–	–	–	–	–
Touchless AC voltage detection	–	–	–	–	–	–	–
Product details	safe measuring tip connection technology	–	–	–	–	–	–






Order code	M0430N	M0420N	M3691N	M0400N
Series	400			
Type	MD-430	MD-420	MD-410	MD-410C
Range selection	automatic + manual	automatic	manual	automatic + manual
AC voltage	600 mV – 750 V	2 – 300 V	200 mV – 300 V	4 V – 600 V
DC voltage	600 mV – 1 000 V	200 µA – 10 A (to 1 000 A)	200 mV – 300 V	400 mV – 600 V
AC current	600 µA – 10 A	200 mV – 300 A	20 mA – 10 A	400 A
DC current	600 µA – 10 A	200 µA – 10 A (to 1 000 A)	20 mA – 10 A	400 A
Electrical resistance	600 Ohm – 60 MOhm	200 Ω – 20 MΩ	200 Ω – 20 MΩ	400 Ω – 40 MΩ
Circuit continuity	yes	yes	yes	yes
Diode test	yes	yes	yes	yes
Transistor test	yes	yes	–	–
Battery test	–	–	yes	–
Temperature measurement	-40 °C to +300 °C	-20 °C to +1 000 °C	0 °C to +1 000 °C	-20 °C to +1 000 °C
Touchless AC voltage detection	–	–	yes	–
Product details	maximum value memory, measured value memory	–	safe measuring tip connection technology	–

Voltage testers



Order code	M0071N	M0012AN	M0014AN	M0003BN	M0007AN	M0048N	M0049N	M0018N	M0017	M0016
Series	700	300		200	100					
Type	VT-710	VT-320	VT-310	VT-211	VT-150	VT-120	VT-103	VT-110	VT-102	VT-101
AC voltage	6 – 690 V	12 – 690 V	110 – 400 V	6–400 V	70 – 1 000 V touchless	70 – 250 V touchless	12–250 V touchless	70 – 250 V touchless	0–250 V	0–250 V
DC voltage	6 – 690 V	12 – 690 V	110 – 400 V	6–400 V		0 – 250 V touchless	12–230 V touchless	0 – 250 V touchless	200–250 V	200–250 V
Indication	optical + acoustic	optical + acoustic	optical	optical	optical + acoustic	optical + acoustic	optical	optical	optical	optical
Determination of polarity	yes	yes	yes	yes	–	yes	–	yes	–	–
Determination of phase sequence	yes	yes	yes	–	–	–	–	–	–	–
Circuit continuity	yes	yes	–	–	–	–	–	–	–	–

Measuring tools



Order code	M0501N	M0502	M0503N	N0322
Name	Multidetector	Laser distance meter	IR thermometer	Universal battery tester
Product details	detection of AC wiring, metal and wood	0,05 – 40 m, length, area, volume, Pythagoras, continuous measurement	optical characteristic 12:1, laser measurement, continuous measurement, memory, -50 °C to 550 °C	for batteries AAA, AA, C, D, 9 V, button

EMOS Thermostats



Order code	P5611OT	P5616OT	P5606OT	P5603R	P5614
Thermostat type	wireless with OpenTherm communication	wireless with OpenTherm communication	wired with OpenTherm communication	wire	wireless
Control mode	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system
Number of programs	6 programs + 3 customizable	1 customizable program and customizable temperature (6× per day)	1 customizable program and customizable temperature (6× per day)	customizable temperature	customizable temperature
Temperature setting type	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day	manually	manually
Temperature setting	from 7 °C up to 30 °C, by 0.2 °C	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 30 °C, by 1 °C	from 5 °C up to 35 °C, by 0.5 °C
Adjustable variance of temperature	0.1 °C, 0.2 °C, 0.5 °C, 1.0 °C	from 0.2 °C up to 2 °C, by 0.1 °C	from 0.2 °C up to 2 °C, by 0.1 °C	0,4 °C	±0.2 °C
ON/OFF function	yes	yes	yes	–	yes
Holiday mode	–	yes	yes	–	–
Switching	230 V AC and potential-free	230 V AC and potential-free	230 V AC and potential-free	230 V AC and potential-free	230 V AC and potential-free
Switching load	16 A resistive, 5 A inductive	10 A resistive, 4 A inductive	6 A resistive, 2 A inductive	6 A resistive, 2 A inductive	16 A resistive, 4 A inductive
Power supply	230 V AC (receiver)/ 2× 1.5 V AA (transmitter)	230 V AC (receiver)/ 2× 1.5 V AA (transmitter)	2× 1.5 V AA (included)	2× 1.5 V AA (included)	230 V AC (receiver)/ 2× 1.5 V AAA (transmitter)
Other features	OpenTherm & relay output, lock function, illuminated display, range 100 m	OpenTherm & relay output, lock function, illuminated display, range 100 m	OpenTherm & relay output, lock function, illuminated display	freeze protection	freeze protection, illuminated display, range 100 m



Order code	P5604	P5607	P5608	P5618	P5660SH	P56601SH	P5660FR	P56601FR
Thermostat type	wire	wire	wire	wireless	socket	socket	socket	socket
Control mode	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system
Number of programs	customizable temperature	1 customizable program and customizable temperature (6× per day)	user adjustable temperature	user adjustable temperature	customizable temperature (6× per day)	customisable temperature (6× per day)	customizable temperature (6× per day)	customisable temperature (6× per day)
Temperature setting type	manually	6 temperature changes per day	manually	manually	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day
Temperature setting	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 35 °C, after 0.5 °C	from 5 °C up to 35 °C, after 0.5 °C	5 °C to 40 °C, resolution 0.5 °C	5 °C to 40 °C, resolution 0.5 °C	5 °C to 40 °C, resolution 0.5 °C	5 °C to 40 °C, resolution 0.5 °C
Adjustable variance of temperature	±0.2 °C	from 0.2 °C up to 2 °C, by 0.1 °C	from 0.2 °C up to 2 °C, after 0.1 °C	from 0.2 °C up to 2 °C, after 0.1 °C	from 0.2 °C up to 2 °C, by 0.1 °C	from 0.2 °C up to 2 °C, after 0.1 °C	from 0.2 °C up to 2 °C, by 0.1 °C	from 0.2 °C up to 2 °C, after 0.1 °C
ON/OFF function	–	–	yes	yes	yes	yes	yes	yes
Holiday mode	–	–	–	–	–	–	–	–
Switching	230 V AC and potential-free	230 V AC and potential-free	230 V AC or potential-free	230 V AC or potential-free	230 V AC and potential-free	230 V AC or potential-free	230 V AC and potential-free	230 V AC or potential-free
Switching load	8 A resistively, 2 A inductively	8 A resistively, 2 A inductively	6 A resistive, 2 A inductive	16 A resistive, 4 A inductive	16 A resistive, 4 A inductive	16 A resistive, 4 A inductive	16 A resistive, 4 A inductive	16 A resistive, 4 A inductive
Power supply	2× 1.5 V AAA (included)	2× 1.5 V AAA (included)	2× 1.5 V AA (included)	2× 1.5 V AA (included)	230 V AC	–	230 V AC	–
Other features	freeze protection, illuminated display	freeze protection, illuminated display	temperature calibration	temperature calibration	freeze protection, temperature calibration, timer (countdown, summer/winter time)	backlight display, temperature calibration	freeze protection, temperature calibration, timer (countdown, summer/winter time)	backlight display, temperature calibration

EMOS Thermostats



Order code	P56201	P56211	P56201UF | P56201BUF	P5631S
Thermostat type	wire	wireless	wired for underfloor heating	SMART, programmable thermo knob
Control mode	heating and cooling system	heating and cooling system	heating system	heating system
Number of programs	customizable temperature (6× per day)	customizable temperature (6× per day)	customizable temperature (6× per day)	1 customizable program and customizable temperature (6× per day)
Temperature setting type	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day
Temperature setting	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 35 °C, by 0.5 °C	from 1 °C up to 70 °C, by 0.5 °C	5 °C to 30 °C, resolution 0.5 °C
Adjustable variance of temperature	0.2 °C to 2 °C (resolution 0.1 °C)	0.2 °C to 2 °C (resolution 0.1 °C)	internal sensor: 0.5 °C to 2.5 °C, resolution 0.5 °C; underfloor sensor: 1 °C to 9 °C, resolution 1 °C	from 0.5 °C up to 1.5 °C, by 0.5 °C
ON/OFF function	yes	yes	yes	–
Holiday mode	yes	yes	yes	yes
Switching	voltage 230 V AC, 50 Hz	230 V AC and potential-free	voltage 230 V AC, 50 Hz	–
Switching load	6 A resistive, 2 A inductive	16 A resistive, 4 A inductive	16 A resistive	–
Power supply	230 V AC	230 V AC (receiver)/5 V (transmitter)	230 V AC	2× 1.5 V AA (included)
Other features	freeze protection, temperature calibration, switching based on GPS location	freeze protection, temperature calibration, switching based on GPS location	freeze protection, temperature calibration, switching based on GPS location	freeze protection, temperature calibration, child lock, switching based on GPS location
Matrix	–	–	–	M28 × 1.5 mm
Included adaptors	–	–	–	RAV, RA, RAVL, Giacomini, Caleffi



Order code	P56A01	P56A02	P56A11	P56S01	P56S01F	P56S11
Thermostat type	wired with OpenTherm communication + underfloor heating	wired with OpenTherm communication	wireless with OpenTherm communication	wired with OpenTherm communication + underfloor heating	wired with OpenTherm communication + underfloor heating, cocealed	wireless with OpenTherm communication
Control mode	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system
Number of programs	6 + 3 customizable for users	6 + 3 customizable for users	6 + 3 customizable for users	6 + 3 customizable for users	6 + 3 customizable for users	6 + 3 customizable for users
Temperature setting type	comfort and economy temperature	comfort and economy temperature	comfort and economy temperature	comfort and economy temperature	comfort and economy temperature	comfort and economy temperature
Temperature setting	from 7 °C up to 30 °C, after 0.2 °C	from 7 °C up to 30 °C, after 0.2 °C	from 7 °C up to 30 °C, after 0.2 °C	from 7 °C up to 30 °C, after 0.2 °C	from 7 °C up to 30 °C, after 0.2 °C	from 7 °C up to 30 °C, after 0.2 °C
Adjustable variance of temperature	0.1 °C, 0.2 °C, 0.5 °C, 1.0 °C	0.1 °C, 0.2 °C, 0.5 °C, 1.0 °C	0.1 °C, 0.2 °C, 0.5 °C, 1.0 °C	0.1 °C to 1 °C (resolution 0.1 °C)	0.1 °C to 1 °C (resolution 0.1 °C)	0.1 °C to 1 °C (resolution 0.1 °C)
ON/OFF function	yes	yes	yes	yes	yes	yes
Holiday mode	yes	yes	yes	yes	yes	yes
Switching	230 V AC or potential-free	230 V AC or potential-free	230 V AC or potential-free	230 V AC or potential-free	230 V AC or potential-free	230 V AC or potential-free
Switching load	16 A resistive, 5 A inductive	8 A resistively, 2 A inductively	16 A resistive, 5 A inductive	16 A resistive, 5 A inductive	16 A resistive, 5 A inductive	16 A resistive, 5 A inductive
Power supply	230 V AC	2× 1.5 V AA (included)	230 V AC (receiver) / 2× 1.5 V AA / 5 V USB adapter (transmitter)	230 V AC	230 V AC	230 V AC (receiver) / 5 V USB adapter (transmitter)
Other features	backlight display, anti-frost protection, temperature calibration	backlight display, anti-frost protection, temperature calibration	backlight display, anti-frost protection, temperature calibration	backlight display, anti-frost protection, temperature calibration	backlight display, anti-frost protection, temperature calibration	backlight display, anti-frost protection, temperature calibration

Thermostats



Order code	P5681	P5682	P5683	P5684	P5685	P5686
Thermostat type	wire, flow thermostat	wire, capillary sensor thermostat	wire, flow thermostat	wire, capillary sensor thermostat	wire, flow thermostat	wire, flow thermostat
Control mode	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system
Number of programs	–	–	–	–	–	–
Temperature setting type	manually	manually	manually	manually	manually	manually
Temperature setting	0 °C to 90 °C, resolution 5 °C	0 °C to 90 °C, resolution 5 °C	from 5 °C up to 80 °C, by 0.1 °C	from 5 °C up to 90 °C, by 0.1 °C	0 °C to 90 °C, resolution 5 °C	from 5 °C up to 80 °C, by 0.1 °C
Adjustable variance of temperature	–	–	from 0.1 °C up to 15 °C, by 0.1 °C	from 0.1 °C up to 15 °C, by 0.1 °C	–	from 0.1 °C up to 15 °C, by 0.1 °C
ON/OFF function	–	–	yes	yes	–	yes
Holiday mode	–	–	–	–	–	–
Switching	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz
Switching load	16 A resistive, 4 A inductive	16 A resistive, 4 A inductive	5 A resistively, 1.5 A inductively	5 A resistively, 1.5 A inductively	16 A resistive, 4 A inductive	5 A resistively, 1.5 A inductively
Power supply	230 V, 400 V AC	230 V, 400 V AC	230 V AC	230 V AC	230 V, 400 V AC	230 V AC
Other features	–	–	display with set/current temperature, LED indication of thermostat activation, ON/OFF function	display with set/current temperature, LED indication of thermostat activation, ON/OFF function	–	–

Gas and smoke detectors



Order code	P56502	P56300	P56402	P56501	P56500	P56450	P56503X
Detection: carbon monoxide	–	yes	yes	–	–	–	–
Detection: smoke	yes	–	–	yes	yes	–	yes
Detection: flammable gases	–	–	–	–	–	yes	–
Optical indication	yes	yes	yes	yes	yes	yes	yes
Audio indication	yes	yes	yes	yes	yes	yes	yes
Wall-mounted and free-standing	yes	yes	yes	yes	yes	yes	yes
Mutual pairing of detectors	yes	–	–	–	yes	–	–
Central heating boilers	yes	yes	yes	yes	yes	yes	yes
Cooker, water heater	yes	yes	yes	yes	yes	yes	yes
Tankless water heater	–	yes	yes	–	–	yes	–
Storage tank water heater	–	yes	yes	–	–	yes	–
Garage (exhaust gases)	–	–	yes	–	–	–	–
Fireplace	yes	yes	yes	yes	yes	–	yes
Power supply	230 V AC, back-up battery: 1× 9 V, included	1× 9 V, included	2× 1,5 V AA	1× 9 V	2× 1,5 V AA	from 230 V AC mains	1× 9 V, included
Detector life	10 years	10 years	10 years	10 years	10 years	5 years	10 years

Wireless doorbells



Order code	P5735WS	P5735SS	P5750	P5750.2T	P5750.2R	P5760N	P5763N
Transmission method	wireless bell						
Reach of the button	150 m	150 m	150 m	150 m	150 m	180 m	180 m
Number of melodies	52	52	10	10	10	16	16
Pairing method	automatic pairing–self-learning						
Special functions	setting a different melody and volume for each button paired in the app	setting a different melody and volume for each button paired in the app	battery-free button	battery-free button	battery-free button	USB–C output – PD 20W, repeater function – allows to extend the reach of the button by a few hundred meters	repeater function – allows extending the range of the button by several hundred meters.
Optical signaling on the doorbell	yes	yes	yes	yes	yes	yes	yes
Optical signaling on the button	yes	yes	yes	yes	yes	yes	yes
Maximum ringing volume	110 dB	110 dB	95 dB	95 dB	95 dB	85 dB	85 dB
Option to add another button	yes, max. 8 + 2 v APP	yes, max. 8 + 2 v APP	yes, max. 8	yes, max. 8	yes, max. 8	yes, max. 8	yes, max. 8
Number of buttons in a package	1 pc	1 pc	1 pc	2 pcs	1 pc	1 pc	1 pc
Extra (spare) button	P5734T	P5734T	P5750T	P5750T	P5750T	P5760T	P5760T
Waterproof button	IP44	IP44	IP44	IP44	IP44	IP44	IP44
Power button	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)	unpowered	unpowered	unpowered	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)
Power supply of the main unit	230 V AC	230 V AC	230 V AC	230 V AC	230 V AC	230 V AC	3× 1.5 V AA (not included)
Number of receivers in a package	1 pc	1 pc	1 pc	1 pc	2 pcs	1 pc	1 pc
Volume control	yes, 4 levels	yes, 4 levels	yes, 5 levels	yes, 5 levels	yes, 5 levels	yes, 5 levels	yes, 5 levels
Transmission frequency	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz
Colour	white	silver	red	red	red	silver	silver
Doorchime dimensions	80 × 80 × 65 mm	80 × 80 × 65 mm	66 × 57 × 107 mm	66 × 57 × 107 mm	66 × 57 × 107 mm	66 × 63 × 110 mm	34 × 65 × 116 mm
Button dimensions	19 × 38 × 92 mm	19 × 38 × 92 mm	24 × 90 × 40 mm	24 × 90 × 40 mm	24 × 90 × 40 mm	16 × 101 × 39 mm	15 × 101 × 39 mm



Order code	P5763RN	P5737	P5736	P5734B	P5734	P5733W	P5733S
Transmission method	wireless bell						
Reach of the button	180 m	150 m	150 m	150 m	150 m	150 m	150 m
Number of melodies	16	36	36	10	10	36	36
Pairing method	automatic pairing–self-learning						
Special functions	repeater function – allows extending the range of the button by several hundred meters.	–	–	–	–	highly visible optical signalisation when ringing	highly visible optical signalisation when ringing
Optical signaling on the doorbell	yes	yes	yes	yes	yes	yes	yes
Optical signaling on the button	yes	yes	yes	yes	yes	yes	yes
Maximum ringing volume	85 dB	90 dB	90 dB	85 dB	85 dB	110 dB	110 dB
Option to add another button	yes, max. 8	yes, max. 8	yes, max. 8	yes, max. 8	yes, max. 8	yes, max. 8	yes, max. 8
Number of buttons in a package	not supplied	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc
Extra (spare) button	P5760T	P5723T	P5723T	P5734T	P5734T	P5732T	P5732T
Waterproof button	–	IP55	IP55	IP56	IP56	IP44	IP44
Power button	–	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)
Power supply of the main unit	3× 1.5 V AA (not included)	230 V AC	3× 1.5 V AA (not included)	230 V AC	230 V AC	230 V AC	230 V AC
Number of receivers in a package	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc
Volume control	yes, 5 levels	yes, 4 levels	yes, 4 levels	yes, 5 levels	yes, 5 levels	yes, 4 levels	yes, 4 levels
Transmission frequency	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz
Colour	silver	white	white	black	white	white	silver
Doorchime dimensions	34 × 65 × 116 mm	90 × 85 × 75 mm	90 × 85 × 32 mm	72 × 42 × 42 mm	72 × 42 × 42 mm	74 × 74 × 74 mm	74 × 74 × 74 mm
Button dimensions	–	82 × 40 × 20 mm	82 × 40 × 20 mm	19 × 38 × 92 mm	19 × 38 × 92 mm	17 × 40 × 60 mm	17 × 40 × 60 mm

Wireless doorbells



Order code	P5733G	P5731	P5730	P5729B	P5729	P5728	P5727N
Transmission method	wireless bell						
Reach of the button	150 m	180 m	180 m	180 m	180 m	180 m	150 m
Number of melodies	36	36	52	36	36	52	10
Pairing method	automatic pairing–self-learning						
Special functions	highly visible optical signalisation when ringing	battery-free button	–	battery-free button	battery-free button	–	no
Optical signaling on the doorbell	yes	yes	yes	yes	yes	yes	yes
Optical signaling on the button	yes	yes	yes	yes	yes	yes	yes
Maximum ringing volume	110 dB	90 dB	90 dB	90 dB	90 dB	90 dB	100 dB
Option to add another button	yes, max. 8	yes, max. 6	yes, max. 6	yes, max. 6	yes, max. 6	yes, max. 6	yes, max. 8
Number of buttons in a package	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc
Extra (spare) button	P5732T	P5729T	P5728T	P5729T	P5729T	P5728T	P5734T
Waterproof button	IP44	IP44	IP56	IP44	IP44	IP56	IP56
Power button	1× 3 V CR2032 (included)	unpowered	1× 12 V A23 (included)	unpowered	unpowered	1× 12 V A23 (included)	1× 3 V CR2032 (included)
Power supply of the main unit	230 V AC	230 V AC	3× 1.5 V AAA (not included)	230 V AC	230 V AC	3× 1.5 V AAA (not included)	230 V AC
Number of receivers in a package	1 pc	2 pcs	2 pcs	1 pc	1 pc	1 pc	1 pc
Volume control	yes, 4 levels	yes, 4 levels	yes, 5 levels	yes, 4 levels	yes, 4 levels	yes, 5 levels	yes, 5 levels
Transmission frequency	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz
Colour	green	white	black	black	white	black	black
Doorchime dimensions	74 × 74 × 74 mm	73 × 81 × 81 mm	26 × 81 × 81 mm	73 × 81 × 81 mm	73 × 81 × 81 mm	26 × 81 × 81 mm	97 × 63 × 61 mm
Button dimensions	17 × 40 × 60 mm	22 × 49 × 82 mm	19 × 42 × 72 mm	22 × 49 × 82 mm	22 × 49 × 82 mm	19 × 42 × 72 mm	19 × 38 × 92 mm



Order code	P5723	P57U01	P5739W	P5739B	P57P01	P57P02	P57103
Transmission method	wireless bell						wireless/wired doorchime
Reach of the button	100 m	150 m	150 m	150 m	150 m	150 m	180 m or wiring connection
Number of melodies	36	10	38	38	38	38	10
Pairing method	automatic pairing–self-learning						
Special functions	–	1× USB–C output – PD 35 W; 1× USB–A output – 5 V/3 A/15 W	battery-free button	battery-free button	PIR sensor	PIR sensor	dual button connection
Optical signaling on the doorbell	–	yes	yes	yes	yes	yes	–
Optical signaling on the button	yes	yes	yes	yes	yes	yes	yes
Maximum ringing volume	75 dB	100 dB	100 dB	100 dB	90 dB	90 dB	90 dB
Option to add another button	yes, max. 8	yes, max. 8	yes, max. 6	yes, max. 6	yes, max. 8	yes, max. 8	yes, max. 8
Number of buttons in a package	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc
Extra (spare) button	P5723T	P5734T	P5739T	P5739T	–	–	P5734T; P57000T
Waterproof button	IP44	IP56	IP44	IP44	–	–	IP54
Power button	1× 3 V CR2032 (included)	1× 3 V CR2032 (included)	unpowered	unpowered	3× 1.5 V AAA (not included) + USB-C 5 V	3× 1.5 V AAA (not included) + USB-C 5 V	1× 3 V CR2032 (included)
Power supply of the main unit	3× 1.5 V AA (not included)	230 V AC	230 V AC	230 V AC	230 V AC	3× 1.5 V AAA (not included) + USB-C 5 V	230 V AC
Number of receivers in a package	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc
Volume control	–	yes, 5 levels	yes, 4 levels	yes, 4 levels	yes, 4 levels	yes, 4 levels	yes, 4 levels
Transmission frequency	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz	433 MHz
Colour	white	black	white	black	white	white	white
Doorchime dimensions	29 × 72 × 125 mm	95 × 54 × 71 mm	91 × 47 × 55 mm	91 × 47 × 55 mm	82 × 82 × 65 mm	82 × 82 × 22 mm	90 × 50 mm
Button dimensions	23 × 93 × 34 mm	19 × 38 × 92 mm	77 × 40 × 20 mm	77 × 40 × 20 mm	82 × 75 × 47 mm	82 × 75 × 47 mm	19 × 38 × 92 mm

Wired doorbells



Order code	P57002	P57001	P57102	P57101	P57104	P57000TR	P57103
Transmission method	wired bell					doorbell transformer	wireless/wired doorchime
Reach of the button	wiring connection					–	180 m or wiring connection
Number of melodies	1	1	1	1	1	–	10
Pairing method	none	none	none	none	none	–	automatic pairing–self-learning
Special functions	–	–	–	–	–	–	dual button connection
Optical signaling on the doorbell	–	–	–	–	–	–	–
Optical signaling on the button	–	–	–	–	–	–	yes
Maximum ringing volume	85 dB	85 dB	85 dB	85 dB	90 dB	–	90 dB
Option to add another button	–	–	–	–	–	–	yes, max. 8
Number of buttons in a package	not supplied	not supplied	not supplied	not supplied	not supplied	–	1 pc
Extra (spare) button	–	–	P57000T	P57000T	P57000T	–	P5734T; P57000T
Waterproof button	–	–	–	–	–	–	IP54
Power button	wiring connection	wiring connection	wiring connection	wiring connection	wiring connection	8 V, 12 V, 24 V	1× 3 V CR2032 (included)
Power supply of the main unit	230 V AC	230 V AC	4×1.5V AA/ transformer (all not included)	4×1.5V AA/ transformer (all not included)	12V AC	–	230 V AC
Number of receivers in a package	1 pc	1 pc	1 pc	1 pc	1 pc	–	1 pc
Volume control	–	–	–	–	–	–	yes, 4 levels
Transmission frequency	wiring connection	wiring connection	wiring connection	wiring connection	wiring connection	–	433 MHz
Colour	white	white	white	white	white/chrome	–	white
Doorchime dimensions	163 × 105 × 36 mm	110 × 110 × 45 mm	170 × 105 × 49 mm	118 × 118 × 45 mm	75 × 35 mm	85 × 64 × 35 mm	90 × 50 mm
Button dimensions	–	–	–	–	–	–	19 × 38 × 92 mm

Tapes



Order code	F62512	F61511	F61512	F61513	F61514	F61515	F61999	F61516
Tape type	PVC							
Width	25 mm	15 mm	15 mm	15 mm	15 mm	15 mm	19 mm	15 mm
Length	10 m	10 m	10 m	10 m	10 m	10 m	20 m	10 m
Thickness	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm
Colour	black	white	black	red	blue	green/yellow	colour mix	yellow
Adhesive material	rubber	rubber	rubber	rubber	rubber	rubber	rubber	rubber
UV resistant	yes	yes	yes	yes	yes	yes	yes	yes
Elongation	125 %	125 %	125 %	125 %	125 %	125 %	125 %	125 %
Tensile strength	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm
Adhesion to steel - minimum	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm
Adhesion to the substrate	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm
Electric strength - minimum	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm
Electric strength after moisture - minimum	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm
Water resistant	yes	yes	yes	yes	yes	yes	yes	yes
Creates pressure-tight joint	–	–	–	–	–	–	–	–
Installation temperature range	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C
Self-extinguishing	–	–	–	–	–	–	–	–
Complies with	ČSN EN 60454-3-1					ČSN EN 60454-3-1-2/F-PVC/60		



Order code	F61517	F61519	F615992	F61590	F61912	F61921	F61922	F61923
Tape type	PVC							
Width	15 mm	15 mm	15 mm	15 mm	19 mm	19 mm	19 mm	19 mm
Length	10 m	10 m	10 m	8 m	10 m	20 m	20 m	20 m
Thickness	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm
Colour	brown	green	colour mix	colour mix	black	white	black	red
Adhesive material	rubber	rubber	rubber	rubber	rubber	rubber	rubber	rubber
UV resistant	yes	yes	yes	–	yes	yes	yes	yes
Elongation	125 %	125 %	125 %	–	125 %	125 %	125 %	125 %
Tensile strength	150 N/10 mm	150 N/10 mm	150 N/10 mm	18 N/19 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm
Adhesion to steel - minimum	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,3 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm
Adhesion to the substrate	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,3 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm
Electric strength - minimum	40 kV/mm	40 kV/mm	40 kV/mm	2,5 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm
Electric strength after moisture - minimum	35 kV/mm	35 kV/mm	35 kV/mm	–	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm
Water resistant	yes	yes	yes	–	yes	yes	yes	yes
Creates pressure-tight joint	–	–	–	–	–	–	–	–
Installation temperature range	-25–90 °C	-25–90 °C	-25–90 °C	0–80 °C	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C
Self-extinguishing	–	–	yes	–	–	–	–	–
Complies with	ČSN EN 60454-3-1-2/F-PVC/60		ČSN EN 60454-3-1	–	ČSN EN 60454-3-1			

Tapes



Order code	F61924	F61925	F61926	F61927	F61929	F6090	F6300	F6100
Tape type	PVC					PE foam	acrylic double-sided tape	PVC base
Width	19 mm	19 mm	19 mm	19 mm	19 mm	20 mm	30 mm	100 mm
Length	20 m	20 m	20 m	20 m	20 m	3 m	3 m	1 m
Thickness	0.13 mm	0.13 mm	0.13 mm	0.13 mm	0.13 mm	1.00 mm	2 mm	0.7 mm
Colour	blue	green/yellow	yellow	brown	green	white	transparent	transparent
Adhesive material	rubber	rubber	rubber	rubber	rubber	acrylic	acrylic	synthetic adhesive
UV resistant	yes	yes	yes	yes	yes	–	–	yes
Elongation	125 %	125 %	125 %	125 %	125 %	–	–	–
Tensile strength	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm	150 N/10 mm	–	–	–
Adhesion to steel - minimum	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	1,8 N/10 mm	–	–	–
Adhesion to the substrate	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	1,5 N/10 mm	–	–	–
Electric strength - minimum	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm	40 kV/mm	–	–	–
Electric strength after moisture - minimum	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm	35 kV/mm	–	–	–
Water resistant	yes	yes	yes	yes	yes	–	–	yes
Creates pressure-tight joint	–	–	–	–	–	–	–	–
Installation temperature range	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C	-25–90 °C	5–80 °C	5–80 °C	-25–90 °C
Self-extinguishing	–	–	–	–	–	–	–	–
Complies with	ČSN EN 60454-3-1		ČSN EN 60454-3-1-2/F-PVC/60			–	–	–



Order code	F6110	F6200	F6210	F6301	F6302	F6515	F6910	F52502
Tape type	PVC base	PE base	insect stop repair tape	double side NANOGRID tape	double side DUCT tape	asphalt textile tape	asphalt textile tape	self-amalgamating tape
Width	100 mm	50 mm	50 mm	19 mm	50 mm	15 mm	19 mm	25 mm
Length	1 m	25 m	2 m	3 m	10 m	15 m	10 m	5 m
Thickness	0.7 mm	0.15 mm	1.00 mm	2 mm	1.00 mm	0.4 mm	0.4 mm	0.76 mm
Colour	black	transparent	transparent	transparent	transparent	black	black	black
Adhesive material	synthetic adhesive	acrylic	hot melt	acrylic	hot melt	asphalt	asphalt	rubber
UV resistant	yes	yes	yes	yes	yes	yes	yes	–
Elongation	–	–	–	–	–	–	–	up to 300 %
Tensile strength	–	–	–	–	–	–	–	–
Adhesion to steel - minimum	–	–	–	–	–	–	–	–
Adhesion to the substrate	–	–	–	–	–	–	–	–
Electric strength - minimum	–	–	–	–	–	1 kV/mm	1 kV/mm	14 kV/mm
Electric strength after moisture - minimum	–	–	–	–	–	–	–	–
Water resistant	yes	–	–	–	–	–	–	yes
Creates pressure-tight joint	–	–	–	–	–	–	–	–
Installation temperature range	-25–90 °C	-25–90 °C	5–40 °C	5–40 °C	5–40 °C	5–40 °C	5–40 °C	5–95 °C
Self-extinguishing	–	–	–	–	–	–	–	–
Complies with	–	–	–	–	–	–	–	–

Tapes









Order code	F52503	F51912	F6030	F87525	F6060	F6080	F6070
Tape type	silicone vulcanisation	self-amalgamating tape	universal adhesive DUCT TAPE	LDPE (low-density polyethylene) warning tape	acrylic double-sided tape	acrylic double-sided tape	reflexive safety tape
Width	25 mm	19 mm	48 mm	75 mm	12 mm	18 mm	25 mm
Length	3 m	10 m	10 m	250 m	3 m	3 m	2 m
Thickness	0.60 mm	0.76 mm	0.21 mm	0.03 mm	1.00 mm	1.00 mm	0.19 mm
Colour	black	black	silver	red/white	transparent	transparent	colour mix
Adhesive material	with no glue	rubber	synthetic rubber	with no glue	acrylic	acrylic	rubber
UV resistant	yes	–	yes	yes	yes	yes	yes
Elongation	up to 400 %	up to 300 %	–	–	–	–	–
Tensile strength	–	–	–	–	–	–	–
Adhesion to steel - minimum	–	–	–	–	–	–	2 N/10 mm
Adhesion to the substrate	–	–	–	–	2 kg/30 cm	2 kg/30 cm	1,5 N/10 mm
Electric strength - minimum	8 kV/mm	14 kV/mm	–	–	–	–	–
Electric strength after moisture - minimum	–	–	–	–	–	–	–
Water resistant	yes	yes	–	–	–	–	–
Creates pressure-tight joint	yes	–	–	–	–	–	–
Installation temperature range	-60–260 °C	5–95 °C	5–80 °C	5–30 °C	5–40 °C	5–40 °C	-25–90 °C
Self-extinguishing	–	–	–	–	yes	yes	–
Complies with	–	–	–	–	–	–	–

EMOS

CLASSIC LED bulb

A60 SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZQ5142	8,5 W (60 W) / 806 lm / E27 / CW	F	ZQ5E44	7 W (60 W) / 806 lm / E27 / CW	E	8 592920 126509
ZQ5152	10,7 W (75 W) / 1 060 lm / E27 / CW	F	ZQ5E54	9,5 W (75 W) / 1 055 lm / E27 / CW	E	8 592920 126592
ZQ5162	13,2 W (100 W) / 1 521 lm / E27 / CW	E	ZQ5E64	13 W (100 W) / 1 521 lm / E27 / CW	E	8 592920 126684
ZQ5130	7,3 W (50 W) / 645 lm / E27 / WW	F	ZQ5E31	5,8 W (50 W) / 645 lm / E27 / WW	E	8 592920 126387
ZQ5140	8,5 W (60 W) / 806 lm / E27 / WW	F	ZQ5E41	7 W (60 W) / 806 lm / E27 / WW	E	8 592920 126448
ZQ5140.3	8,5 W (60 W) / 806 lm / E27 / WW / 3PC	F	ZQ5E41.3	7 W (60 W) / 806 lm / E27 / WW / 3PC	E	8 592920 126714
ZQ5150	10,7 W (75 W) / 1 060 lm / E27 / WW	F	ZQ5E51	9,5 W (75 W) / 1 055 lm / E27 / WW	E	8 592920 126530
ZQ5150.3	10,7 W (75 W) / 1 060 lm / E27 / WW / 3PC	F	ZQ5E51.3	9,5 W (75 W) / 1 055 lm / E27 / WW / 3PC	E	8 592920 126837
ZQ5160	13,2 W (100 W) / 1 521 lm / E27 / WW	E	ZQ5E61	13 W (100 W) / 1 521 lm / E27 / WW	E	8 592920 126622
ZQ5160.3	13,2 W (100 W) / 1 521 lm / E27 / WW / 3PC	E	ZQ5E61.3	13 W (100 W) / 1 521 lm / E27 / WW / 3PC	E	8 592920 126899
ZQ5120	5,2 W (40 W) / 470 lm / E27 / WW	F	ZQ5E21	4 W (40 W) / 470 lm / E27 / WW	E	8 592920 126325
ZQ5131	7,3 W (50 W) / 645 lm / E27 / NW	F	ZQ5E33	5,8 W (50 W) / 645 lm / E27 / NW	E	8 592920 126417
ZQ5141	8,5 W (60 W) / 806 lm / E27 / NW	F	ZQ5E43	7 W (60 W) / 806 lm / E27 / NW	E	8 592920 126479
ZQ5141.3	8,5 W (60 W) / 806 lm / E27 / NW / 3PC	F	ZQ5E43.3	7 W (60 W) / 806 lm / E27 / NW / 3PC	E	8 592920 126776
ZQ5151	10,7 W (75 W) / 1 060 lm / E27 / NW	F	ZQ5E53	9,5 W (75 W) / 1 055 lm / E27 / NW	E	8 592920 126561
ZQ5151.3	10,7 W (75 W) / 1 060 lm / E27 / NW / 3PC	F	ZQ5E53.3	9,5 W (75 W) / 1 055 lm / E27 / NW / 3PC	E	8 592920 126868
ZQ5161	13,2 W (100 W) / 1 521 lm / E27 / NW	E	ZQ5E63	13 W (100 W) / 1 521 lm / E27 / NW	E	8 592920 126653
ZQ5161.3	13,2 W (100 W) / 1 521 lm / E27 / NW / 3PC	F	ZQ5E63.3	13 W (100 W) / 1 521 lm / E27 / NW / 3PC	E	8 592920 126929
ZQ5121	5,2 W (40 W) / 470 lm / E27 / NW	F	ZQ5E23	4 W (40 W) / 470 lm / E27 / NW	E	8 592920 126356
ZL4206	3× DIMM / 10,5 W (75 W) / 1 060 lm / WW	F	ZQ5F52S	3× DIMM / 10,5W (75W) / 1 060lm / WW	F	8 592920 044360

A67 SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZQ5173	17 W (120 W) / 1 900 lm / E27 / WW	E	ZQ5E71	16 W (120 W) / 1 901 lm / E27 / WW	E	8 592920 126950
ZQ5174	17 W (120 W) / 1 900 lm / E27 / NW	E	ZQ5E73	16 W (120 W) / 1 901 lm / E27 / NW	E	8 592920 126981
ZQ5175	17W (120 W) / 1 900 lm / E27 / CW	E	ZQ5E74	16 W (120 W) / 1 901 lm / E27 / CW	E	8 592920 127018

A70 SHAPE

A67 SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZQ5183	19 W (150 W) / 2 452 lm / E27 / WW	E	ZQ5E81	20 W (150 W) / 2 452 lm / E27 / WW	E	8 592920 127049
ZQ5184	19 W (150 W) / 2 452 lm / E27 / NW	E	ZQ5E83	20 W (150 W) / 2 452 lm / E27 / NW	E	8 592920 127070
ZQ5185	19 W (150 W) / 2 452 lm / E27 / CW	E	ZQ5E84	20 W (150 W) / 2 452 lm / E27 / CW	E	8 592920 127100

A80 SHAPE

A95 SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
–	–	–	ZQ5E91	28 W (200 W) / 3 452 lm / E27 / WW	E	8 592920 130803
–	–	–	ZQ5E93	28 W (200 W) / 3 452 lm / E27 / NW	E	8 592920 130834

EMOS

CLASSIC LED bulb

CANDLE SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZQ3222	5 W (40 W) / 470 lm / E14 / CW	F	ZQ3E24	4,2 W (40 W) / 470 lm / E14 / CW	E	8 592920 127254
ZQ3232	7,3 W (60 W) / 806 lm / E14 / CW	E	ZQ3E44	6,5 W (60 W) / 806 lm / E14 / CW	E	8 592920 127346
ZQ3210	4,1 W (32 W) / 350 lm / E14 / WW	F	ZQ3D11	2,5 W (32 W) / 350 lm / E14 / WW	D	8 592920 127131
ZQ3220	5 W (40 W) / 470 lm / E14 / WW	F	ZQ3E21	4,2 W (40 W) / 470 lm / E14 / WW	E	8 592920 127193
ZQ3220.3	5 W (40 W) / 470 lm / E14 / WW / 3PC	F	ZQ3E21.3	4,2 W (40 W) / 470 lm / E14 / WW / 3PC	E	8 592920 127490
ZQ3230	7,3 W (60 W) / 806 lm / E14 / WW	E	ZQ3E41	6,5 W (60 W) / 806 lm / E14 / WW	E	8 592920 127285
ZQ3211	4,1 W (32 W) / 350 lm / E14 / NW	F	ZQ3D13	2,5 W (32 W) / 350 lm / E14 / NW	D	8 592920 127162
ZQ3221	5 W (40 W) / 470 lm / E14 / NW	F	ZQ3E23	4,2 W (40 W) / 470 lm / E14 / NW	E	8 592920 127223
ZQ3221.3	5 W (40 W) / 470 lm / E14 / NW / 3PC	F	ZQ3E23.3	4,2 W (40 W) / 470 lm / E14 / NW / 3PC	E	8 592920 127520
ZQ3231	7,3 W (60 W) / 806 lm / E14 / NW	E	ZQ3E43	6,5 W (60 W) / 806 lm / E14 / NW	E	8 592920 127315
ZQ3110	4,1 W (32 W) / 350 lm / E27 / WW	F	ZQ4D11	2,5 W (32 W) / 350 lm / E27 / WW	D	8 592920 127377
ZQ3120	4,9 W (40 W) / 470 lm / E27 / WW	F	ZQ4E21	4,2 W (40 W) / 470 lm / E27 / WW	E	8 592920 127438
ZQ3111	4,1 W (32 W) / 350 lm / E27 / NW	F	ZQ4D13	2,5 W (32 W) / 350 lm / E27 / NW	D	8 592920 127407
ZQ3121	4,9 W (40 W) / 470 lm / E27 / NW	F	ZQ4E23	4,2 W (40 W) / 470 lm / E27 / NW	E	8 592920 127469

MINI GLOBE SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZQ1222	5 W (40 W) / 470 lm / E14 / CW	F	ZQ1E24	4,2 W (40 W) / 470 lm / E14 / CW	E	8 592920 127704
ZQ1232	7,3 W (60 W) / 806 lm / E14 / CW	E	ZQ1E44	6,5 W (60 W) / 806 lm / E14 / CW	E	8 592920 127797
ZQ1210	4,1 W (32 W) / 330 lm / E14 / WW	F	ZQ1D11	2,5 W (32 W) / 350 lm / E14 / WW	D	8 592920 127551
ZQ1220	5 W (40 W) / 470 lm / E14 / WW	F	ZQ1E21	4,2 W (40 W) / 470 lm / E14 / WW	E	8 592920 127612
ZQ1220	5 W (40 W) / 470 lm / E14 / WW	F	ZQ1E21.3	4,2 W (40 W) / 470 lm / E14 / WW / 3PC	E	8 592920 127643
ZQ1230	7,3 W (60 W) / 806 lm / E14 / WW	E	ZQ1E41	6,5 W (60 W) / 806 lm / E14 / WW	E	8 592920 127735
ZQ1211	4,1 W (32 W) / 350 lm / E14 / NW	F	ZQ1D13	2,5 W (32 W) / 350 lm / E14 / NW	D	8 592920 127582
ZQ1221	5 W (40 W) / 470 lm / E14 / NW	F	ZQ1E23	4,2 W (40 W) / 470 lm / E14 / NW	E	8 592920 127674
ZQ1221	5 W (40 W) / 470 lm / E14 / NW	F	ZQ1E23.3	4,2 W (40 W) / 470 lm / E14 / NW / 3PC	E	8 592920 128060
ZQ1231	7,3 W (60 W) / 806 lm / E14 / NW	E	ZQ1E43	6,5 W (60 W) / 806 lm / E14 / NW	E	8 592920 127766
ZQ1122	5 W (40 W) / 470 lm / E27 / CW	F	ZQ6E24	4,2 W (40 W) / 470 lm / E27 / CW	E	8 592920 127940
ZQ1132	7,3 W (60 W) / 806 lm / E27 / CW	E	ZQ6E44	6,5 W (60 W) / 806 lm / E27 / CW	E	8 592920 128039
ZQ1110	4,1 W (32 W) / 350 lm / E27 / WW	F	ZQ6D11	2,5 W (32 W) / 350 lm / E27 / WW	D	8 592920 127827
ZQ1120	5 W (40 W) / 470 lm / E27 / WW	F	ZQ6E21	4,2 W (40 W) / 470 lm / E27 / WW	E	8 592920 127889
ZQ1120	5 W (40 W) / 470 lm / E27 / WW	F	ZQ6E21.3	4,2 W (40 W) / 470 lm / E27 / WW / 3PC	E	8 592920 128091
ZQ1130	7,3 W (60 W) / 806 lm / E27 / WW	E	ZQ6E41	6,5 W (60 W) / 806 lm / E27 / WW	E	8 592920 127971
ZQ1111	4,1 W (30 W) / 350 lm / E27 / NW	F	ZQ6D13	2,5 W (32 W) / 350 lm / E27 / NW	D	8 592920 127858
ZQ1121	5 W (40 W) / 470 lm / E27 / NW	F	ZQ6E23	4,2 W (40 W) / 470 lm / E27 / NW	E	8 592920 127919
ZQ1121	5 W (40 W) / 470 lm / E27 / NW	F	ZQ6E23.3	4,2 W (40 W) / 470 lm / E27 / NW / 3PC	E	8 592920 128121
ZQ1131	7,3 W (60 W) / 806 lm / E27 / NW	E	ZQ6E43	6,5 W (60 W) / 806 lm / E27 / NW	E	8 592920 128008

REFLECTOR SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZQ7220	4 W (39 W) / 450 lm / E14 / WW	E	ZQ7E21	4,2 W (40 W) / 470 lm / E14 / WW	E	8 592920 128152
ZQ7221	4 W (39 W) / 450 lm / E14 / NW	E	ZQ7E23	4,2 W (40 W) / 470 lm / E14 / NW	E	8 592920 128183
ZQ7140	8,8 W (60 W) / 806 lm / E27 / WW	F	ZQ7E41	7 W (60 W) / 806 lm / E27 / WW	E	8 592920 128213
ZQ7141	8,8 W (60 W) / 806 lm / E27 / NW	F	ZQ7E43	7 W (60 W) / 806 lm / E27 / NW	E	8 592920 128244

GU10/GU5.3 SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
-	-	-	ZQ8338	3 W (40 W) / 535lm / NW / A CLASS	A	8 592920 129470
ZL4780	7 W (70 W) / 580 lm / NW	F	ZQ8E33N	5,8 W (75 W) / 565 lm / NW	E	8 592920 128602
ZQ8342	3,8 W (30 W) / 320 lm / CW	G	ZQ8E14	3 W (32 W) / 345 lm / CW	E	8 592920 128336
ZQ8335	4,2 W (35 W) / 333 lm / CW	F	ZQ8E19	3 W (32 W) / 345 lm / CW	E	8 592920 128572
ZQ8372	8,4 W (60 W) / 806 lm / CW	F	ZQ8E44	7 W (60 W) / 806 lm / CW	E	8 592920 128480
ZQ8340	3,8 W (30 W) / 320 lm / WW	G	ZQ8E12	3 W (32 W) / 345 lm / WW	E	8 592920 128275
ZQ8340.3	3,8 W (30 W) / 320 lm / WW / 3PC	G	ZQ8E12.3	3 W (32 W) / 345 lm / WW / 3PC	E	8 592920 128633
ZQ8350	5,7 W (40 W) / 465 lm / WW	G	ZQ8E22	4 W (39 W) / 450 lm / WW	E	8 592920 128367
ZQ8333	4,2 W (35 W) / 333 lm / WW	F	ZQ8E17	3 W (32 W) / 345 lm / WW	E	8 592920 128510
ZQ8370	8,4 W (60 W) / 806 lm / WW	F	ZQ8E42	7 W (60 W) / 806 lm / WW	E	8 592920 128428
ZQ8370.3	8,4 W (60 W) / 806 lm / WW / 3PC	F	ZQ8E42.3	7 W (60 W) / 806 lm / WW / 3PC	E	8 592920 128664
ZQ8341	3,8 W (30 W) / 320 lm / NW	G	ZQ8E13	3 W (32 W) / 345 lm / NW	E	8 592920 128305
ZQ8351	5,7 W (40 W) / 465 lm / NW	G	ZQ8E23	4 W (39 W) / 450 lm / NW	E	8 592920 128398
ZQ8334	4,2 W (35 W) / 333 lm / NW	F	ZQ8E18	3 W (32 W) / 345 lm / NW	E	8 592920 128541
ZQ8371	8,4 W (60 W) / 806 lm / NW	F	ZQ8E43	7 W (60 W) / 806 lm / NW	E	8 592920 128459
ZQ8371.3	8,4 W (60 W) / 806 lm / NW / 3PC	F	ZQ8E43.3	7 W (60 W) / 806 lm / NW / 3PC	E	8 592920 128695
-	-	-	ZQ8155D	DIM / 7 W (60 W) / 800 lm / GU10 / WW	E	8 592920 125144
-	-	-	ZQ8255D	DIM / 7 W (60 W) / 800 lm / NW	E	8 592920 125175
ZL4301	3×DIM / 6,1 W (45 W) / 560 lm / WW	F	ZQ8155S	3×DIM / 7 W (60 W) / 800 lm / WW	E	8 592920 125205
-	-	-	ZQ8255S	3×DIM / 7 W / (60 W) / 800 lm / NW	E	8 592920 125236
–	–	–	ZQ8433	4.5W (28W) / 380 lm / GU5.3 / WW	F	8 592920 056110
–	–	–	ZQ8434	4.5W (31W) / 380 lm / GU5.3 / NW	F	8 592920 056141

EMOS

CLASSIC LED bulb

TVAR G9/G4

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
–	–	–	ZQ8620	1.9W (21W) / 200 lm / G4 / WW	F	8 592920 046661
–	–	–	ZQ8620.2	1.9W (21W) / 200 lm / G4 / WW / 2PC	F	8 592920 122983
–	–	–	ZQ8621	1.9W (21W) / 200 lm / G4 / NW	F	8 592920 046692
–	–	–	ZQ8621.2	1.9W (21W) / 200 lm / G4 / NW / 2PC	F	8 592920 123010
–	–	–	ZQ9526	1.9W(22W) / 210 lm / G9 / WW	E	8 592920 114490
–	–	–	ZQ9544.2	4W (40W) / 470 lm / G9 / WW / 2PC	E	8 592920 119129
–	–	–	ZQ9535	2.5W (32W) / 350 lm / G9 / WW	D	8 592920 119006
–	–	–	ZQ9544	4W (40W) / 470 lm / G9 / WW	E	8 592920 119068
–	–	–	ZQ9527	1.9W (21W) / 210 lm / G9 / NW	E	8 592920 114520
–	–	–	ZQ9545.2	4W (40W) / 470 lm / G9 / NW / 2PC	E	8 592920 119150
–	–	–	ZQ9536	2.5W (32W) / 350 lm / G9 / NW	D	8 592920 119037
–	–	–	ZQ9545	4W (40W) / 470 lm / G9 / NW	E	8 592920 119099
–	–	–	ZQ9D32	4.3W (48W) / 600 lm / G9 / WW	D	8 592920 150597
–	–	–	ZQ9D33	4.3W (48W) / 600 lm / G9 / NW	D	8 592920 150627
–	–	–	ZQ9D34	4.3W (48W) / 600 lm / G9 / CW	D	8 592920 150658
–	–	–	ZQ9C42	4.9W (60W) / 806 lm / G9 / WW	C	8 592920 150689
–	–	–	ZQ9C43	4.9W (60W) / 806 lm / G9 / NW	C	8 592920 150719
–	–	–	ZQ9C44	4.9W (60W) / 806 lm / G9 / CW	C	8 592920 150740
ZQ9125D	DIM / 4.2 W (40 W) / 470 lm / WW	E	ZQ9E22D	DIM / 4W (40W) / 470 lm / G9 / WW	E	8 592920 142967
ZQ9225D	DIM / 4.2 W (40 W) / 470 lm / WW	E	ZQ9E24D	DIM / 4W (40W) / 470 lm / G9 / NW	E	8 592920 142998

TVAR A60

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
–	–	–	ZF5147	3,8 W (60 W) / 806 lm / E27 / WW	A	8 592920 120569
–	–	–	ZF5147.3	3,8 W (60 W) / 806 lm / E27 / WW / 3 PC	A	8 592920 120590
–	–	–	ZF5148	3,8 W (60 W) / 806 lm / E27 / NW	A	8 592920 120620
–	–	–	ZF5148.3	3,8 W (60 W) / 806 lm / E27 / NW / 3 PC	A	8 592920 120651
–	–	–	ZF5157	5 W (75 W) / 1 060 lm / E27 / WW	A	8 592920 120682
–	–	–	ZF5157.3	5 W (75 W) / 1 060 lm / E27 / WW / 3 PC	A	8 592920 120712
–	–	–	ZF5158	5 W (75 W) / 1 060 lm / E27 / NW	A	8 592920 120743
–	–	–	ZF5158.3	5 W (75 W) / 1 060 lm / E27 / NW / 3 PC	A	8 592920 120774
–	–	–	ZF5167	7,2 W (100 W) / 1 521 lm / E27 / WW	A	8 592920 126103
–	–	–	ZF5168	7,2 W (100 W) / 1 521 lm / E27 / NW	A	8 592920 126134
Z74284	11 W (100 W) / 1 521 lm / E27 / WW	D	ZF5D62	10,5 W (100 W) / 1 521 lm / E27 / WW	D	8 592920 129890
ZF5120	3,4 W (40 W) / 470 lm / E27 / WW	D	ZF5D22	3,4 W (40 W) / 470 lm / E27 / WW	D	8 592920 129715
ZF5140	5,9 W (60 W) / 806 lm / E27 / WW	D	ZF5D42	5,9 W (60 W) / 806 lm / E27 / WW	D	8 592920 129777
ZF5140.2	5,9 W (60 W) / 806 lm / E27 / WW / 2 PC	D	ZF5D42.2	5,9 W (60 W) / 806 lm / E27 / WW / 2 PC	D	8 592920 130049
ZF5150	7,8 W (75 W) / 1 060 lm / E27 / WW	D	ZF5D52	7,8 W (75 W) / 1 060 lm / E27 / WW	D	8 592920 129838
Z74285	11 W (100 W) / 1 521 lm / E27 / NW	D	ZF5D63	10,5 W (100 W) / 1 521 lm / E27 / NW	D	8 592920 129920
ZF5121	3,4 W (40 W) / 470 lm / E27 / NW	D	ZF5D23	3,4 W (40 W) / 470 lm / E27 / NW	D	8 592920 142783
ZF5141	5,9 W (60 W) / 806 lm / E27 / NW	D	ZF5D43	5,9 W (60 W) / 806 lm / E27 / NW	D	8 592920 129807
ZF5151	7,8 W (75 W) / 1 060 lm / E27 / NW	D	ZF5D53	7,8 W (75 W) / 1 060 lm / E27 / NW	D	8 592920 129869
ZF5154D	DIM / 7.5W (75W) / 1055 lm / E27 / WW	D	ZF5D52D	DIM / 7.5W (75W) / 1055 lm / E27 / WW	D	8 592920 14278
ZF5254D	DIM / 7.5W (75W) / 1055 lm / E27 / NW	D	ZF5D54D	DIM / 7.5W (75W) / 1055 lm / E27 / NW	D	8 592920 142813
ZF5164D	DIM / 11W (100W) / 1521 lm / E27 / WW	D	ZF5D62D	DIM / 11W (100W) / 1521 lm / E27 / WW	D	8 592920 142844
ZF5264D	DIM / 11W (100W) / 1521 lm / E27 / NW	D	ZF5D64D	DIM / 11W (100W) / 1521 lm / E27 / NW	D	8 592920 142875

TVAR CANDLE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
–	–	–	ZF3A42	3.8W (60W) / 806 lm / E14 / WW	A	8 592920 135631
–	–	–	ZF3A43	3.8W (60W) / 806 lm / E14 / NW	A	8 592920 135662
ZF3200	1,8 W (25 W) / 250 lm / E14 / WW /	D	ZF3D02	1,8 W (25 W) / 250 lm / E14 / WW	D	8 592920 130018
ZF3220	3,4 W (40 W) / 470 lm / E14 / WW /	D	ZF3D22	3,4 W (40 W) / 470 lm / E14 / WW	D	8 592920 130100
ZF3240	6 W (60 W) / 810 lm / E14 / WW	D	ZF3D42	5,9 W (60 W) / 806 lm / E14 / WW	D	8 592920 130162
–	–	–	ZF3D52	7W (75W) / 1055 lm / E14 / WW	D	8 592920 135754
ZF3201	1,8 W (25 W) / 250 lm / E14 / NW /	D	ZF3D03	1,8 W (25 W) / 250 lm / E14 / NW	D	8 592920 130070
ZF3221	3,4 W (40 W) / 470 lm / E14 / NW /	D	ZF3D23	3,4 W (40 W) / 470 lm / E14 / NW	D	8 592920 130131
ZF3241	6 W (60 W) / 810 lm / E14 / NW	D	ZF3D43	5,9 W (60 W) / 806 lm / E14 / NW	D	8 592920 130193
–	–	–	ZF3D53	7W (75W) / 1055 lm / E14 / NW	D	8 592920 135785

A70 SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
Z74290	17 W (150 W) / 2 452 lm / E27 / WW	D	ZF5D82	18 W (150 W) / 2 452 lm / E27 / WW	D	8 592920 129951
Z74291	17 W (150 W) / 2 452 lm / E27 / NW	D	ZF5D83	18 W (150 W) / 2 452 lm / E27 / NW	D	8 592920 129982

TVAR MINI GLOBE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
–	–	–	ZF1A42	3.8W (60W) / 806 lm / E14 / WW	A	8 592920 135693
–	–	–	ZF1A43	3.8W (60W) / 806 lm / E14 / NW	A	8 592920 135723
ZF1240	6 W (60 W) / 810 lm / E14 / WW	D	ZF1D42	5,9 W (60 W) / 806 lm / E14 / WW	D	8 592920 130346
–	–	–	ZF1D52	7W (75W) / 1055 lm / E14 / WW	D	8 592920 135815
–	–	–	ZF1D53	7W (75W) / 1055 lm / E14 / NW	D	8 592920 135846
ZF1221	3,4 W (40 W) / 470 lm / E14 / NW	D	ZF1D23	3,4 W (40 W) / 470 lm / E14 / NW	D	8 592920 130315
ZF1241	6 W (60 W) / 810 lm / E14 / NW	D	ZF1D43	5,9 W (60 W) / 806 lm / E14 / NW	D	8 592920 130377
ZF1100	1,8 W (25 W) / 250 lm / E27 / WW	D	ZF6D02	1,8 W (25 W) / 250 lm / E27 / WW	D	8 592920 130407
ZF1200	1,8 W (25 W) / 250 lm / E14 / WW	D	ZF1D02	1,8 W (25 W) / 250 lm / E14 / WW	D	8 592920 130223
ZF1220	3,4 W (40 W) / 470 lm / E14 / WW	D	ZF1D22	3,4 W (40 W) / 470 lm / E14 / WW	D	8 592920 130285
ZF1201	1,8 W (25 W) / 250 lm / E14 / NW	D	ZF1D03	1,8 W (25 W) / 250 lm / E14 / NW	D	8 592920 130254
ZF1120	3,4 W (40 W) / 470 lm / E27 / WW	D	ZF6D22	3,4 W (40 W) / 470 lm / E27 / WW	D	8 592920 130469
ZF1140	6 W (60 W) / 810 lm / E27 / WW	D	ZF6D42	5,9 W (60 W) / 806 lm / E27 / WW	D	8 592920 130520
ZF1101	1,8 W (25 W) / 250 lm / E27 / NW	D	ZF6D03	1,8 W (25 W) / 250 lm / E27 / NW	D	8 592920 130438
ZF1121	3,4 W (40 W) / 470 lm / E27 / NW	D	ZF6D23	3,4 W (40 W) / 470 lm / E27 / NW	D	8 592920 130490
ZF1141	6 W (60 W) / 810 lm / E27 / NW	D	ZF6D43	5,9 W (60 W) / 806 lm / E27 / NW	D	8 592920 130551

GLOBE SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZF2150	7,8 W (75 W) / 1055 lm / E27 / WW	D	ZF2D52	7,8 W (75 W) / 1055 lm / E27 / WW	D	8 592920 130582
ZF2151	7,8 W (75 W) / 1055 lm / E27 / NW	D	ZF2D53	7,8 W (75 W) / 1055 lm / E27 / NW	D	8 592920 130605
ZF2160	11 W (100 W) / 1 521 lm / E27 / WW	D	ZF2D62	11 W (100 W) / 1 521 lm / E27 / WW	D	8 592920 130629
ZF2180	18 W (150 W) / 2 452 lm / E27 / WW	D	ZF2D82	18 W (150 W) / 2 452 lm / E27 / WW	D	8 592920 130667
ZF2161	11 W (100 W) / 1 521 lm / E27 / NW	D	ZF2D63	11 W (100 W) / 1 521 lm / E27 / NW	D	8 592920 130643
ZF2181	18 W (150 W) / 2 452 lm / E27 / NW	D	ZF2D83	18 W (150 W) / 2 452 lm / E27 / NW	D	8 592920 130681

HIGH POWER SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZL5751	LED / CLS / T140 / 44,5 W (270 W) / 4 850 lm / E27 / NW	F	ZF5751	LED / FLM / ED90 / 36 W (327 W) / 6 000 lm / E27 / NW	C	8 592920 131732
ZL5754	LED / CLS / T140 / 44,5 W (270 W) / 4 850 lm / E40 / NW	F	ZF5754	LED / FLM / ED90 / 36 W (327 W) / 6 000 lm / E40 / NW	C	8 592920 131718

TVAR A60

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZL5F42	8.5 W (60 W) / 806 lm / E27 / WW	F	ZL5F47	8.8W (60W) / 806 lm / E27 / WW	F	8 592920 143988
ZL5F42.3	8.5 W (60 W) / 806 lm / E27 / WW / 3 PC	F	ZL5F47.3	8.8W (60W) / 806 lm / E27 / WW / 3PC	F	8 592920 144015
ZL5F42.6	8.5 W (60 W) / 806 lm / E27 / WW / 6 PC	F	ZL5F47.6	8.8W (60W) / 806 lm / E27 / WW / 6PC	F	8 592920 144039
ZL5F52	9.5 W (75 W) / 1 055 lm / E27 / WW	E	ZL5F57	11W (75W) / 1055 lm / E27 / WW	F	8 592920 144121
ZL5F62	13 W (100 W) / 1 521 lm / E27 / WW	E	ZL5F67	15.3W (100W) / 1521 lm / E27 / WW	F	8 592920 144183
ZL5F43	8.5 W (60 W) / 806 lm / E27 / NW	F	ZL5F48	8.8W (60W) / 806 lm / E27 / NW	F	8 592920 144053
ZL5F43.3	8.5 W (60 W) / 806 lm / E27 / NW / 3 PC	F	ZL5F48.3	8.8W (60W) / 806 lm / E27 / NW / 3PC	F	8 592920 144084
ZL5F43.6	8.5 W (60 W) / 806 lm / E27 / NW / 6 PC	F	ZL5F48.6	8.8W (60W) / 806 lm / E27 / NW / 6PC	F	8 592920 144107
ZL5F53	9.5 W (75 W) / 1 055 lm / E27 / NW	E	ZL5F58	11W (75W) / 1055 lm / E27 / NW	F	8 592920 144152
ZL5F63	13 W (100 W) / 1 521 lm / E27 / NW	E	ZL5F68	15.3W (100W) / 1521 lm / E27 / NW	F	8 592920 144213

TVAR CANDLE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZL4102	6 W (42 W) / 500 lm / E14 / WW	F	ZL3F22	4,8 W (40 W) / 470 lm / E14 / WW	F	8 592920 134337
ZL4108	6 W (42 W) / 510 lm / E27 / WW	F	ZL4F22	4,8 W (40 W) / 470 lm / E27 / WW	F	8 592920 134368
ZL1F42	8.5 W (60 W) / 806 lm / E14 / WW	F	ZL3F47	8.8W (60W) / 806 lm / E14 / WW	F	8 592920 144244
ZL1F43	8.5 W (60 W) / 806 lm / E14 / NW	F	ZL3F48	8.8W (60W) / 806 lm / E14 / NW	F	8 592920 144275
–	–	–	ZL3F23	4,8 W (40 W) / 470 lm / E14 / NW	F	8 592920 134788

TVAR MINI GLOBE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
ZL3904	9,4 W (60 W) / 806 lm / E14 / WW	F	ZL1F22	4,8 W (40 W) / 470 lm / E14 / WW	F	8 592920 134450
ZL3907	9,4 W (60 W) / 806 lm / E14 / WW	F	ZL6F22	4,8 W (40 W) / 470 lm / E27 / WW	F	8 592920 134481
ZL1F42	8.5 W (60 W) / 806 lm / E14 / WW	F	ZL1F47	8.8W (60W) / 806 lm / E14 / WW	F	8 592920 144305
ZL1F43	8.5 W (60 W) / 806 lm / E14 / NW	F	ZL1F48	8.8W (60W) / 806 lm / E14 / NW	F	8 592920 144336
–	–	–	ZL1F23	4,8 W (40 W) / 470 lm / E14 / NW	F	8 592920 134726
–	–	–	ZL6F23	4,8 W (40 W) / 470 lm / E27 / NW	F	8 592920 134757

GU10 SHAPE

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
Z75060	3,3 W (21 W) / 205 lm / GU10 / NW	F	ZL8F03	2,9 W (25 W) / 250 lm / GU10 / NW	F	8 592920 134603
Z75040	3,3 W (21 W) / 200 lm / GU10 / WW	F	ZL8F02	2,9 W (25 W) / 250 lm / GU10 / WW	F	8 592920 134573
Z75130	5,8 W (40 W) / 470 lm / GU10 / WW	F	ZL8F22	5,5 W (42 W) / 500 lm / GU10 / WW	F	8 592920 134634
Z75140	5,8 W (42 W) / 500 lm / GU10 / NW	F	ZL8F23	5,5 W (42 W) / 500 lm / GU10 / NW	F	8 592920 134665

DECO LED bulbs

Old model			New model			
Order code	Parameters	Energy class	Order code	Parameters	Energy class	EAN
–	–	–	Z59D01	LED DECO S123 "DNA" 3.5W 130 lm E27 WW+	G	8 592920 148624
–	–	–	Z50B11	LED DECO CG125A "BURGEON" 4.5W 240 lm E27 WW+	G	8 592920 148648
–	–	–	Z5AI01	LED DECO T30 "ONE" 2W 100 lm E27 WW+	G	8 592920 148662
–	–	–	Z5BO11	LED DECO G130OA "O" 4W 220 lm E27 WW+	G	8 592920 148693
–	–	–	Z5CS11	LED DECO G130SRA "SATURN" 4W 220 lm E27 WW+	G	8 592920 148716
–	–	–	Z59G01	LED DECO S123 "GRADIENT" 4W 150 lm E27 WW+	G	8 592920 148730
–	–	–	Z55311	LED DECO A60 SMOKED 4.5W 180lm E27 WW+	G	8 592920 149003
–	–	–	Z57311	LED DECO ST64 SMOKED 4.5W 180lm E27 WW+	G	8 592920 149034
–	–	–	Z52311	LED DECO G95 SMOKED 4.5W 180lm E27 WW+	G	8 592920 149065
–	–	–	Z58311	LED DECO G125 SMOKED 4.5W 180lm E27 WW+	G	8 592920 149089
Z74300	CANDLE / 2,1 W (20 W) / 190 lm / E14 / WW+	F	Z53012	CANDLE / 2,5 W (20 W) / 225 lm / E14 / WW+	F	8 592920 133828
Z74301	A60 / 4,3 W (35 W) / 400 lm / E27 / WW+	E	Z55032	A60 / 4,5 W (35 W) / 420 lm / E27 / WW+	F	8 592920 133927
Z74302	ST64 / 4 W (40 W) / 470 lm / E27 / WW+	F	Z57032	ST64 / 4,5 W (40 W) / 420 lm / E27 / WW+	F	8 592920 133859
Z74303	G125 / 4 W (40 W) / 470 lm / E27 / WW+	E	Z58032	G125 / 4,5 W (40 W) / 420 lm / E27 / WW+	F	8 592920 133880
Z74304	G95 / 4 W (40 W) / 470 lm / E27 / WW+	E	Z52032	G95 / 4,5 W (40 W) / 420 lm / E27 / WW+	F	8 592920 133903

Ultra Plus

Old model		New model			
Order code	Battery type	Order code	Parameters	Battery type	EAN
B17112	AAA	B03112	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AAA	4 891199 218163
B1711	AAA	B03114	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AAA	4 891199 203985
B1911G	AAA	B0314G	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 10 pc, small paper box	AAA	4 891199 222252
B17212	AA	B03212	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AA	4 891199 216633
B1721	AA	B03214	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AA	4 891199 203923
–	–	B0324G	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 10 pc, small paper box	AA	4 891199 222238
B1731	C	B03312	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	C	4 891199 217654
B1741	D	B03412	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	D	4 891199 220159
B1751	9 V	B03511	voltage: 9 V; price for quantity: price per 1 pc; packaging: 1 pc, small paper box	9 V	4 891199 216442

Ultra

Old model		New model			
Order code	Battery type	Order code	Parameters	Battery type	EAN
–	–	B02112	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AAA	4 891199 218101
B1911	AAA	B02114	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AAA	4 891199 218255
B1911MM	AAA	B0211V	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 6 pcs, small paper box	AAA	4 891199 218347
B02118	AAA	B02138	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 8 pcs, small paper box	AAA	4 891199 218408
B1921	AA	B02214	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AA	4 891199 217357
B1921MM	AA	B0221V	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 6 pcs, small paper box	AA	4 891199 217388
B02218	AA	B02238	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 8 pcs, small paper box	AA	4 891199 217449
B1931	C	B02312	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	C	4 891199 217753
B1941	D	B02412	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	D	4 891199 220166
B1951	9 V	B02511	voltage: 9 V; price for quantity: price per 1 pc; packaging: 1 pc, small paper box	9 V	4 891199 216398

Super

Old model		New model			
Order code	Battery type	Order code	Parameters	Battery type	EAN
B1310	AAA	B01102	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, shrink	AAA	4 891199 217968
B1311	AAA	B01114	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AAA	4 891199 218224
B1310G	AAA	B0111G	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 10 pc, small paper box	AAA	4 891199 224089
B1310L	AAA	B0110L	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 20 pcs, shrink	AAA	4 891199 224577
B1310T2	AAA	B0114T	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 288 pcs, display box	AAA	4 891199 224430
B1320	AA	B01202	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, shrink	AA	4 891199 216671
B1321	AA	B01214	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AA	4 891199 216763
B01218	AA	B01238	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 8 pcs, small paper box	AA	4 891199 217258
B1320G	AA	B0121G	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 10 pc, small paper box	AA	4 891199 224072
B1320L	AA	B0120L	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 20 pcs, shrink	AA	4 891199 224546
B1320T2	AA	B0124T	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 288 pcs, display box	AA	4 891199 224416
B1330	C	B01302	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, shrink	C	4 891199 217814
B13304	C	B01304	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, shrink	C	4 891199 217883
B1331	C	B01312	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	C	4 891199 217784
B1341	D	B01412	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	D	4 891199 220142
B1340	D	B01402	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, shrink	D	4 891199 219061
B13404	D	B01404	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 4 pcs, shrink	D	4 891199 219313
B1341	D	B01412	voltage: 1.5 V; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	D	4 891199 220142
B1351	9 V	B01511	voltage: 9 V; price for quantity: price per 1 pc; packaging: 1 pc, small paper box	9 V	4 891199 216251
B1350	9 V	B01501	voltage: 9 V; price for quantity: price per 1 pc; packaging: 1 pc, shrink	9 V	4 891199 216282

Recyko Pro

Old model		New model			
Order code	Battery type	Order code	Parameters	Battery type	EAN
B22184	AAA	B26184	voltage: 1.2 V; capacity: 800 mAh; number of charging cycles: more than 1 500; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AAA	4 891199 218347
B2218V	AAA	B2618V	voltage: 1.2 V; capacity: 800 mAh; number of charging cycles: more than 1 500; price for quantity: price per 1 pc; packaging: 6 pcs, small paper box	AAA	4 891199 219603
B22204	AA	B26204	voltage: 1.2 V; capacity: 2 000 mAh; number of charging cycles: more than 1 500; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AA	4 891199 218255
B2220V	AA	B2620V	voltage: 1.2 V; capacity: 2 000 mAh; number of charging cycles: more than 1 500; price for quantity: price per 1 pc; packaging: 6 pcs, small paper box	AA	4 891199 217357
B2420	AA	B2629	voltage: 1.2 V; capacity: 2 000 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AA	4 891199 217388

Recyko

Old model		New model			
Order code	Battery type	Order code	Parameters	Battery type	EAN
B21114	AAA	B25114	voltage: 1.2 V; capacity: 950 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AAA	4 891199 212635
B2111V	AAA	B2511V	voltage: 1.2 V; capacity: 950 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 6 pcs, small paper box	AAA	4 891199 222351
B2111	AAA	B25112	voltage: 1.2 V; capacity: 950 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AAA	4 891199 212628
–	–	B25184	voltage: 1.2 V; capacity: 850 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AAA	4 891199 212659
B2116	AAA	B25162	voltage: 1.2 V; capacity: 650 mAh; number of charging cycles: more than 1 000; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AAA	4 891199 212666
B2127	AA	B25272	voltage: 1.2 V; capacity: 2 600 mAh; number of charging cycles: more than 300; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AA	4 891199 212567
B21274	AA	B25274	voltage: 1.2 V; capacity: 2 600 mAh; number of charging cycles: up to 300; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AA	4 891199 212574
B2127V	AA	B2527V	voltage: 1.2 V; capacity: 2 600 mAh; number of charging cycles: up to 300; price for quantity: price per 1 pc; packaging: 6 pcs, small paper box	AA	4 891199 222368
B2121	AA	B25212	voltage: 1.2 V; capacity: 2 100 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AA	4 891199 212581
–	–	B25214	voltage: 1.2 V; capacity: 2 100 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 4 pcs, small paper box	AA	4 891199 212598
B2121V	AA	B2521V	voltage: 1.2 V; capacity: 2 100 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 6 pcs, small paper box	AA	4 891199 222375
B2123	AA	B25232	voltage: 1.2 V; capacity: 1 300 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	AA	4 891199 212604
B2133	C	B2533	voltage: 1.2 V; capacity: 3 000 mAh; number of charging cycles: more than 1 000; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	C	4 891199 212697
B2145	D	B2543	voltage: 1.2 V; capacity: 3 000 mAh; number of charging cycles: more than 1 000; price for quantity: price per 1 pc; packaging: 2 pcs, small paper box	D	4 891199 212703
B2152	9 V	B2552	voltage: 8.4 V; capacity: 200 mAh; number of charging cycles: more than 500; price for quantity: price per 1 pc; packaging: 1 pc, small paper box	9 V	4 891199 212710
B25116	AAA	B25186	voltage: 1.2 V, capacity: 850 mAh, number of charging cycles: more than 500, packaging: 6 pcs, small paper box	AAA	4 891199 234699
B2521V	AA	B25216	voltage: 1.2 V, capacity: 2 100 mAh, number of charging cycles: more than 500, packaging: 6 pcs, small paper box	AA	4 891199 234675

Explanatory notes and useful links



Children‘s safety plugs

This icon in the catalogue refers to the presence of children's safety plugs in outlets of extension cords or surge protections.



E-shop for Business Partners

We have an e-shop for business partners at **https://en.b2b.emos.cz**.
Take advantage of the benefits of online purchasing of our products anywhere you need.

Manuals for Goods

https://www.emos.eu/download
Here you can find all manuals for goods we have available, even for items no longer on offer.
Manuals can also be downloaded from the product details.



Photometric data

https://www.emos.eu/download
Here you can find photometric data for processing lighting projects using software tools such as DIALUX or RELUX.



A/ B/ C/ D

Packaging

A – retail packaging
B – number of products in a group packaging
C – number of products per inner carton
D – number of products per export carton

Misprints reserved. Illustrative images can be used. Package modification reserved.











Making Life Easy

EMOS spol. s r.o.
Lipnicka 2844
750 02 Prerov
Czech Republic

e-mail: emos@emos.cz
phone: +420 581 261 111

www.emos.eu/en

Y11443

8 592920 161296

